

BY FNT



CABLOND

CABLE TERMINATIONS

BY GROUP FNT

COMPANY PROFILE

CABLOND is a brand conceptualized by FNT, a well-established and Government recognized export house. This brand was established in order to market the company's in house manufactured products under a distinct identity from India.

The products that fall under this brand are:

- Copper Cable Terminal Lugs
- Cable Glands

The company's core objectives are Quality and Economy. The constant effort to fulfill these objectives ensures timely up gradation of technology and keeping abreast with the developments and trends in the industry.

CABLOND products are sold exclusively in the overseas markets, which ensures complete adherence to international quality standards and specifications. The customer base ranges over a large variety of industries, which has resulted in a manufacturing facility with the capacity and capability to customize as per the client's requirements.

Quality Control forms one of the most important departments of the company. The company's management as well as manufacturing activities are certified by ISO 9001:2000. This authenticates the stringent quality control and inspection carried out at the manufacturing facility at every stage of the manufacturing process.

The company uses state of the art machinery as well as best quality raw material with the most efficient manpower and timely delivery to meet customer and market demands, which has given the company a good reputation in the overseas markets.

QUALITY POLICY

"Exporting of Engineering and Electrical Components, Fittings & Accessories as per Customer Specification"

We at Cablond Overseas Trading Pvt. Ltd. are committed to achieve Total Customer Satisfaction
by
Continually Improving the Effectiveness of Quality Management System
&
Meeting Statutory & Regulatory Requirements

Group FNT

PRODUCT RANGE

CABLE GLANDING

CABLE TERMINATION

GALVANISED FLEXIBLE CONDUITS & ACCESSORIES

CABLOND AROUND THE WORLD

GULF COUNTRIES



BAHRAIN



OMAN



QATAR



SAUDI ARABIA



SUDAN



UNITED ARAB EMIRATES

AFRICAN COUNTRIES



BOTSWANA



GAMBIA



KENYA



NIGERIA



SOUTH AFRICA



TANZANIA



UGANDA



ZAMBIA

SOUTH EAST ASIA



MALAYSIA



SINGAPORE

OTHER COUNTRIES



AUSTRALIA



NEW ZEALAND



US

CABLE LUGS


- COPPER CABLE TERMINALS (LUGS)
- IN LINE CONNECTORS (FERRULES)
- SCREW CONNECTORS
- COPPER COMPRESSION TERMINALS - N SERIES
- COPPER COMPRESSION TERMINALS - DIN SERIES
- LONG BARREL TERMINALS
- WIRE PIN TERMINALS
- BI - METALLIC TERMINALS
- PRE - INSULATED TERMINALS
- SPLIT BOLT CONNECTORS
- 'C' TYPE CONNECTORS
- ALUMINUM CABLE TERMINALS
- ALUMINUM CONNECTORS
- MECHANICAL CABLE LUGS

CABLE GLANDS

- BW BRASS CABLE GLANDS
- CW BRASS CABLE GLANDS
- A1A2 BRASS CABLE GLANDS
- DOUBLE COMPRESSION CABLE GLANDS(E1W)
- SINGLE COMPRESSION CABLE GLANDS
- ALCO GLANDS
- CABLOND CABLE GLAND KITS


COPPER CRIMPING TERMINALS (LUGS)

MATERIAL: E COPPER BS: 1977
SURFACE: TIN PLATED WITH OR
WITHOUT INSPECTION HOLE

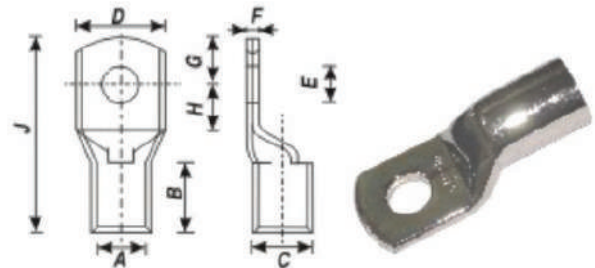

Size Sq.mm	Dimensions						Cat. Code
	E	A	C	D	B	J	
1.5	4.2	1.8	3.7	8	5	16	CDCL 1.5-4
	5.2	1.8	3.7	8	5	16	CDCL 1.5-5
	6.4	1.8	3.7	10	5	18	CDCL 1.5-6
2.5	4.2	2.4	4.0	8	7	18	CDCL 2.5-4
	5.2	2.4	4.0	10	7	20	CDCL 2.5-5
	6.4	2.4	4.0	10	7	20	CDCL 2.5-6
	8.4	2.4	4.0	11.5	7	24	CDCL 2.5-8
4	4.2	3.1	4.8	10	7	20	CDCL 4-4
	5.2	3.1	4.8	10	7	20	CDCL 4-5
	6.4	3.1	4.8	10	7	20	CDCL 4-6
	8.4	3.1	4.8	11.5	7	25	CDCL 4-8
6	5.2	3.8	5.5	10	9	23	CDCL 6-5
	6.5	3.8	5.5	12	9	27	CDCL 6-6
	8.4	3.8	5.5	12	9	27	CDCL 6-8
	10.5	3.8	5.5	15	9	32	CDCL 6-10
10	5.2	4.5	6.2	12	9	25	CDCL 10-5
	6.5	4.5	6.2	12	9	25	CDCL 10-6
	8.4	4.5	6.2	12	9	27	CDCL 10-8
	10.5	4.7	7.1	14	10	32	CDCL 10-10
	12.7	4.7	7.1	18	10	32	CDCL 10-12
16	5.2	5.4	7.1	12	12	30	CDCL 16-5
	6.5	4.5	7.1	12	12	30	CDCL 16-6
	8.4	4.5	7.1	12	12	32	CDCL 16-8
	10.5	4.7	7.1	14.5	13	35	CDCL 16-10
	12.7	4.7	7.9	18	13	39	CDCL 16-12
25	6.4	6.8	8.8	13	12	30	CDCL 25-6
	8.4	6.8	8.8	16	12	37	CDCL 25-8
	10.5	6.8	8.8	16	12	35	CDCL 25-10
	12.7	6.8	8.8	16.5	14	40	CDCL 25-12
35	6.5	8.2	10.6	15.3	12	35	CDCL 35-6
	8.4	8.2	10.6	15.3	12	35	CDCL 35-8
	10.5	8.2	10.6	18	12	38	CDCL 35-10
	12.7	8.2	10.6	17	15	42	CDCL 35-12
50	6.5	9.5	12.4	18	16	43	CDCL 50-6
	8.4	9.5	12.4	18	16	43	CDCL 50-8
	10.5	9.5	12.4	18	16	43	CDCL 50-10
	12.7	9.5	12.4	18	16	43	CDCL 50-12
	17.0	9.5	12.4	22	18	52	CDCL 50-16
70	6.4	11.2	14.7	21	18	50	CDCL 70-6
	8.4	11.2	14.7	21	18	50	CDCL 70-8
	10.5	11.2	14.7	21	18	50	CDCL 70-10
	13.0	11.2	14.7	21	18	50	CDCL 70-12
	15.0	11.2	14.7	25	20	55	CDCL 70-14
	17.0	11.2	14.7	25	20	55	CDCL 70-16
	21.0	11.2	14.7	26	20	55	CDCL 70-20


COPPER CRIMPING TERMINALS (LUGS)

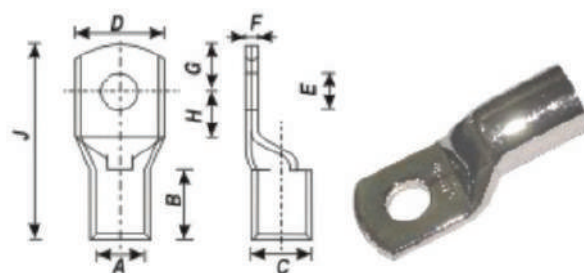

Size Sq.mm	Dimensions						Cat. Code
	E	A	C	D	B	J	
95	8.4	13.5	17.4	25	20	55	CDCL 95-8
	10.5	13.5	17.4	25	20	55	CDCL 95-10
	13.0	13.5	17.4	25	20	55	CDCL 95-12
	15.0	13.5	17.4	26	20	55	CDCL 95-14
	17.0	13.5	17.4	26	22	60	CDCL 95-16
	21.0	13.5	17.4	28	22	60	CDCL 95-20
120	8.4	15.0	19.4	28	22	64	CDCL 120-8
	10.5	15.0	19.4	28	22	64	CDCL 120-10
	13.0	15.0	19.4	28	22	64	CDCL 120-12
	15.0	15.0	19.4	28	22	64	CDCL 120-14
	17.0	15.0	19.4	28	22	64	CDCL 120-16
	21.0	15.0	19.4	28	22	64	CDCL 120-20
150	8.4	16.5	21.2	30	26	69	CDCL 150-8
	10.5	16.5	21.2	30	26	69	CDCL 150-10
	13.0	16.5	21.2	30	26	69	CDCL 150-12
	15.0	16.5	21.2	30	26	69	CDCL 150-14
	17.0	16.5	21.2	30	26	69	CDCL 150-16
	21.0	16.5	21.2	30	26	69	CDCL 150-20
185	10.5	18.5	23.5	34	32	78	CDCL 185-10
	12.7	18.5	23.5	34	32	78	CDCL 185-12
	15.0	18.5	23.5	34	32	78	CDCL 185-14
	17.0	18.5	23.5	34	32	78	CDCL 185-16
	21.0	18.5	23.5	34	32	78	CDCL 185-20
240	10.5	21	26.5	38	38	92	CDCL 240-10
	12.7	21	26.5	38	38	92	CDCL 240-12
	15.0	21	26.5	38	38	92	CDCL 240-14
	17.0	21	26.5	38	38	92	CDCL 240-16
	21.0	21	26.5	38	38	92	CDCL 240-20
300	10.5	23.5	30	43	42	101	CDCL 300-10
	12.7	23.5	30	43	42	101	CDCL 300-12
	15.0	23.5	30	43	42	101	CDCL 300-14
	17.0	23.5	30	43	42	101	CDCL 300-16
	21.0	23.5	30	43	42	101	CDCL 300-20
400	17.0	26.8	34.8	50	44	114	CDCL 400-16
	21.0	26.8	34.8	50	44	114	CDCL 400-20
500	17.0	30	39	56	48	117	CDCL 500-16
	21.0	30	39	56	48	124	CDCL 500-20
630	--	35	45	65	56	144	CDCL 630 BL
	17.0	35	45	65	56	144	CDCL 630-16
	21.0	35	45	65	56	144	CDCL 630-20
800	--	39	50.6	72.9	78	170	CDCL 800 BL
	21.0	39	50.6	72.9	78	170	CDCL 800-20
1000	--	43	56.2	80.8	90	200	CDCL 1000 BL
	21.0	43	56.2	80.8	90	200	CDCL 1000-20

IN LINE CONNECTORS - FERRULES

MATERIAL: E COPPER BS: 1977
SURFACE: TIN PLATED WITH OR
WITHOUT INSPECTION DIMPLE



STANDARD

Cable Size Sq. mm	A	C	J	Cat Code
1.5	1.8	3.7	12	CDCF - 1.5
2.5	2.4	4	15	CDCF - 2.5
4	3.1	4.8	15	CDCF - 4
6	.8	5.5	15	CDCF - 6
10	4.5	6.2	20	CDCF - 10
16	5.4	7.1	20	CDCF - 16
25	6.8	8.8	32	CDCF - 25
35	8.2	10.6	36	CDCF - 35
50	9.5	12.4	40	CDCF - 50
70	11.2	14.7	45	CDCF - 70
95	13.5	17.4	45	CDCF - 95
120	15	19.4	45	CDCF - 120
150	6.5	21.2	55	CDCF - 150
185	18.5	23.5	60	CDCF - 185
240	21	26.5	80	CDCF - 240
300	23.5	30	85	CDCF - 300
400	28.5	36.5	85	CDCF - 400
500	30	39	100	CDCF - 500
630	35	45	110	CDCF - 630
800	39	50.6	150	CDCF - 800
1000	43	56.2	170	CDCF - 1000

LONG

Cable Size Sq. mm	A	C	J	Cat Code
1.5	1.8	3.7	22	CDCF - 1.5
2.5	2.4	4	22	CDCF - 2.5
4	3.1	4.8	22	CDCF - 4
6	.8	5.5	22	CDCF - 6
10	4.5	6.2	22	CDCF - 10
16	5.4	7.1	44	CDCF - 16
25	6.8	8.8	47	CDCF - 25
35	8.2	10.6	47	CDCF - 35
50	9.5	12.4	47	CDCF - 50
70	11.2	14.7	50	CDCF - 70
95	13.5	17.4	54	CDCF - 95
120	15	19.4	65	CDCF - 120
150	6.5	21.2	65	CDCF - 150
185	18.5	23.5	65	CDCF - 185
240	21	26.5	89	CDCF - 240
300	23.5	30	89	CDCF - 300
400	28.5	36.5	90	CDCF - 400
500	30	39	115	CDCF - 500
630	35	45	115	CDCF - 630
800	39	50.6	230	CDCF - 800
1000	43	56.2	230	CDCF - 1000

SCREW CONNECTORS


MATERIAL: BRASS
SURFACE: ELECTRO TIN PLATED
SCREWS: ZINC PLATED STEEL



Cable mm²						Cat. Code.
	A	C	L	No. of Screws	Screw Size	
10	4.4	9	30	2	M4	CDSC 10
16	5.5	10	40	2	M4	CDSC 16
25	6.8	11	45	4	M5	CDSC 25
35	8.2	13	45	4	M5	CDSC 35
50	9.5	15	48	4	M6	CDSC 50
70	11.2	17	52	4	M6	CDSC 70
95	13.5	20	55	4	M8	CDSC 95
120	15	22	55	4	M8	CDSC 120
150	16.5	25	60	4	M10	CDSC 150
185	19	27	60	4	M10	CDSC 185
240	21	29	65	4	M10	CDSC 240
300	23.5	32	65	4	M10	CDSC 300

COPPER CRIMPING TERMINALS - N SERIES


MATERIAL: E COPPER
SURFACE: TIN PLATED WITH OR
WITHOUT INSPECTION HOLE

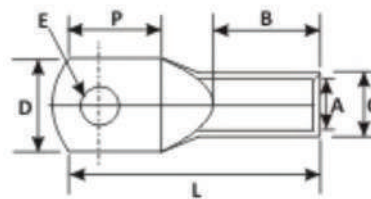

Cable mm²	Diameter E	Dimension in mm						Cat. No.
		A	C	D	P	B	L	
6	5.2	3.8	5.5	10	14	9	25	CD N 6 – 5
	6.2	3.8	5.5	10	14	9	28	CD N 6 – 6
10	5.2	4.5	6.2	11	15	9	28	CD N 10 – 5
	6.2	4.5	6.2	11	15	9	28	CD N 10 – 6
	10.5	4.5	6.2	16	25	12	43	CD N 16 – 8
16	6.2	5.5	7	12	16	12	36	CD N 16 – 6
	8.2	5.5	7	12	16	12	36	CD N 16 – 8
	10.5	5.5	7	16	24	12	43	CD N 16 – 10
	13	5.5	7	16	24	12	43	CD N 25 – 12
25	6.2	6.8	8.8	13	16	12	37	CD N 25 – 6
	8.2	6.8	8.8	13	16	12	37	CD N 25 – 8
	10.5	6.8	8.8	16	25	12	43	CD N 25 – 10
	13	6.8	8.8	18	25	12	43	CD N 25 – 12
35	6.2	8.2	10.6	15	20	18	43	CD N 35 – 6
	8.2	8.2	10.6	15	20	18	43	CD N 35 – 8
	10.5	8.2	10.6	15	20	18	43	CD N 35 – 10
	13	8.2	10.6	17	26	18	50	CD N 35 – 12
50	6.2	9.5	12.4	18	23	16	49	CD N 50 – 6
	8.2	9.5	12.4	18	23	16	49	CD N 50 – 8
	10.5	9.5	12.4	18	23	16	49	CD N 50 – 10
	13	9.5	12.4	18	23	16	49	CD N 50 – 12
70	8.2	11.2	14.7	21	25	20	55	CD N 70 – 8
	10.5	11.2	14.7	21	25	20	55	CD N 70 – 10
	13	11.2	14.7	21	25	20	55	CD N 70 – 12
	14	11.2	14.7	21	25	20	55	CD N 70 – 14
95	10.5	13.5	17.4	25	27	23	62	CD N 95 – 10
	13	13.5	17.4	25	27	23	62	CD N 95 – 12
	14	13.5	17.4	25	27	23	62	CD N 95 – 14
	17	13.5	17.4	25	33	23	68	CD N 95 – 16
120	10.5	15	19.4	28	28	28	72	CD N 120 – 10
	13	15	19.4	28	28	28	72	CD N 120 – 12
	14	15	19.4	28	28	28	72	CD N 120 – 14
	17	15	19.4	28	28	28	72	CD N 120 – 16
	21	15	19.4	28	33	28	77	CD N 120 – 20
150	10.5	16.5	21	30	32	30	75	CD N 150 – 10
	13	16.5	21	30	32	30	75	CD N 150 – 12
	17	16.5	21	30	32	30	75	CD N 150 – 16
	21	16.5	21	30	32	30	75	CD N 150 – 20
185	10.5	18.5	23.5	34	38	31	85	CD N 185 – 10
	13	18.5	23.5	34	38	31	85	CD N 185 – 12
	14	18.5	23.5	34	38	31	85	CD N 185 – 14
	17	18.5	23.5	34	38	31	85	CD N 185 – 16
	21	18.5	23.5	34	38	31	85	CD N 185 – 20
240	13	21	26.5	38	43	35	95	CD N 240 – 12
	17	21	26.5	38	43	35	95	CD N 240 – 16
	21	21	26.5	38	43	35	95	CD N 240 – 20
300	17	23.5	30	43	47	44	110	CD N 300 – 16
	21	23.5	30	43	47	44	110	CD N 300 – 20
400	17	26.5	36.5	52	48	40	112	CD N 400 – 16
	21	26.5	36.5	52	48	40	112	CD N 400 – 20
500	17	30	37	55	50	75	148	CD N 500 – 16
	21	30	37	55	50	75	148	CD N 500 – 20
630	17	34	41	60	50	70	148	CD N 630 – 16
	21	34	41	60	50	70	148	CD N 630 – 20


COPPER CRIMPING TERMINALS - DIN SERIES

DIN 46235
MATERIAL: E COPPER
SURFACE: TIN PLATED

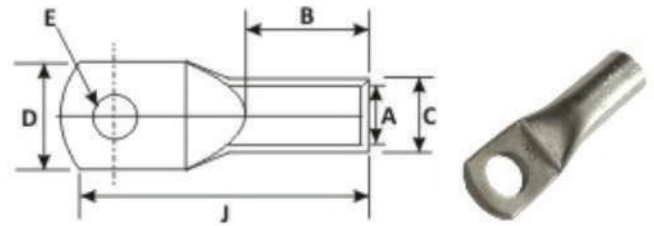

Cable mm ²	Stud Hole E	B	D	A	C	J	Cat. No.
6	M5	10	8.5	3.8	5.5	30.5	CD DIN 6-5
	M6	10	8.5	3.8	5.5	31.5	CD DIN 6-6
	M8	10	13	3.8	5.5	34	CD DIN 6-8
10	M5	10	9	4.5	6	34	CD DIN 10-5
	M6	10	9	4.5	6	34	CD DIN 10-6
	M8	10	13	4.5	6	37	CD DIN 10-8
16	M6	20	13	5.5	8.5	43.5	CD DIN 10-6
	M8	20	13	5.5	8.5	46	CD DIN 10-8
	M10	20	17	5.5	8.5	48	CD DIN 10-10
	M12	20	18	5.5	8.5	49	CD DIN 10-12
25	M6	20	14	7	10	45.5	CD DIN 25-6
	M8	20	16	7	10	48	CD DIN 25-8
	M10	20	17	7	10	50	CD DIN 25-10
	M12	20	19	7	10	51	CD DIN 25-12
35	M6	20	17	8.2	12.5	49.5	CD DIN 35-6
	M8	20	17	8.2	12.5	52	CD DIN 35-8
	M10	20	19	8.2	12.5	54	CD DIN 35-10
	M12	20	21	8.2	12.5	55	CD DIN 35-12
	M14	20	21	8.2	12.5	56.5	CD DIN 35-14
50	M8	28	20	10	14.5	62	CD DIN 50-8
	M10	28	22	10	14.5	64	CD DIN 50-10
	M12	28	24	10	14.5	65	CD DIN 50-12
	M14	28	24	10	14.5	66.5	CD DIN 50-14
	M16	28	28	10	14.5	68	CD DIN 50-16
70	M8	28	24	11.5	16.5	65	CD DIN 70-8
	M10	28	24	11.5	16.5	67	CD DIN 70-10
	M12	28	24	11.5	16.5	68	CD DIN 70-12
	M14	28	24	11.5	16.5	69.5	CD DIN 70-14
	M16	28	30	11.5	16.5	71	CD DIN 70-16
95	M8	35	28	13.5	19	77	CD DIN 95-8
	M10	35	28	13.5	19	77	CD DIN 95-10
	M12	35	28	13.5	19	78	CD DIN 95-12
	M14	35	28	13.5	19	79.5	CD DIN 95-14
	M16	35	32	13.5	19	81	CD DIN 95-16
120	M10	35	32	15.5	21	85	CD DIN 120-10
	M12	35	32	15.5	21	86	CD DIN 120-12
	M14	35	32	15.5	21	88	CD DIN 120-14
	M16	35	32	15.5	21	89	CD DIN 120-16
	M20	35	38	15.5	21	91	CD DIN 120-20
150	M10	35	34	17	23.5	93	CD DIN 150-10
	M12	35	34	17	23.5	94	CD DIN 150-12
	M14	35	34	17	23.5	97	CD DIN 150-14
	M16	35	34	17	23.5	97	CD DIN 150-16
	M20	35	40	17	23.5	99	CD DIN 150-20
185	M10	40	37	19	25.5	97	CD DIN 185-10
	M12	40	37	19	25.5	98	CD DIN 185-12
	M14	40	37	19	25.5	101	CD DIN 185-14
	M16	40	37	19	25.5	101	CD DIN 185-16
	M20	40	40	19	25.5	103	CD DIN 185-20


COPPER COMPRESSION TERMINALS - DIN SERIES

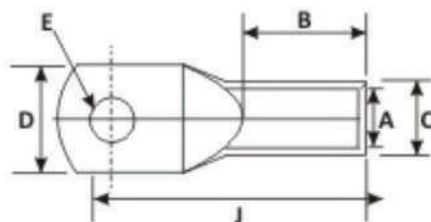

Cable mm ²	Stud Hole E	B	D	A	C	J	Cat. No.
240	M12	40	42	21.5	29	108	CD DIN 240-12
	M14	40	42	21.5	29	111	CD DIN 240-14
	M16	40	42	21.5	29	111	CD DIN 240-16
	M20	40	42	21.5	29	113	CD DIN 240-20
300	M14	50	48	24.5	32	119	CD DIN 300-14
	M16	50	48	24.5	32	119	CD DIN 300-16
	M20	50	48	24.5	32	122	CD DIN 300-20
400	M14	70	55	27.5	38.5	140	CD DIN 400-14
	M16	70	55	27.5	38.5	140	CD DIN 400-16
	M20	70	55	27.5	38.5	140	CD DIN 400-20
500	M16	70	60	31	42	150	CD DIN 500-16
	M20	70	60	31	42	150	CD DIN 500-20
625	M16	80	60	34.5	44	160	CD DIN 625- 16
	M20	80	60	34.5	44	160	CD DIN 625-20
800	M16	100	75	40	52	195	CD DIN 800-16
	M20	100	75	40	52	195	CD DIN 800-20
1000	M16	100	85	44	58	195	CD DIN 1000-16
	M20	100	85	44	58	195	CD DIN 1000-20

LONG BARREL TERMINALS


MATERIAL: E COPPER BS: 1977
SURFACE: TIN PLATED WITH OR
WITHOUT INSPECTION DIMPLE



Cable Sq. mm	A	C	D	B	F	P	J	Cat. No.
50	9.5	12.4	18	19	2.9	42	64	CDLB - 50
75	11.2	14.7	21	21	3.5	50	75	CDLB - 70
95	13.5	17.4	25	23	3.9	52	81	CDLB - 95
120	15	19.4	28	25	4.4	56	88	CDLB - 120
150	16.5	21.2	30	30	4.7	64	101	CDLB - 150
185	18.5	23.5	34	36	5	68	112	CDLB - 185
240	21	26.5	38	42	5.5	80	132	CDLB - 240
300	23.5	30	43	46	6.5	88	145	CDLB - 300
400	28.5	36.5	50	49	8	104	166	CDLB - 400
500	30	39	56	53	9	112	180	CDLB - 500
630	35	45	65	61	10	130	208	CDLB - 630

WIRE PIN TERMINALS


MATERIAL: E COPPER BS: 1977
SURFACE: TIN PLATED

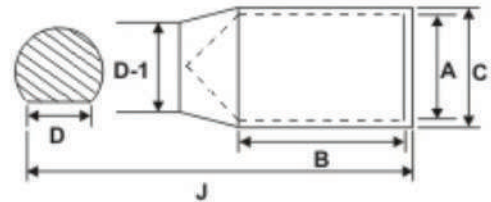

Cable mm ²	A	C	D	D-1	B	J	Cat. Code
2.5	2.5	4.7	4.5	4	6	20	CDWP 2.5A
	2.5	4.7	3.8	3.3	6	20	CDWP 2.5B
4	2.8	4.7	4.5	4	6	20	CDWP 4.0A
	2.8	4.7	3.8	3.3	6	20	CDWP 4.0B
6	3.1	4.7	4.5	4	6	20	CDWP 6.0A
	3.1	4.7	3.8	3.3	6	20	CDWP 6.0B
10	3.8	5.5	4.5	4	9	23	CDWP 10.0A
	3.8	5.5	3.8	3.3	9	23	CDWP 10.0B
	4.4	6.2	4.5	4	9	23	CDWP 10.0C
	4.4	6.2	3.8	3.3	9	23	CDWP 10.0D
16	5.3	7.1	6	5.5	12	32	CDWP 16.0A
	5.3	7.1	6	5.5	12	37	CDWP 16.0B
	5.5	7.1	3.8	3.3	12	30	CDWP 16.0C
25	7	9	6	5.5	12	32	CDWP 25.0A
	7	9	7.5	6.5	12	37	CDWP 25.0B
35	8	10	7.5	6.5	12	37	CDWP 35.0A
50	9.2	11.2	7.5	6.5	16	41	CDWP 50.0A
	10.4	14	14	13	18	49	CDWP 50.0B
70	11.5	13.8	7.5	6.5	18	43	CDWP 70.0A
	11.5	13.8	11.5	10.5	18	48	CDWP 70.0B
	11.5	13.8	11.5	10.5	18	55	CDWP 70.0C
95	12.8	15.6	11.5	10.5	20	51	CDWP 95.0A
	12.8	15.6	7.5	6.5	20	48	CDWP 95.0B
	12.8	15.6	12.8	11.8	20	58	CDWP 95.0C
120	14.8	17.8	7.5	6.5	22	50	CDWP 120.0A
	14.8	17.8	11.5	10.5	22	60	CDWP 120.0B
150	16	19.6	15.6	14	26	64	CDWP 150.0A
	16	19.6	11.5	10.5	26	64	CDWP 150.0B
185	18	22	15.6	14	32	70	CDWP 185.0A
	18	22	11.5	10.5	32	70	CDWP 185.0B
225	20	26	15.6	14	38	78	CDWP 225.0A
240	22	26	16	15	38	88	CDWP 240.0A
	22	26	16	14	38	78	CDWP 240.0B
300	24	28.7	16	15	42	92	CDWP 300.0A
	24	28.7	16	14	42	82	CDWP 300.0B
400	27	33.2	16	14	46	90	CDWP 400.0A

BI - METALLIC LUGS

RING TYPE

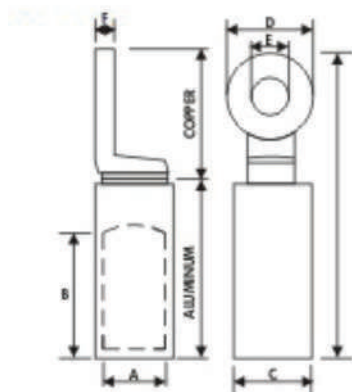

Conductivity

Aluminum Barrel: 61.8% IACS (Min)

Copper Palm: 99.7% IACS

Size mm ²	A	B	C	D	E	F	L	Cat. Code.
25	7.5	30	12	20	10.5	5	70	CD - 25 M10
35	8.5	30	12	20	10.5	5	75	CD - 35 M10
50	10.2	32	16	20	10.5	5	80	CD - 50 M10
50	10.2	32	16	25	13	5	85	CD - 50 M12
70	11.5	45	20	25	13	5	90	CD - 70 M12
95	13.5	50	22	25	13	5	95	CD - 95 M12
120	15.5	55	22	25	13	5	100	CD - 120 M12
150	16.5	60	25	25	13	5	105	CD - 150 M12
185	18	60	30	36	13	7	130	CD - 185 M12
185	18	60	30	30	13	6	130	CD - 185 M12
240	22	65	32	36	13	7	135	CD - 240 M12
240	22	65	32	30	13	6	135	CD - 240 M12
240	22	65	32	50x50	10.5x	7.5	160	CD - 240 M14
300	23.5	70	35	36	14	7	140	CD - 300 M12
300	23.5	70	35	36	13	7	140	CD - 300 M16
400	26.5	75	35	36	17	7	145	CD - 400 M12
400	26.5	75	35	36	13	7	145	CD - 400 M16
500	30	95	47	60x60	17	10	200	CD - 500 B
630	34	95	54	60x60	-	10	200	CD - 630 B
800	39	115	54	60x60	-	10	220	CD - 800 B
1000	42	126	60	80x80	-	10	256	CD - 1000 B
1300	46.5	136	65	80x80	-	10	267	CD - 1300 B


- Blank Terminal Palms are available on request.
- Other Shapes (Square Type, Pin Type, Square with 4 Holes, Extended Palm, Center Palm), sizes, diamensions can be manufactured as per the drawing from customer.
- Reverse Bi-Metallic Lugs (Copper Barrel, Aluminum Palm) can be manufactured on the customer's request.
- Bi-Metallic Reducers and Connectors are also available.

PRE - INSULATED TERMINALS


FORK TYPE



Cable Size mm ²	E	A	B	D	J	Cat. Code.
1.5	3	1.6	5	6.2	18	CD PIF 1.5 - 3
1.5	3.5	1.6	5	6.8	18	CD PIF 1.5 - 3.5
1.5	5	1.6	5	8	26	CD PIF 1.5 - 5
2.5	3.5	2.3	5	6.5	20	CD PIF 2.5 - 3.5
2.5	5	2.6	6.2	10.5	25	CD PIF 2.5 - 5
4 - 6	3.2	3.5	6	6	23	CD PIF 4 - 3
4 - 6	3.5	3.5	6	6	23	CD PIF 4 - 3.5
10	6.5	4.5	8	16	35	CD PIF 10 - 6
10	8.2	4.5	8	16	35	CD PIF 10 - 8




PIN TYPE



Cable Size mm ²	Type	A	B	L	D	J	Cat. Code.
1.5	PIN	1.6	5	10	1.9	22	CD PIP 1.5P
2.5	PIN	2.3	5	10	1.1	22	CD PIP 2.5P
2.5	BLADE	2.3	5	10	3.1	22	CD PIP 2.5B
4	PIN	2.9	6	10	2.7	28	CD PIP 4P
4	BLADE	3.6	6	10	5.1	28	CD PIP 4B
6	PIN	3.6	6	10	2.7	28	CD PIP 6P
10	PIN	4.5	8	12	4.3	30	CD PIP 10P
16	PIN	5.8	10	13	5.5	36	CD PIP 16P

Cable Size mm ²	E	A	B	D	J	Cat. Code.
1.5	2.2	1.6	5	6	19	CD PIR 1.5 - 2
1.5	3.2	1.6	5	6	19	CD PIR 1.5 - 3
1.5	3.7	1.6	5	6	19	CD PIR 1.5 - 3.5
1.5	4.2	1.6	5	10	23	CD PIR 1.5 - 4
1.5	5.2	1.6	5	10	23	CD PIR 1.5 - 5
1.5	6.4	1.6	5	10	23	CD PIR 1.5 - 6
2.5	3.2	2.3	5	6.5	18	CD PIR 2.5 - 3
2.5	3.7	2.3	5	8	21	CD PIR 2.5 - 3.5
2.5	4.2	2.3	5	8	21	CD PIR 2.5 - 4
2.5	5.2	2.3	5	10	23	CD PIR 2.5 - 5
2.5	6.4	2.3	5	10	23	CD PIR 2.5 - 6
2.5	8.2	2.3	5	12	27	CD PIR 2.5 - 8
2.5	10.2	2.3	5	18	34	CD PIR 2.5 - 10
4 - 6	4.2	3.5	6	10	28	CD PIR 4 - 4
4 - 6	5.2	3.5	6	10	28	CD PIR 4 - 5
4 - 6	6.4	3.5	6	12	31	CD PIR 4 - 6
4 - 6	8.2	3.5	6	14	33.5	CD PIR 4 - 8
4 - 6	10.2	3.5	6	18	38	CD PIR 4 - 10
10	4.2	4.3	8	10	32	CD PIR 10 - 4
10	5.2	4.3	8	10	32	CD PIR 10 - 5
10	6.4	4.3	8	12	34	CD PIR 10 - 6
10	8.2	4.3	8	16	38	CD PIR 10 - 8
10	10.2	4.3	8	32	45	CD PIR 10 - 10

RING TYPE

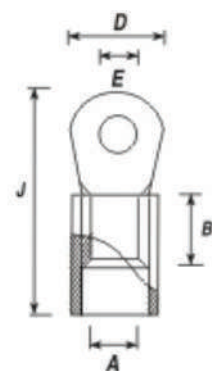

SPLIT BOLT CONNECTORS

MATERIAL: EXTRUDED / FORGED BRASS BS: 2874
EC GRADE COPPER
FINISH: TIN PLATED / UNTINNED

Conductor mm ²	Gap for the Cable A
10	4.5
16	6
25	6 - 9
32 - 35	8 - 1
50	9 - 7
70	11 - 2
95	13 - 6
100	14
120	15
150	16 - 6
185	18 - 2
240	21 - 4
300	23 - 7
400	26 - 2
500	30 - 1



'C' TYPE CONNECTORS

MATERIAL: EXTRUDED / FORGED BRASS BS: 2874
EC GRADE COPPER
FINISH: TIN PLATED / UNTINNED



Conductor mm ²	Dimension in mm			Cat. Code.
	A	B	L	
C25 - C35	21.4	13	17	CD CC 25-35
C35 - C16	24.6	15.4	21	CD CC 35-16
C35 - C35	36.6	15.6	21	CD CC 35-35
C70 - C25	26.4	17.5	21	CD CC 70-25
C50 - C25	32.9	21	25	CD CC 50-25
C50 - C50	38	21	26	CD CC 50-50
C70 - C35	33	21	28	CD CC 70-35
C70 - C70	34	21	28	CD CC 70-70
C95 - C35	40.6	26	29	CD CC 95-35
C95 - C70	41	26	29	CD CC 95-70
C95 - C95	41	26	29	CD CC 95-95

ALUMINUM CABLE TERMINALS

MATERIAL: ELCTROLYTIC GRADEL AL 99.5
FINISH: BRIGHT / ELECTRO TINNED
FEATURES: BARREL PREFILLED WITH OXIDE
INHIBITING COMPOUND & CAPPED
AT THE END



mm ²	Cable Size	Dimension in mm										Cat. Code.
		E	A	C	D	F	B	K	H	G	J	
2.5	1/1.8	5.2	2.0	3.7	9	1.0	7	3	5	5	20	CD ALL 2.5-5
4	1/2.8	6.5	3.1	4.8	11	1.0	7	3	6	6	22	CD ALL 4-6
6	1/3.55	6.5	3.8	5.5	11	1.0	9	3	6	6	24	CD ALL 6-6
10	7/1.4	6.5	4.4	6.2	11	1.3	9	3	6	6	24	CD ALL 10-6
16	7/1.7	6.5	5.3	7.1	11	1.6	12	4	8	6	30	CD ALL 16-6
25	7/2.24	6.5	7.0	9.0	13	2.0	12	5	12	8	37	CD ALL 25-6
35	7/2.5	6.5	8.0	10.0	15	2.0	12	5	12	8	37	CD ALL 35-6
	7/2.5	8.2	8.0	10.0	15	2.0	12	5	12	8	37	CD ALL 35-8
50	19/1.8	6.5	9.2	11.2	16	2.0	16	8	12	9	45	CD ALL 50-6
	19/1.8	8.2	9.2	11.2	16	2.0	16	8	12	9	45	CD ALL 50-8
	19/1.8	10.2	9.2	11.2	16	2.0	16	8	12	9	45	CD ALL 50-10
70	19/2.24	8.2	11.5	13.8	20	2.3	18	10	15	13	56	CD ALL 70-8
	19/2.24	10.2	11.5	13.8	20	2.3	18	10	15	13	56	CD ALL 70-10
	19/2.4	12.2	11.5	13.8	20	2.3	18	10	15	13	56	CD ALL 70-12
95	19/2.5	10.2	12.8	15.6	23	2.8	20	10	15	13	58	CD ALL 95-10
	19/2.5	12.2	12.8	15.6	23	2.8	20	10	15	13	58	CD ALL 95-12
120	37/2.06	10.2	14.8	17.8	26	3.0	22	10	16	14	62	CD ALL 120-10
	37/2.06	12.2	14.8	17.8	26	3.0	22	10	16	14	62	CD ALL 120-12
	37/2.06	16.2	14.8	17.8	26	3.0	22	10	16	14	62	CD ALL 120-16
150	37/2.24	10.2	16.0	19.6	28	3.6	26	11	18	15	70	CD ALL 150-10
	37/2.24	12.2	16.0	19.6	28	3.6	26	11	18	15	70	CD ALL 150-12
	37/2.24	16.2	16.0	19.6	28	3.6	26	11	18	15	70	CD ALL 150-16
185	37/2.5	12.2	18.0	22.0	32	4.0	28	13	21	21	83	CD ALL 185-12
	37/2.5	16.2	18.0	22.0	32	4.0	28	13	21	21	83	CD ALL 185-12
225	37/2.8	16.2	20.0	24.0	35	4.0	32	15	24	24	95	CD ALL 225-16
240	61/2.24	16.2	22.0	26.0	38	4.0	31	15	24	24	97	CD ALL 240-16
	61/2.24	20.3	22.0	26.0	38	4.0	34	15	24	24	97	CD ALL 240-20
300	61/2.5	16.2	24.0	28.7	42	4.7	36	16	25	25	103	CD ALL 300-16
	61/2.5	20.3	24.0	28.7	42	4.7	36	16	25	25	103	CD ALL 300-20
400	61/3.0	20.3	28.0	33.2	49	5.2	44	18	27	27	116	CD ALL 400-20
500	91/2.65	20.3	30.0	36.0	53	6.0	48	19	27	27	120	CD ALL 500-20
630	91/3.0	20.3	35.0	41.5	61	6.5	53	20	33	31	137	CD ALL 630-20
800	91/3.5	BL	39.0	46.3	67	7.3	68	25	38	37	165	CD ALL 800BL
1000	91/3.75	BL	43.0	53.8	76	10.8	90	30	45	45	210	CD ALL 1000BL

ALUMINUM CONNECTORS


MATERIAL: ELCTROLYTIC GRADE AL 99.5
FINISH: BRIGHT/ ELECTRO TINNED
APPLICATION: UPTO 36KVA
FEATURES: BARREL FILLED WITH OXIDE
INHIBITING COMPOUND & CAPPED
AT THE END



AREA mm ²	Cable Size	Diamension in mm			Cat. Code.
		A	C	J	
2.5	1/1.8	2.0	5.5	16	CD ALF 2.5
6	3/1.06	2.6	5.5	16	CD ALF 4
6	7/1.12	3.5	5.5	16	CD ALF6
10	7/1.4	4.4	7.4	20	CD ALF 10
16	7/1.7	5.4	8.3	26	CD ALF 16
25	7/2.4	7.0	9.7	35	CD ALF 25
35	7/2.5	8.0	10.8	40	CD ALF 35
50	19/1.8	9.3	13.0	45	CD ALF 50
70	19/2.24	11.6	16	55	CD ALF 70
95	19/2.5	12.9	17.1	60	CD ALF 95
120	37/2.06	15	19.6	65	CD ALF 120
150	37/2.24	16.5	21.2	70	CD ALF 150
185	37/2.5	18.5	24	75	CD ALF 185
225	37/2.8	21	27	85	CD ALF 225
240	37/3.0	22	28.6	90	CD ALF 240
300	61/2.5	25	32	100	CD ALF 300
400	61/3.0	29	37.5	115	CD ALF 400
500	91/2.65	31	41	125	CD ALF 500
630	91/3.0	36	46	140	CD ALF 630
800	91/3.35	39	51	160	CD ALF 800
1000	91/3.75	43.5	57	210	CD ALF 1000

MECHANICAL CABLE LUGS

MATERIAL: EC GRADE COPPER / ALUMINUM
FINISH: ELECTRO TINNED
BOLTED WITH 2 SCREWS & 4 SCREWS


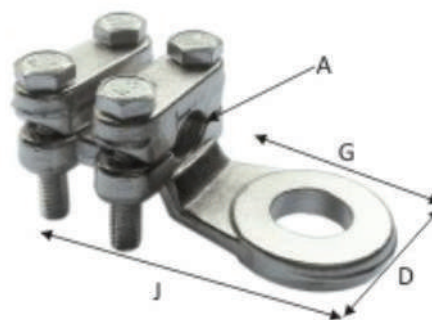


Cable mm ²	Dimension in mm						Cat. Code.
	A	G	D	J	Screw	Type	
10	4	6	15	32.5	M - 5	I	CD MECL 10
16	5.1	8.5	17	37	M - 5	I	CD MECL 16
25	6.3	8.5	18.75	42	M - 5	I	CD MECL 25
35	7.5	10.5	21.5	4	M - 5	I	CD MECL 35
50	9.5	10.5	23	56.5	M - 6	II	CD MECL 50
75	11	13.25	26	61	M - 6	II	CD MECL 75
100	13	14.3	29	65	M - 6	II	CD MECL 100
120	14	14.8	32	71	M - 6	II	CD MECL 120
170	16	16	33	81	M - 8	II	CD MECL 170
200	17	17	35	85	M - 8	II	CD MECL 200
250	18	17	38	87.5	M - 8	II	CD MECL 250
300	21	19.8	45	118	M - 10	II	CD MECL 300
400 / 500	25.5	22	53	132	M - 10	II	CD MECL 400 / 500
700	34	22	60	150	M - 10	II	CD MECL 700

BW BRASS CABLE GLANDS

MATERIAL: BRASS
SPECIFICATION: BS 6121 PART 1
FINISH: PLAIN BRASS OR NICKEL PLATED
CABLE TYPE: STEEL WIRE ARMOUR

BW GLANDS KIT AVAILABLE C/W
EARTH TAG, PVC SHROUD & LOCK

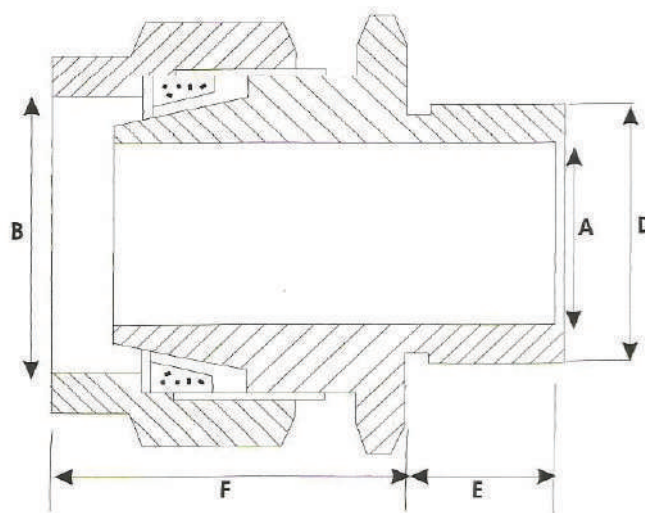

Cat. Code.	Cable Dimensions Accommodate			Gland Dimensions				
	Under Armour Dia A Max. mm	Overall Dia B Max. mm	Armour wire Dia C mm	ISO Entry Thread		Approx length from Shoulder	Across Flat	Across Corners
				Dia	Length			
				Dmm	Emm	Fmm	Gmm	Hmm
CD BW 20 S	12.30	17.00	0.90/1.25	20	10	23.00	23.00	24.00
CD BW 20	14.30	20.00	0.90/1.25	20	10	30.00	25.00	27.00
CD BW25 S	18.00	23.80	1.25/1.60	25	10	30.00	31.00	32.50
CD BW 25	20.40	27.00	1.25/1.60	25	10	32.00	30.00	38.50
CD BW 32	26.50	33.00	1.60/2.00	32	10	36.00	41.50	45.50
CD BW 40 S	31.00	37.00	1.60/2.00	40	10	36.00	45.00	50.00
CD BW 40	32.50	43.00	1.60/2.00	40	15	40.00	49.00	54.00
CD BW 50 S	37.80	48.00	2.00/2.50	50	15	40.00	58.00	65.00
CD BW 50	44.00	53.00	2.00/2.50	50	15	45.00	62.30	69.50
CD BW 63 S	50.50	60.50	2.50	63	15	45.00	70.00	77.00
CD BW 63	56.50	65.50	2.50	63	15	50.00	76.30	85.00
CD BW 75 S	62.50	72.00	2.50	75	15	50.00	85.00	95.00
CD BW 75	67.50	78.0	2.50/3.15	75	15	75.00	90.50	99.00
CD BW 90	80.00	93.00	3.15	90	20	75.00	112.00	125.00

CW BRASS CABLE GLANDS



MATERIAL: BRASS

SPECIFICATION: BS 6121 PART 1

FINISH: PLAIN BRASS OR NICKEL PLATED

CABLE TYPE: STEEL WIRE ARMOUR

CW GLANDS KIT AVAILABLE C/W
EARTH TAG, PVC SHROUD & LOCK

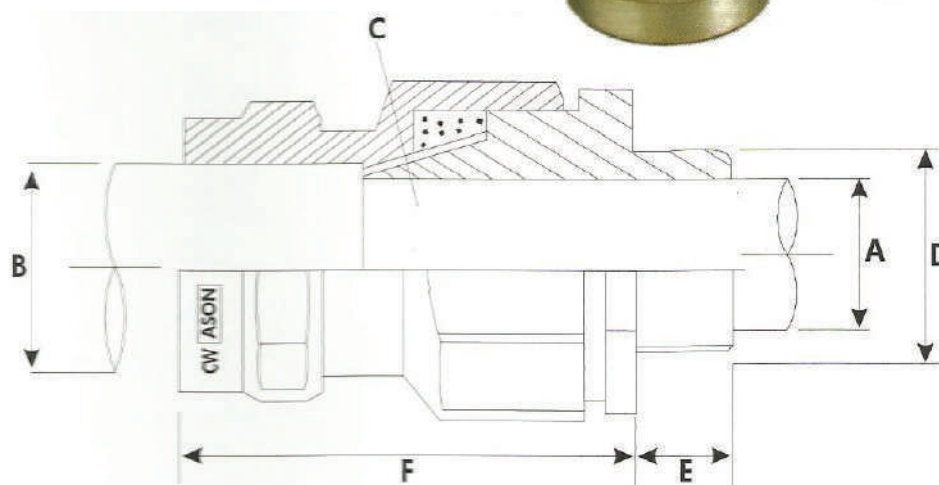

Cat. Code.	Cable Dimensions Accommodate(mm)			Gland Dimensions(mm)				
	Under Armour A Max	Overall B Max	Armour wire Dia C	ISO Entry Thread		Approx length from Shoulder	Hexagon Size	
				D	E		A/F(G)	A/C(H)
CD CW 20 S	12.5	17	0.9	20	10	47	22	29
CD CW 20 L	14.4	20.5	0.90/1.25	20	10	47	26	29
CD CW 25 S	17.8	23.8	0.90/1.25	25	10	50	31	34
CD CW 25 L	20.4	27	1.25/1.60	25	10	50	34	38.5
CD CW 32	26.5	33	1.25/1.60	32	10	55	41.5	46.5
CD CW 40 S	31	37	1.60/2.00	40	10	60	45	50
CD CW 40 L	32.5	40.8	1.60/2.00	40	15	60	49	54
CD CW 50 S	37.8	45	2.00/2.50	50	15	65	51	64
CD CW 50 L	44	51.5	2.00/2.5	50	15	65	62.3	69.5
CD CW 63 S	50.5	60.5	2.5	63	15	70	70	78
CD CW 63 L	56.5	65.5	2.5	63	15	70	76.3	85
CD CW 75 S	62.5	72	2.5	75	15	75	85	95
CD CW 75 L	67.5	78.5	2.50/3.15	75	15	75	91	112
CD CW 90 S	80	90	3.15	90	20	90	103	115

A1A2 BRASS CABLE GLANDS



MATERIAL: BRASS

SPECIFICATION: BS 6121 PART 1

FINISH: PLAIN BRASS OR NICKEL PLATED

CABLE TYPE: STEEL WIRE ARMOUR

A1A2 GLANDS KIT AVAILABLE C/W
EARTH TAG, PVC SHROUD & LOCK

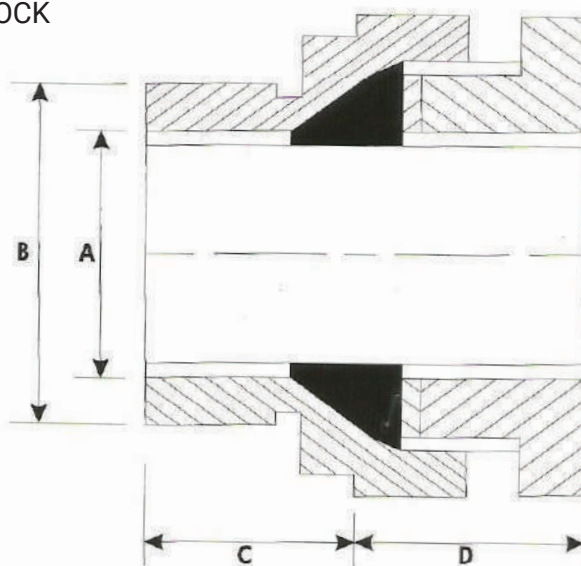

Cat. Code.	Cable Dimensions Accommodate		Gland Dimensions(mm)				
	Overall Diameter A		ISO Entry Thread		Approx length from Shoulder	Hexagon Size	
			Dia	Length		Across Flat	Across Corners
		Min mm	Min mm	D mm	E mm	F mm	G mm
CD A2 20 S	8.00	11.50	20	10	22.00	22.00	25.00
CD A2 20	11.00	14.00	20	10	22.00	22.00	25.00
CD A2 25 S	14.00	17.50	20	10	25.00	30.00	34.00
CD A2 25	17.50	20.40	25	10	26.00	30.00	34.00
CD A2 32	20.00	26.00	32	10	30.00	36.00	40.00
CD A2 40 S	26.00	30.00	40	10	31.00	46.00	52.00
CD A2 40	30.00	33.00	40	15	31.00	46.00	52.00
CD A2 50 S	33.00	38.00	50	15	33.00	55.00	61.00
CD A2 50	38.00	44.00	50	15	33.00	56.00	62.00
CD A2 63 S	44.00	50.50	63	15	35.00	70.00	77.50
CD A2 63	50.00	56.00	63	15	35.00	70.00	77.50
CD A2 75 S	56.50	62.00	75	15	35.00	80.00	89.00
CD A2 75	62.00	68.00	75	15	40.00	80.00	89.00
CD A2 90	68.00	78.00	90	20	45.00	100.00	112.00

DOUBLE COMPRESSION CABLE GLANDS(E1W)



MATERIAL: BRASS

SPECIFICATION: BS 6121 PART 1

FINISH: PLAIN BRASS OR NICKEL PLATED

CABLE TYPE: STEEL WIRE ARMOUR

E1W GLANDS KIT AVAILABLE C/W
EARTH TAG, PVC SHROUD & LOCK

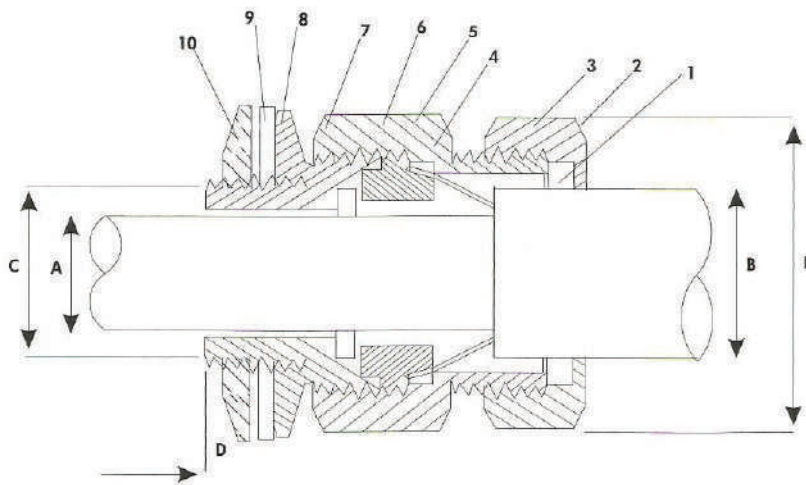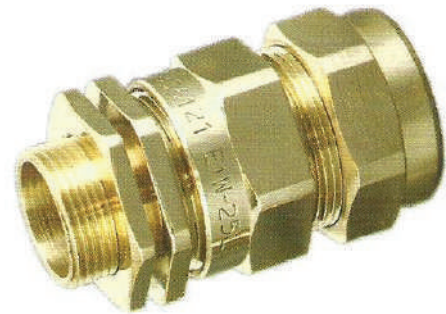

Parts:

1. Skid Washer
2. Outer Seal
3. Sealing Nut
4. Brass Body
5. Clamping Ring
6. Armour Clamp
7. Inner Seal
8. Gland Barrel
9. Flat Washer
10. Check Nut

Cat. Code.	B	A	C	Nipple BSC (Inch)	E	D	Max. Accept. Dia.	
							From	To
CD E1W 3/8"	13	11	21	24	5/8"	25	8	13
CD E1W 1/2"	14	11	21	24	5/8"	25	10	14
CD E1W 5/8"	15	13	23	26	3/4"	22	11	15
CD E1W 001	17	13	25	29	3/4"	15	12.5	16.5
CD E1W 01	18.5	13	27.8	31.8	3/4"	15	13.5	18.8
CD E1W 01L	18.5	15	27.8	31.8	1"	15	13.5	18.5
CD E1W 02	20.5	15	32	36.5	1"	15	18.5	20
CD E1W 02S	20.5	13	32	36.5	3/4"	15	18.5	20
CD E1W 03	23	17	32	36.5	1"	15	20.5	23
CD E1W 04	27	20.5	38.5	44	1"	15	23.5	26.5
CD E1W 04S	27	24	38.5	44	1 1/4"	15	23.5	26.5
CD E1W 05	30.5	24	43	48.5	1 1/4"	15	27	30
CD E1W 06	33.5	28	48	53	1 1/2"	20	30.5	33.5
CD E1W 06S	33.5	24	48	53	1 1/4"	20	30.5	33.5
CD E1W 07	37.5	31	52	58	1 1/2"	20	34	37
CD E1W 08	42	35	56	64	2"	20	37.5	41
CD E1W 09	47	39.5	59	67	2"	20	41.5	46
CD E1W 10	53	44.5	67.5	77	2"	20	46.5	52
CD E1W 11	61	55	80	92	2 1/2"	25	52.5	60
CD E1W 12	68	63	85	98	3"	25	60.5	67
CD E1W 13	79	74	90	113	3 1/4"	25	67.5	78
CD E1W 14	84	78	108	122	3 1/4"	25	78.5	83
CD E1W 15	94	88	117	131	4"	25	84	93
CD E1W 16	103	96	127	148	4 1/2"	25	93	102


SINGLE COMPRESSION CABLE GLANDS

MATERIAL: BRASS

SPECIFICATION: BS 6121 PART 1

FINISH: PLAIN BRASS OR NICKEL PLATED

CABLE TYPE: STEEL WIRE ARMOUR

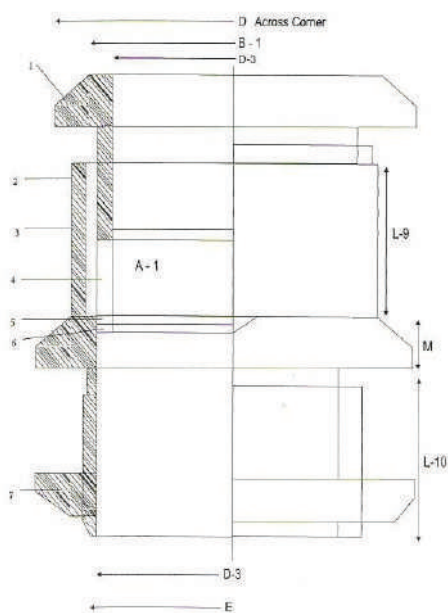


Parts:

1. Compression Nut
2. Brass Body
3. Metal Washer
4. Rubber Ring
5. Metal Washer
6. Metal Washer
7. Check Nut

Cat. Code.	E	D3	D3A	D	L9	L10	M	Rubber Ref.	A1	B1	C1
CD SIBG-1216	12	16	12	25.5	15	9	3	R 1212	12	18	8
CD SIBG-1616	16	19	12	29.5	15	9.5	3.5	R 1611	11	20.5	9
CD SIBG-1619	19	19	15	29.5	15	9.5	3.5	R 1613	13	20.5	9
								R 1615	15	20.5	9
CD SIBG-2119	19	24	15	36.5	18	9.5	3.5	R 2116	16	26	11
CD SIBG-2125	25.4	24	21	36.5	18	9.5	3.5	R 2118	18	26	11
								R 2120	20	26	11
CD SIBG-2925	25.4	33	21	47	21	10	4	R 2921	21	35	12
CD SIBG-2932	32	33	27	47	21	10	4	R 2923	23	35	12
CD SIBG-2938	38	33	32	47	21	10	4	R 2925	25	35	12
								R 2927	27	35	12
								R 2929	29	35	12
CD SIBG-3632	32	41	26	59	22.5	11	4.5	R 3631	31	45	14
CD SIBG-3638	38	41	32	59	22.5	11	4.5	R 3633	33	45	14
								R 3635	35	45	14
								R 3637	37	45	14
CD SIBG-4238	38	47	32	71	26	12	5.5	R 4236	36	52	17
CD SIBG-4251	51	47	44.5	71	26	12	5.5	R 4238	38	52	17
								R 4240	40	52	17
								R 4242	42	52	17

ALCO GLANDS

MATERIAL: BRASS
SPECIFICATION: BS 6121 PART 1
FINISH: PLAIN BRASS OR NICKEL PLATED
CABLE TYPE: STEEL WIRE ARMOUR

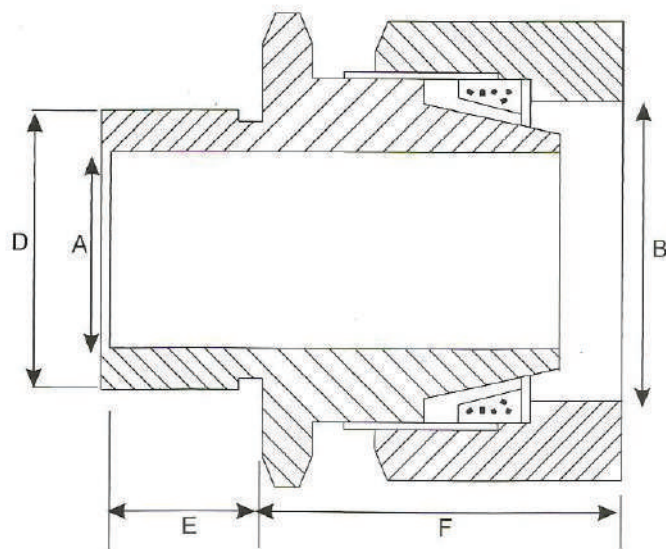

Size	Cable Dimensions Accommodated			Gland Dimension				
Cat. Code.	Under Armour Dia. A Max. mm	Overall Dia. B Max. mm	Armour wire Diameter	ISO Entry Thread Dia. Length		Approx length from Shoulder F mm	Hexagon Size	
			C mm	D mm	E mm		Across Flat G mm	Across Corners H mm
CD 204	15.8	15.8	0.90/1.25	20	10	24	22.00	24.9
CD 206	21.0	21.0	0.90/1.25	20	10	25	27.00	30.0
CD 254	23.8	23.8	1.25/1.60	25	10	26	31.7	35.7
CD 256	27.2	27.2	1.25/1.60	25	10	28	37.6	42.2
CD 323	33.2	33.2	1.60/2.00	32	10	25	47.3	53.6
CD 326	39.2	39.2	1.60/2.00	40	15	25	48.4	54.6
CD 405	39.9	39.9	1.60/2.00	40	15	36	50.0	57.0
CD 503	51.6	51.6	2.00/2.50	50	15	36	58.0	64.2
CD 505	52.6	52.6	2.00/2.50	50	15	30	65.0	71.2
CD 606	61.0	61.0	2.5	63	15	40	71.0	77.5
CD 753	71.3	71.3	2.50	75	15	40	85.0	95.5
CD 755	78.0	78.0	2.50	75	15	40	98.0	109.2

CABLOND CABLE GLAND KITS

Some of the 'CablonD' cable glands such as BW, CW, E1W and A1A2 are also supplied in kits with brass earth tags and pvc shrouds to enhance the functionality of the cable glands.

EARTH TAGS



Brass earth tags are provided at the customer's request with the cable glands. These ensure metal to metal contact between glands and the enclosure essential for electrical continuity.

PVC SHROUDS



PVC Shrouds are fitted over glands to provide additional protections against weather conditions and corrosion. PVC Shrouds also enhance the IP rating of a termination.

We also supply LSF Shrouds for protection against smoke and fire.

LOCKNUTS



Locknuts are available in brass, aluminum as well as galvanized steel. They are used to fasten glands to the gland plate. These can be supplied in sizes 16mm to 75mm.



CABLOND

CABLE TERMINATIONS

Product Range

- Cable Glanding
- Cable Termination
- Galvanized Flexible Conduits & Accessories

Authorized Distributors

Group FNT

Abu Dhabi, United Arab Emirates
www.groupfnt.com
email : info@groupfnt.com

Tradesphere Equipment Trading

Abu Dhabi, United Arab Emirates
www.tradesphereuae.com
email : sales@tradesphereuae.com

CABLOND is a FNT brand, which is a government-recognized Indian export house. It was set up with the intention of marketing its indigenous Copper Cable Terminal Lugs and Cable Glands under a distinct identity. The brand exclusively caters to overseas markets with emphasis on international quality standards.

With focus strongly centered around Economy and Quality, CABLOND continuously updates its technology in order to stay industry leaders. The company's wide-ranging customer base led to a versatile factory with the capability to produce different client specifications.