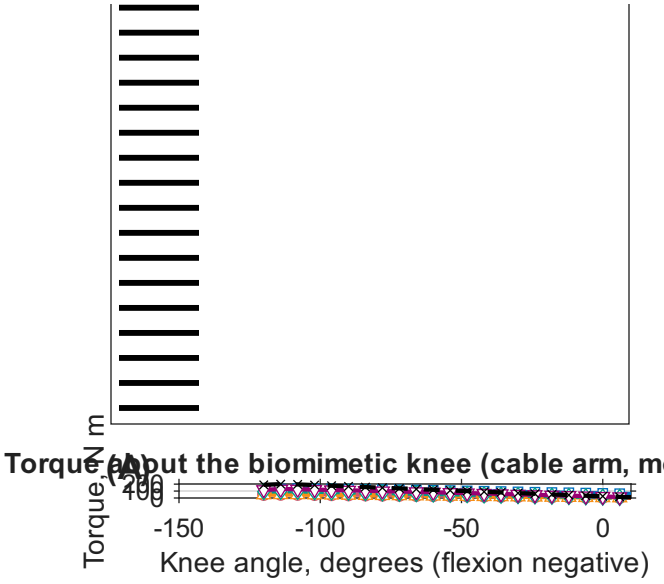
Torque about the biomimetic knee (cable arm, moving IC
Torque, N m
400
200
0
-150
-100
-50
0
Knee angle, degrees (flexion negative)

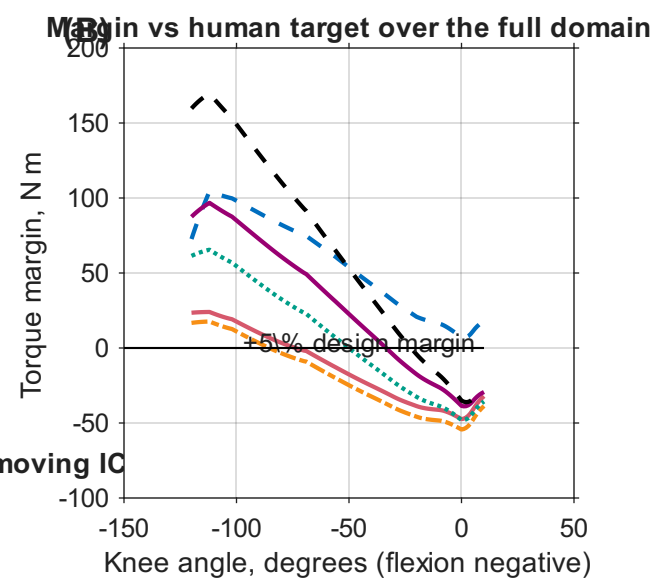
Margin vs human target over the full domain
Torque margin, N m
200
150
100
50
0
-50
-100
+5% design margin
-150
-100
-50
0
50
Knee angle, degrees (flexion negative)