
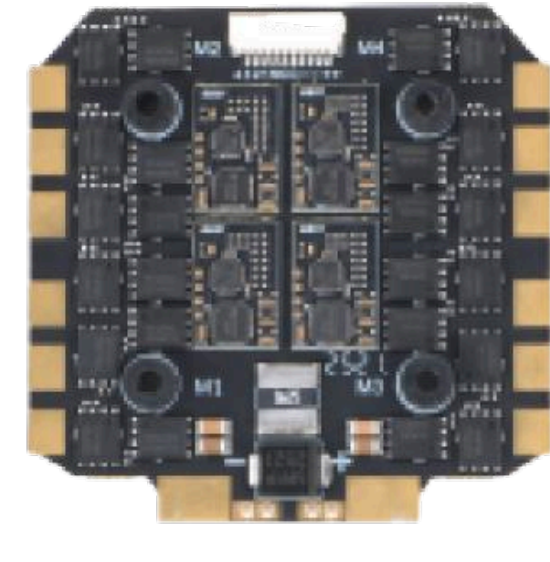
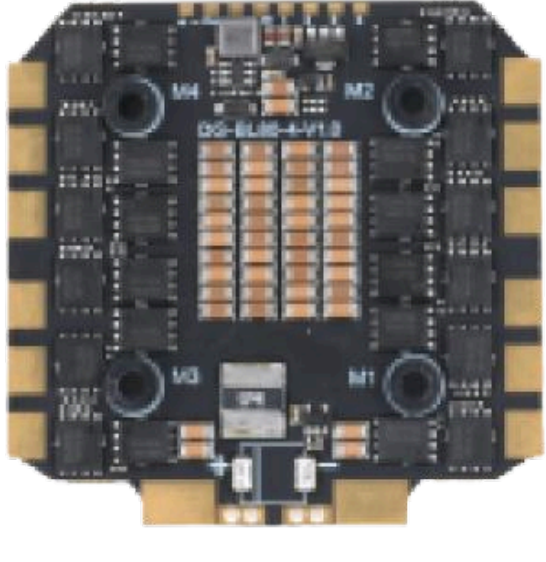


# F722 FC

FG Firmware	BETAFLIGHT
Firmware Name	BF F722
Firmware Version	4.5.2 BTFL
Main Control MCU	STM32F722
Gyro	ICM42688-P
Barometer	SPL06-001
OSD MCU	AT7456E
Black Box	16MB
Motor Output	8ch
Servo Output	Support X 8
LEO	Support X 1
Buzzer	Support
Receiver Protocol	ELRS/CRSF/S.BUS/Frsky/ Futabafysky/TBS Crossfre/ DSMX
Genoral Serial Por	6ch
Output Power Supply	4 5V/O 5A 5V/3A 12V/3A
USB	TyPe-C
Digital Sky Termin	Support DJI/Vista/Walk Snail
Direct	Receiver4P
Insertiono	Simulated Camera3P Simulation Image Transmission 4P Digital Video Transmission6P Brushless ESC8PX2 GPS6P
Weight	9g
Limensions Of The Shape	39.4mmx 39.4mm
Installation Holes	30.5mmx 30.50/M4

# F80 ESC

Power Supplycontrol Firmware	BLHeli S\BLUEjay
MCU	EFM8BB51F16G-C
MOS FETS	NTMFS5C430NLTIG-01
Continuous Maximum Current	80Ax4
Peak Maximum Curren	80AX4-10s
TVS	Have
Electrolytic Capacitor	50v1000uf Low ESR Capacitor X 2
Motor Protocol	Dshot300/Dshot600/ PWM/Bi-Directional Dshot
Battery Input	3-8 LIPO
Ammeter	Support
Power Output	VBAT
Weight	35.7g
Dimensions Of The Shape	58.369mmx57.4mm
Installation Holes	30.5mmx 30.50/M4
Working Temperature	20'c-80c
Storage Temperature	20'c-70'CC
Work Humidity	20-95%

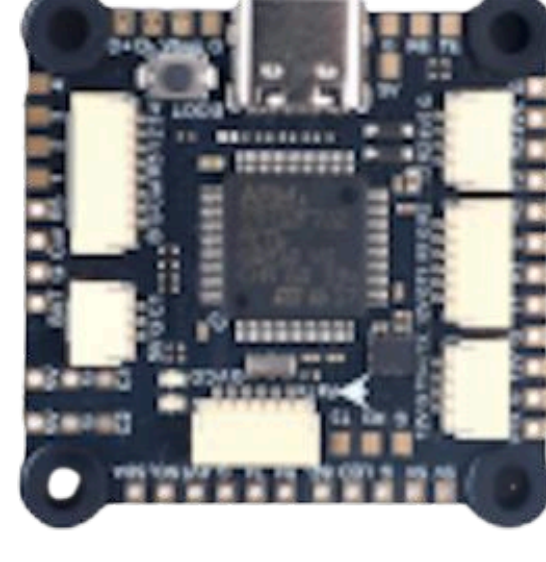

# F722 FC

飞控固件	BETAFLIGHT
固件名称	BF F722
固件版本	4.5.2 BTFL
主控MCU	STM32F722
陀螺仪Gyro	ICM42688-P
气压计	SPL06-001
OSD MCU	AT7456E
黑匣子	16MB
电机输出	8ch
舵机输出	支持 X 8
LED	支持 X 1
峰鸣器	支持
接收机协议	ELRS/CRSF/S.BUS/Frsky/ Futabafysky/TBS Crossfre/ DSMX
通用串口	6ch
输出电源	4 5V/O 5A 5V/3A 12V/3A
USB接口	TyPe-C
数字天空端	支持DI/Vista/蜗牛
直插免焊接口	接收机4P模拟摄像头3P 模拟图像传输A上效字视频 传输 6F无刷 ESC8P 2 套装 GPS6P
重量	9g
外形尺寸	39.4mmx 39.4mm
安装孔位	30.5mmx 30.50/M4

# F80 ESC

电调固件	BLHeli S\BLUEjay
MCU	EFM8BB51F16G-C
MOS管 FETS	NTMFS5C430NLTIG-01
持续最大电流	80Ax4
峰值最大电流	80AX4-10s
TVS管	有
电解电容	50v1000uf Low ESR Capacitor X 2
电机协议	Dshot300/Dshot600/ PWM/Bi-Directional Dshot
电池输入	3-8 LIPO
电流计	支持
电源输出	VBAT
重量	35.7g
外形尺寸	58.369mmx57.4mm
安装孔位	30.5mmx 30.50/M4
工作温度	20'c-80c
储存温度	20'c-70'CC
工作温度	20-95%

