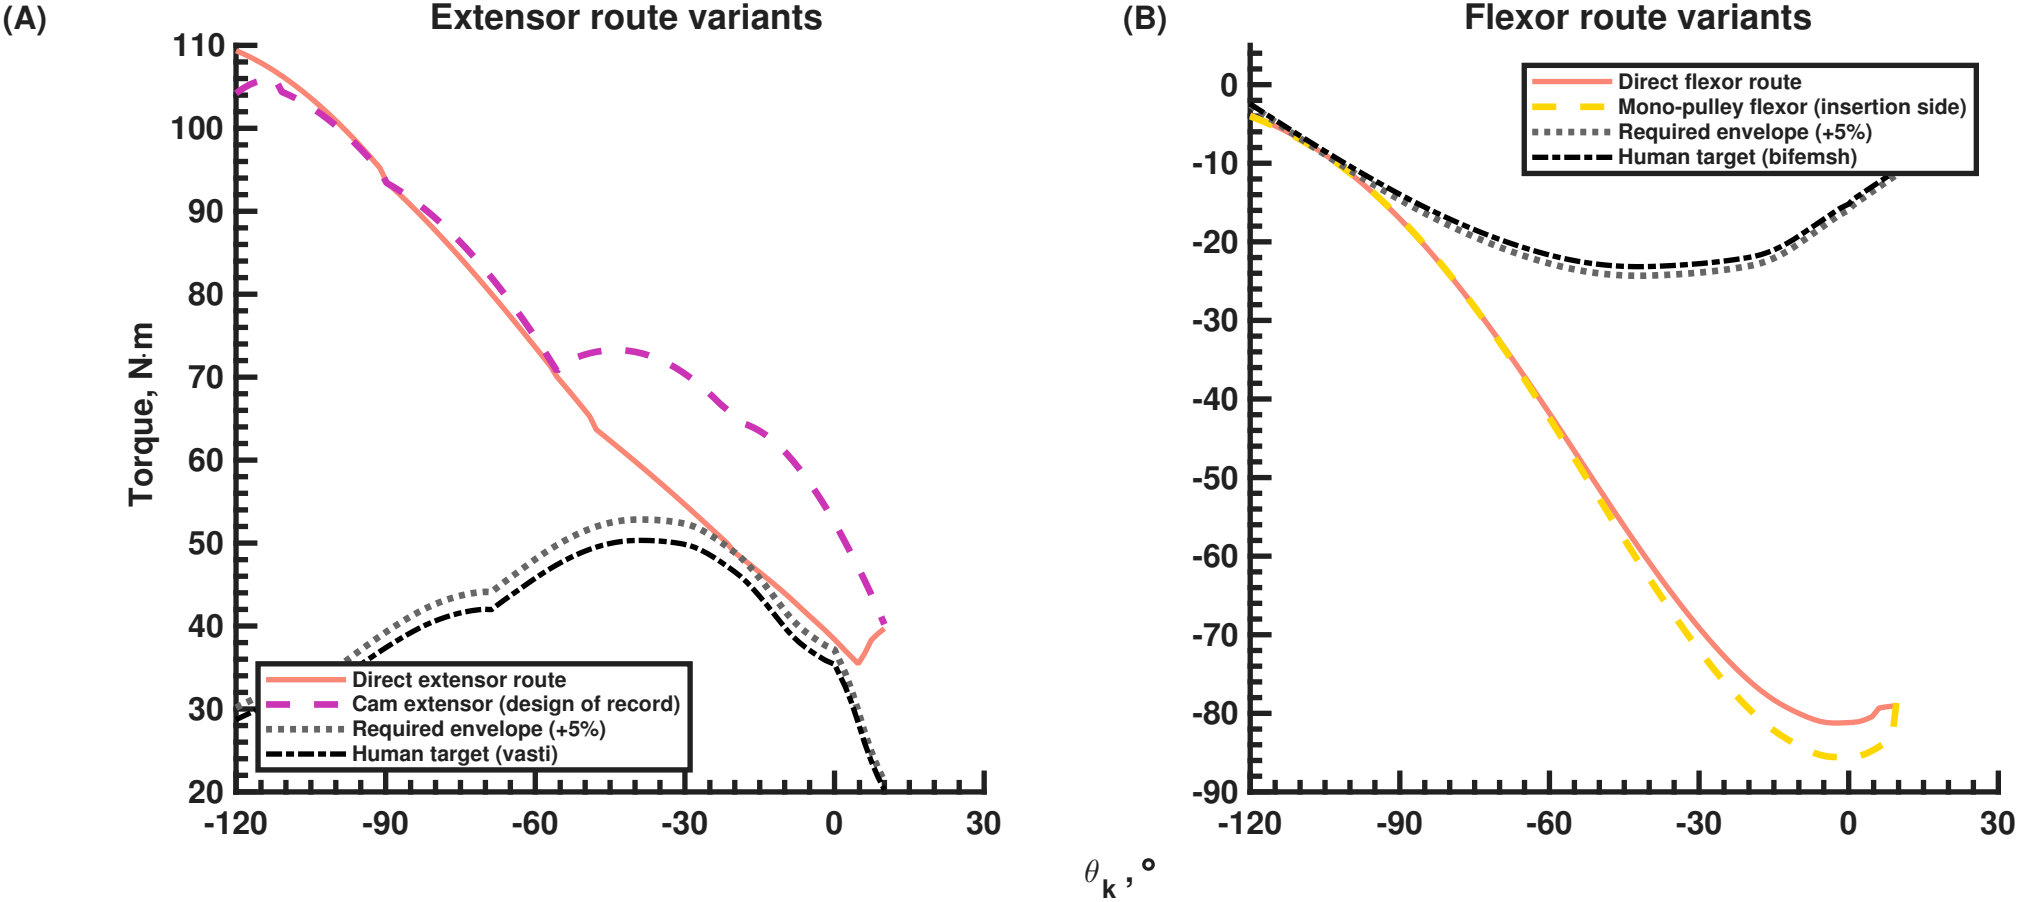
(A)
Extensor route variants
Torque, N·m
110
100
90
80
70
60
50
40
30
20
-120
-90
-60
-30
0
30
Direct extensor route
Cam extensor (design of record)
Required envelope (+5%)
Human target (vasti)
(B)
Flexor route variants
0
-10
-20
-30
-40
-50
-60
-70
-80
-90
-120
-90
-60
-30
0
30
Direct flexor route
Mono-pulley flexor (insertion side)
Required envelope (+5%)
Human target (bifemsh)
θ_k, °