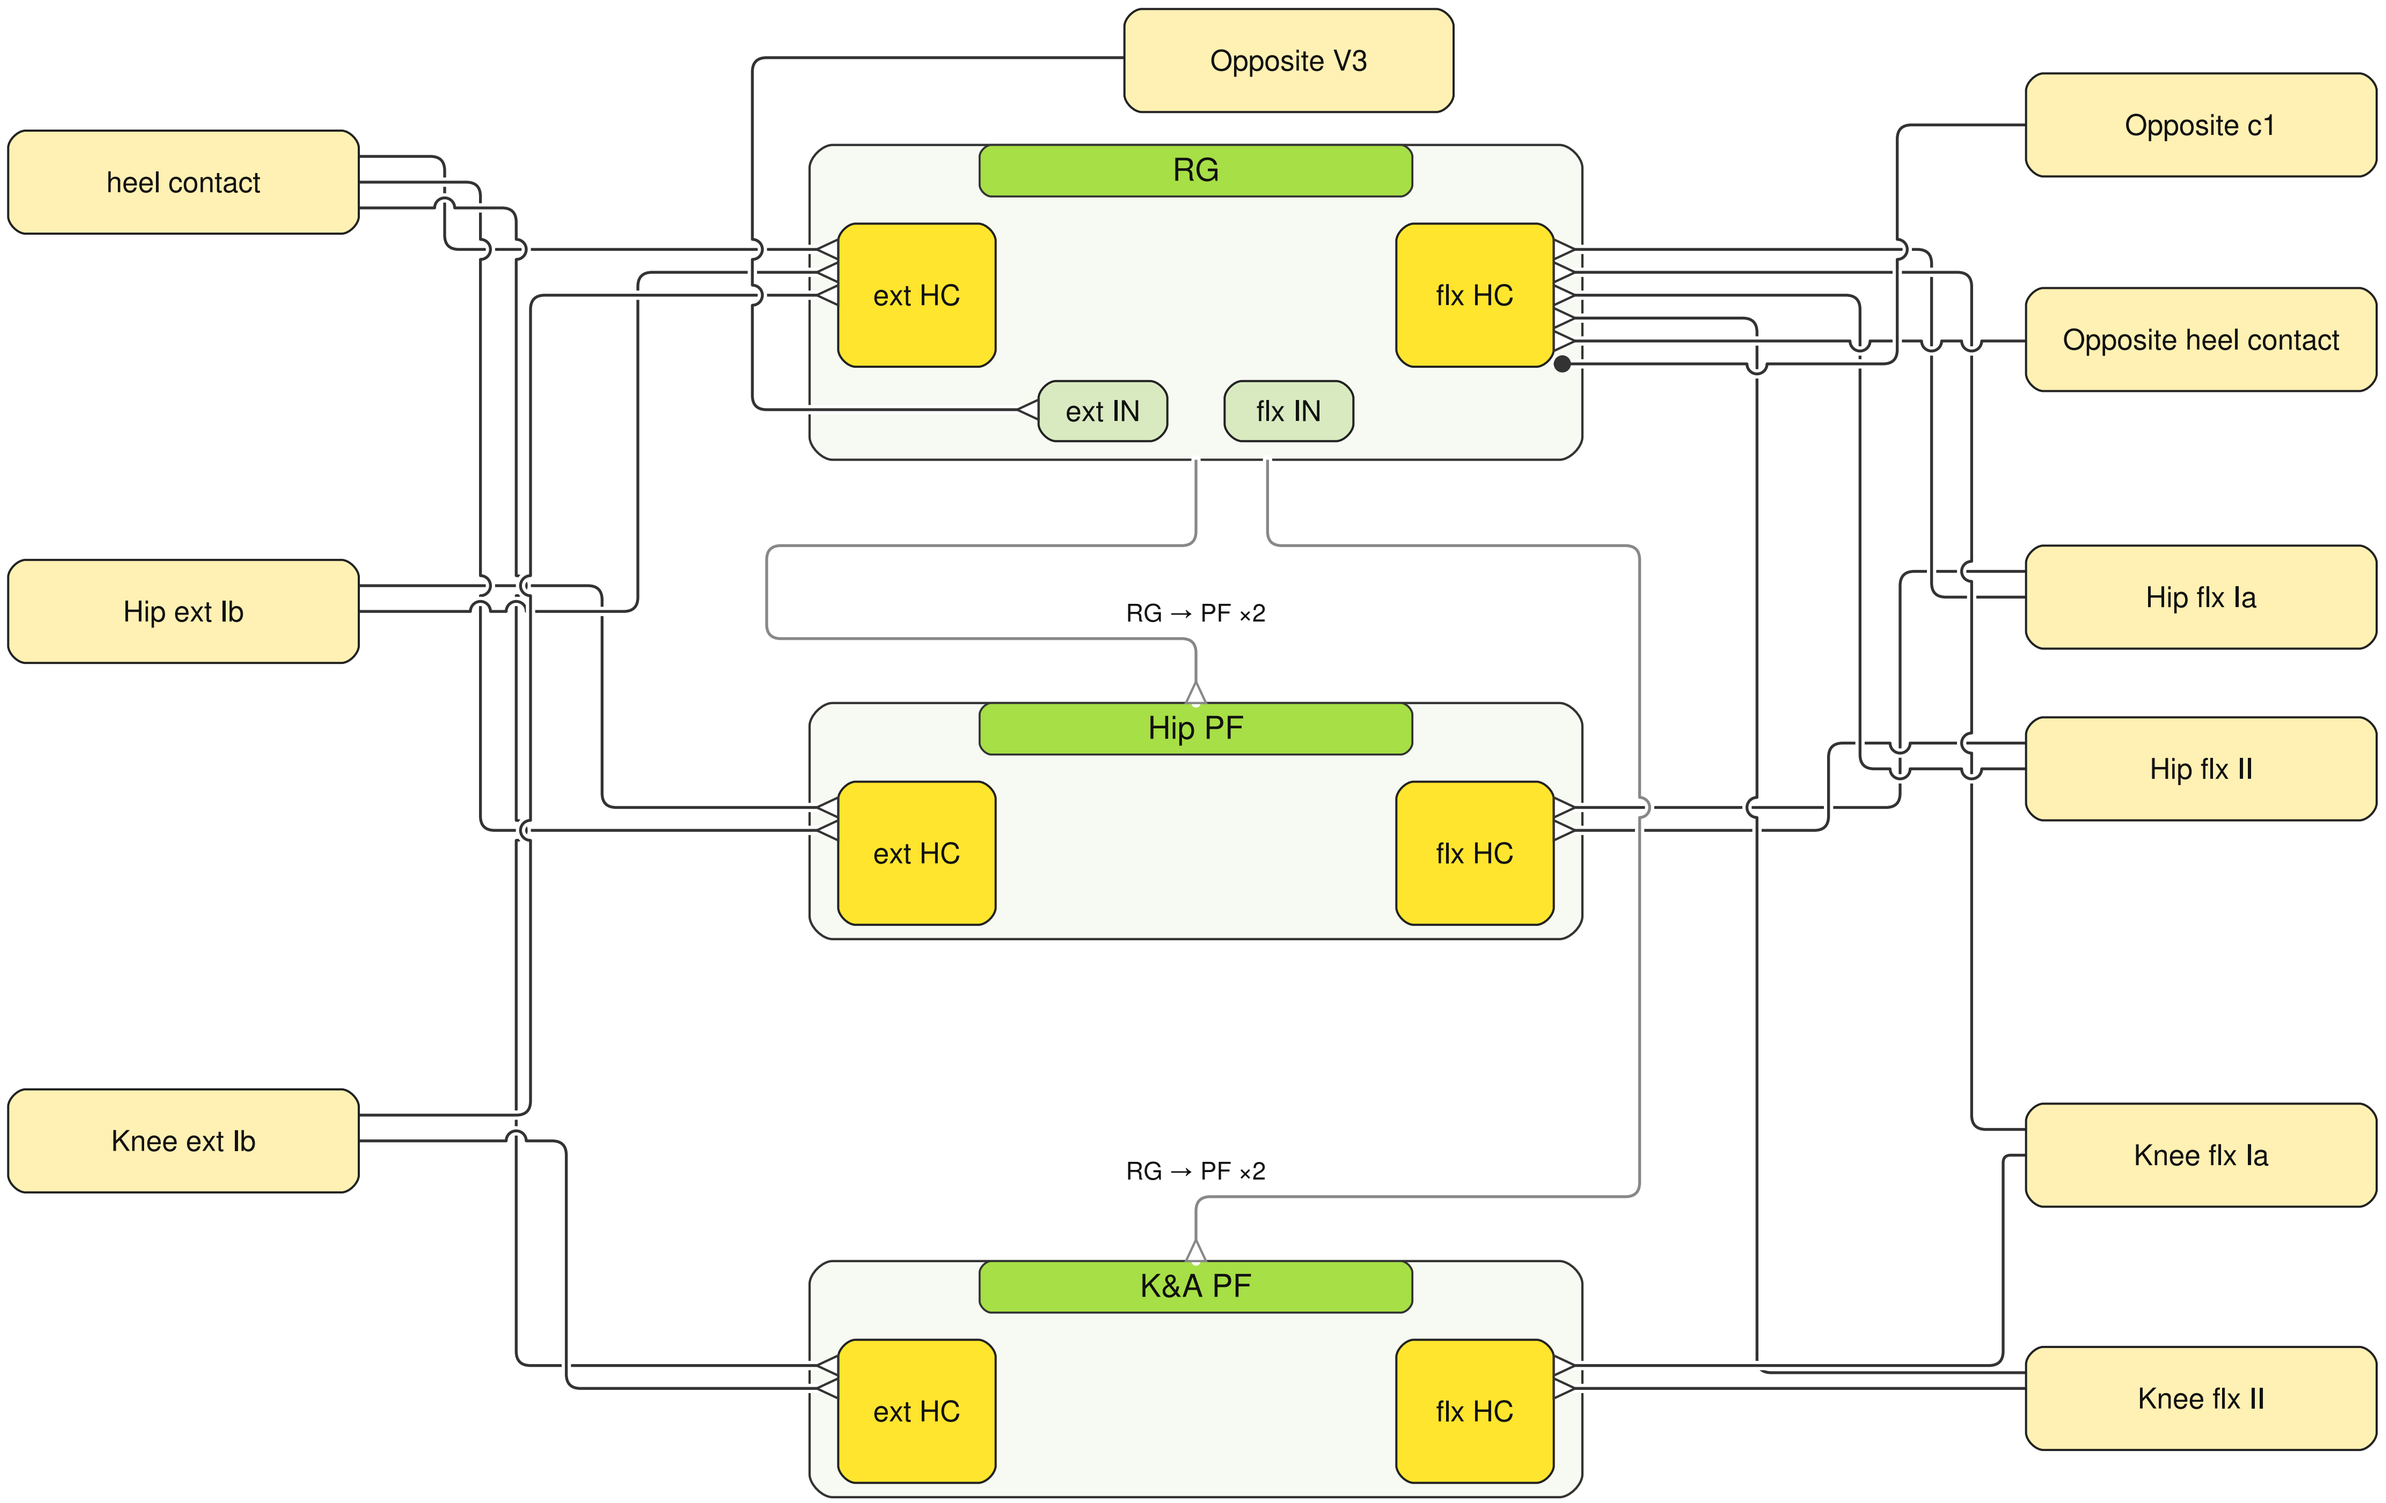


Excitation: triangle base on destination · Inhibition: filled circle · Crossings: semicircular bridges

Internal RG/PF wiring omitted. Opposite-side sources are placed beside their RG destinations.