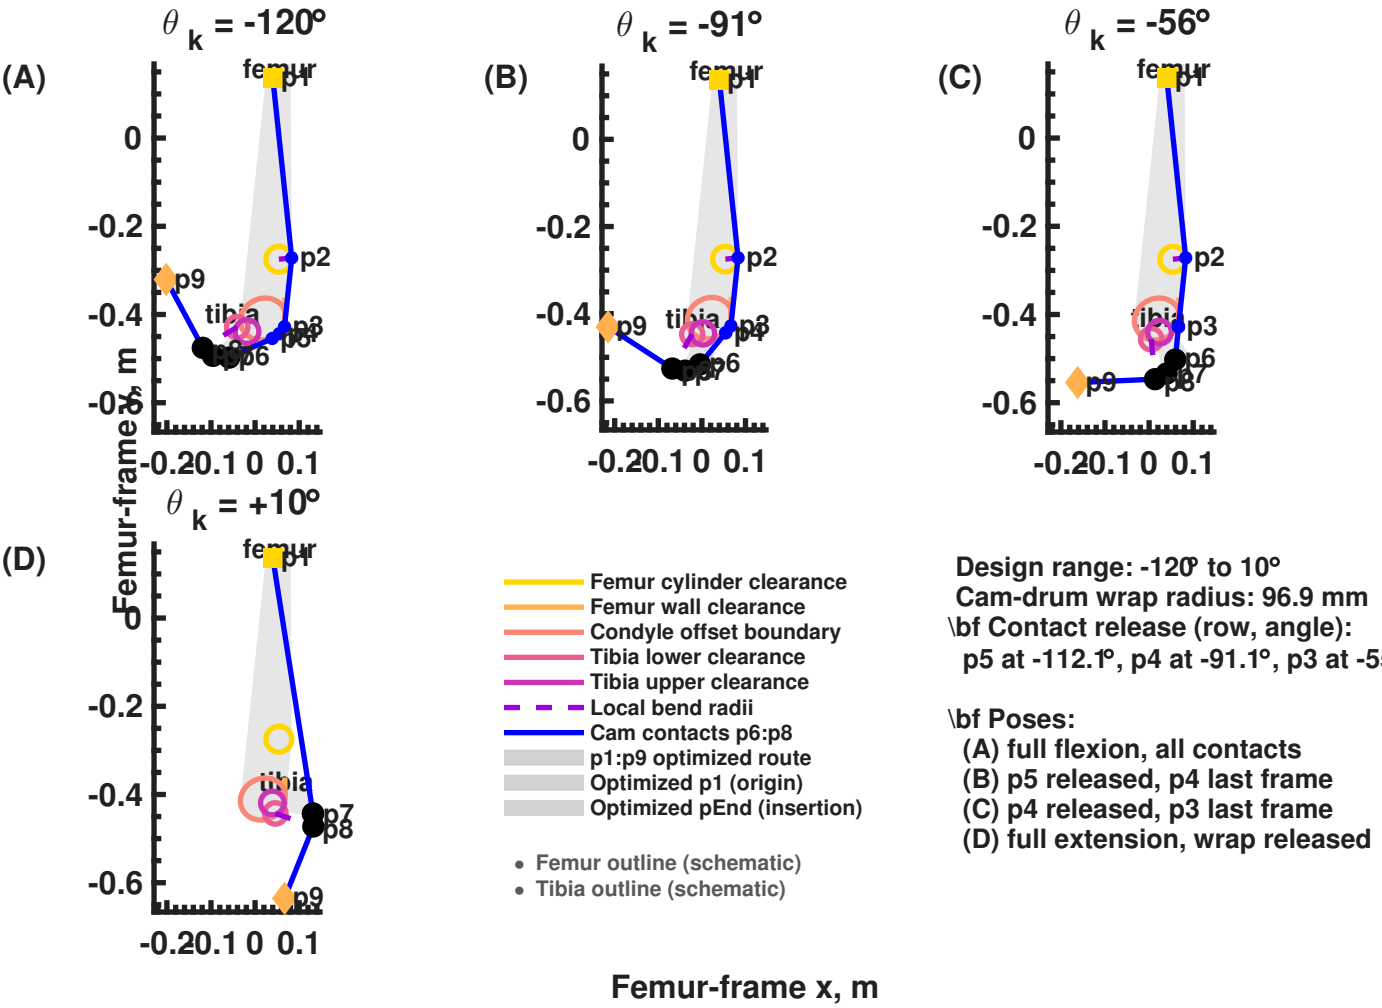

Design range: -120° to 10°
Cam-drum wrap radius: 96.9 mm
\bf Contact release (row, angle):
p5 at -112.1°, p4 at -91.1°, p3 at -55.7°, p2 at -22.8°, p6

\bf Poses:
(A) full flexion, all contacts
(B) p5 released, p4 last frame
(C) p4 released, p3 last frame
(D) full extension, wrap released