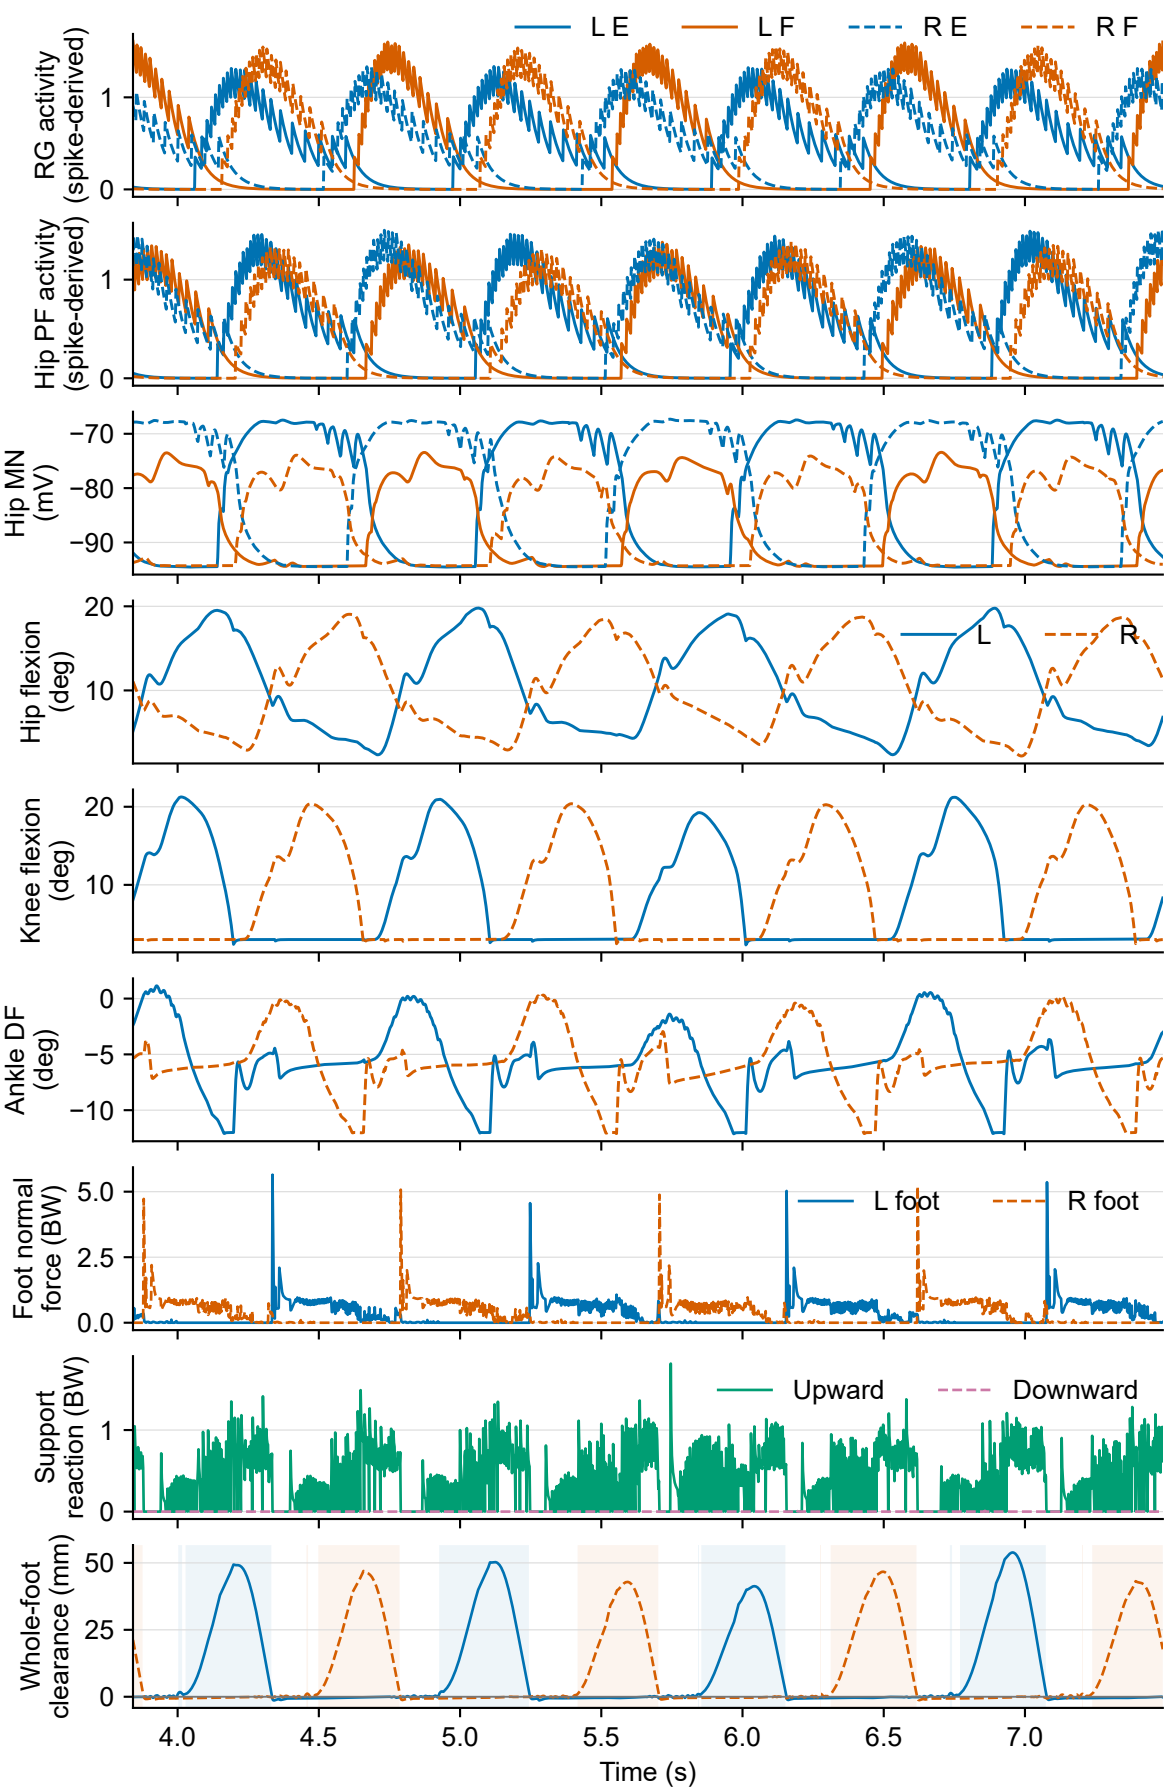


RG/PF: filtered population spike activity; MNs: graded voltage. Lower shading: unloaded whole-foot clearance. Passive rails/guides; full-run 10/9 swings, 36.48% BW mean net support.