ANT**MINER**

S19k Pro

Product Manual

Feb. 2024

BITMAIN

BITAMIN TECHNOLOGIES INC.

www.bitmain.com

1.Specification

Product Glance	Value
Model	**S19k Pro**
Version	**K1-10**
Crypto algorithm/coins	**SHA256 | BTC/BCH**
Typical Hashrate, **TH/s**[1-1]	**115**
Power on wall @25℃[1-2], **Watt**[1-1]	**2645**
Power efficiency on wall@25℃[1-2], **J/TH**[1-1]	**23**

Detailed Characteristics	Value
Power supply	
Power supply AC input voltage, **Volt**[2-1]	**200~240V AC**
Power supply AC Input Frequency Range, **Hz**	**50~60**
Power supply AC Input current, **Amp**[2-2]	**20**
Adapted AC output power requirement, **W**[2-3]	**4000**
Hardware Configuration	
Network connection mode	**RJ45 Ethernet 10/100M**
Server size (Length*Width*Height, w/o package), **mm**	**400*195*290**
Server size (Length*Width*Height, with package), **mm**	**570*316*430**
Net weight, **kg**	**14.6**
Gross weight, **kg**	**16.4**
Noise, **dBA** @25℃ [2-4]	**72**
Environment Requirements	
Operation temperature, ℃	**0~45**
Storage temperature, ℃	**-20~70**
Operation humidity, **RH**	**10%~90%**
Operation altitude, **m**[2-5]	**≤2000**

Notes:

(1-1) The Hashrate value, Power on wall, and Power efficiency on wall are all typical values, the actual Hashrate value fluctuates by ±3%, and the actual Power on wall and Power efficiency on wall fluctuate by ±5%.

(1-2) Inlet air temperature.

(2-1) Caution: Wrong input voltage may probably cause server damaged.

(2-2) Two AC input wires, 10A per wire.

(2-3) Caution: It is strongly recommended that the power on wall of the miner does not exceed this value.

(2-4) Max condition: Fan is under max RPM(rotation per minute).

(2-5) When the server is used at an altitude from 900m to 2000m, the highest operating temperature decreases by 1°C for every increase of 300m.

2. Working Mode

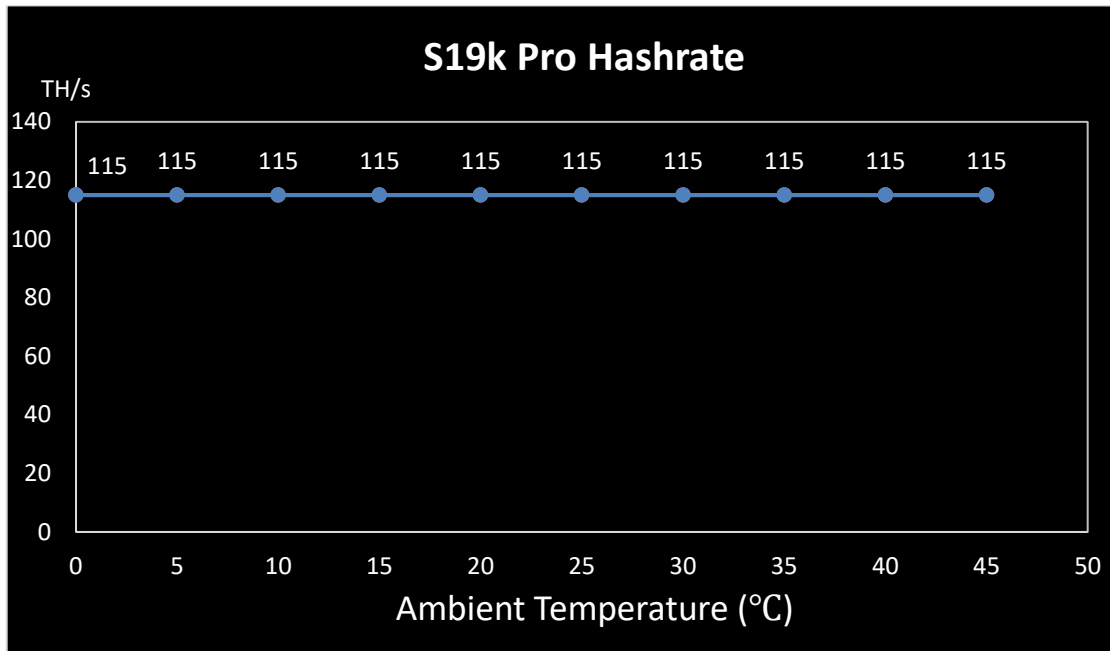| Working mode	NEM[(3-1)]	HEM[(3-2)]
Operation temperature, **°C**	**0~45**	**0~40**
Hashrate, **TH/s**	**115**	**136**
Power on wall@25℃, **Watt**	**2645**	**/**
Power efficiency on wall@25℃, **J/TH**	**23.0**	**/**

Notes:

(3-1) NEM: Normal Energy Mode
(3-2) HEM: High Energy Mode

2. Performance Curves

(1) Hashrate vs. Ambient Temperature

(2) J/T vs. Ambient Temperature