
DEMONSTRATE THE SIX (6) PROCEDURES OF NET PROGRAMMING

1. Fixed Frequency

- Select Programming Key (button 8)
- Select Norm
- Select Net
- Select Net to Modify (01)
- Select Active in list (Yes)
- Select Net Type (Fixed Frequency)
- Select Adv Repeater (NO)



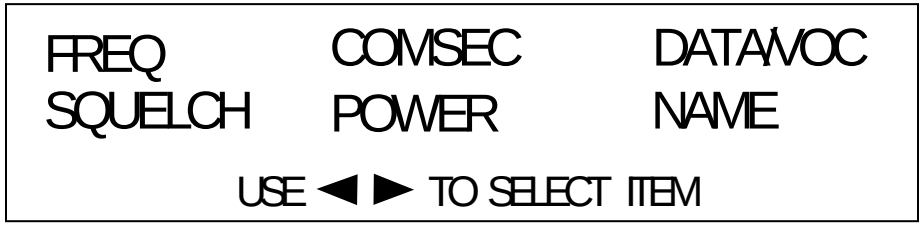

DEMONSTRATE THE SIX (6) PROCEDURES OF NET PROGRAMMING

1. Fixed Frequency

- Select Frequency (Enter)
- Select Rx Frequency (41.0750)
- Select Tx Frequency (41.0750)
- Select Receive Only (NO)

FREQ	COMSEC	DATA/VOC
SQUELCH	POWER	NAME

USE ◄ ► TO SELECT ITEM



DEMONSTRATE THE SIX (6) PROCEDURES OF NET PROGRAMMING

2. COMSEC

- Select COMSEC (Enter)
- Select Encryption Key (TEK02)
- Select CRYPTO Mode (MINERR)

FREQ	COMSEC	DATA/VOC
SQUELCH	POWER	NAME


USE ◄ ► TO SELECT ITEM



DEMONSTRATE THE SIX (6) PROCEDURES OF NET PROGRAMMING

3. Data/Voice

- Select DATA/VOICE (Enter)
- Select DATA/VOICE (VOICE),Enter
- Select D/V Type (Simple)
- Select FM Deviation (8.0 KHz)

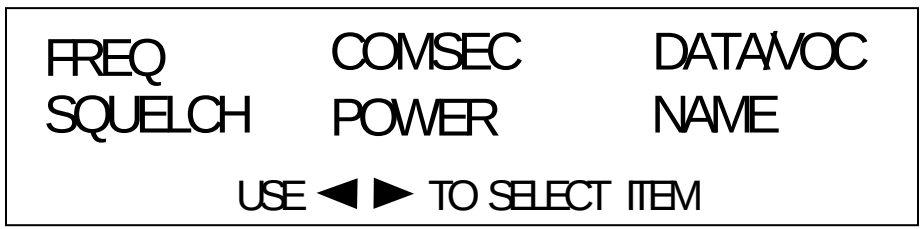



DEMONSTRATE THE SIX (6) PROCEDURES OF NET PROGRAMMING

4. Squelch
   - Select Squelch (Enter)
   - Select Digital Squelch (On)
   - Select Analog Squelch Type (Tone)

FREQ	COMSEC	DATA/VOC
SQUELCH	POWER	NAME

USE ◄ ► TO SELECT ITEM



DEMONSTRATE THE SIX (6) PROCEDURES OF NET PROGRAMMING

5. Power
   - Select Power (Enter)
   - Select Transmit Power (Low)

FREQ	COMSEC	DATA/VOC
SQUELCH	POWER	NAME

USE ◄ ► TO SELECT ITEM



DEMONSTRATE THE SIX (6) PROCEDURES OF NET PROGRAMMING

6. Name

- Select Name (Enter)
- Select Change Name (3SRB), Enter
- Press “CLR”, Back To General Screen

FREQ	COMSEC	DATA/VOC
SQUELCH	POWER	NAME

USE ◄ ► TO SELECT ITEM

