




POWER INPUT: 5 V from payload rail (JST-GH, locking)

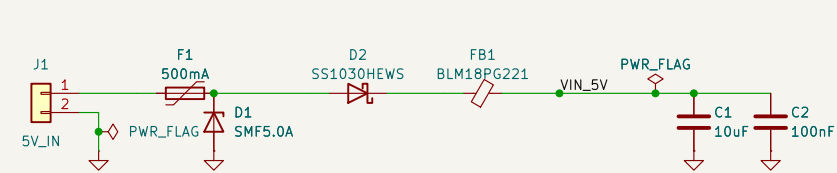


LOW-NOISE LDOs: separate rail for the TCXO

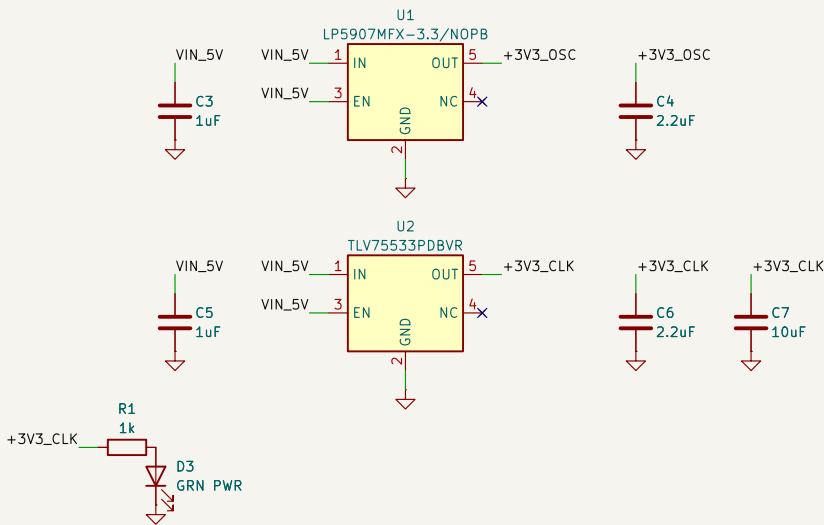

10 MHz SOURCE: SiT5155 Super-TCXO + LMK1C1104 1:4 buffer

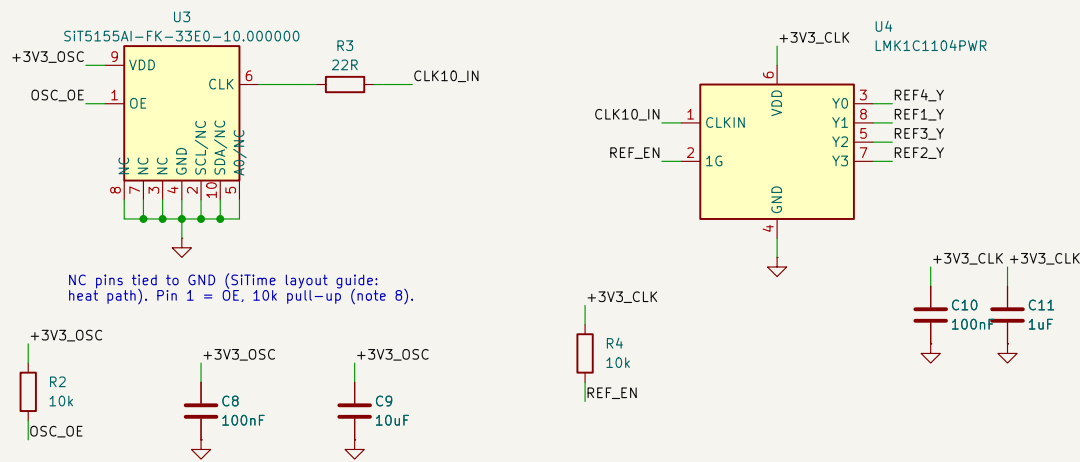


TEST POINTS / MECHANICAL

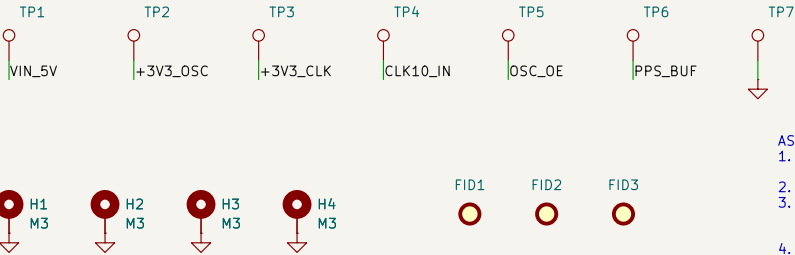


ASSEMBLY NOTES

- U3 SiT5155: water-soluble flux only. No no-clean flux. No ultrasonic or megasonic cleaning (SiTime).
- Reflow: IPC/JEDEC J-STD-020 profile.
- J2 SMA (132134): hand-solder after reflow. J3-J10 SMP (SMP-MSSB-PCT10T): remove the cap, insert loose, mate the SDRs, solder the legs from the back (self-align), then remove the SDRs and solder the tab on top.
- Outputs: J3-J6 10 MHz ~ +7 dBm/50R, J7-J10 PPS 3.3 V CMOS.

10 MHz OUTPUTS x4: DC block -> 5th-order Chebyshev LPF (fc 13 MHz, 50R) -> 3 dB pad -> SMP

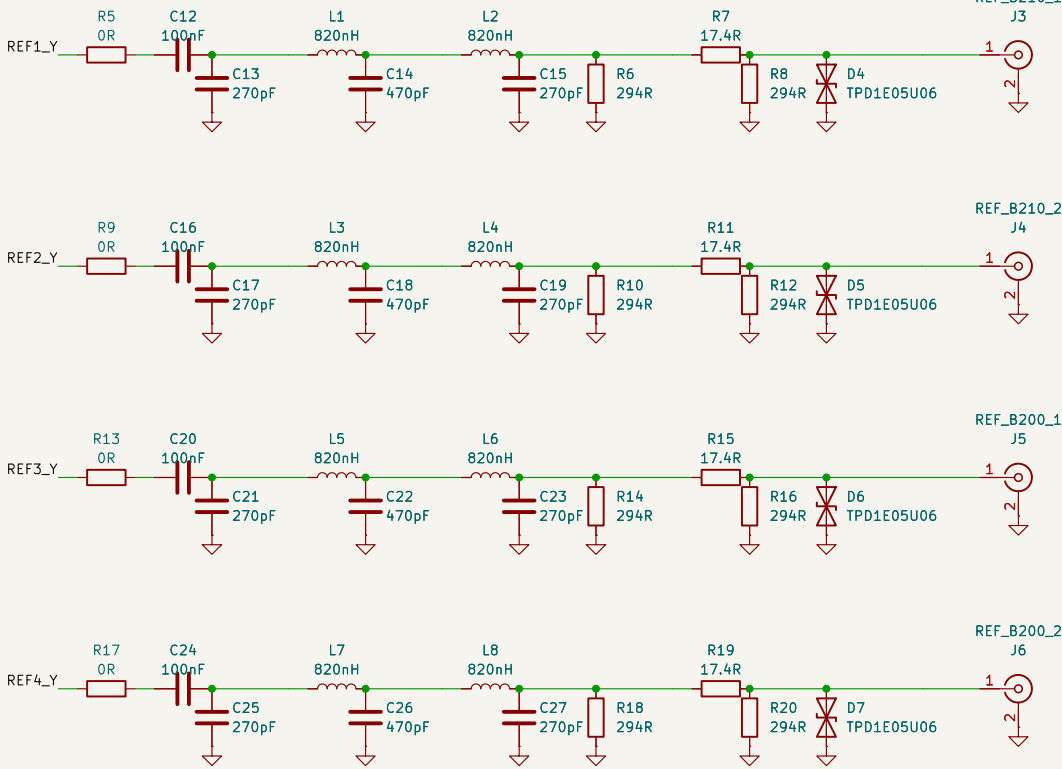

PPS: SMA in -> Schmitt buffer -> quad buffer -> 22R -> SMP x4 (3.3 V CMOS, DC coupled)

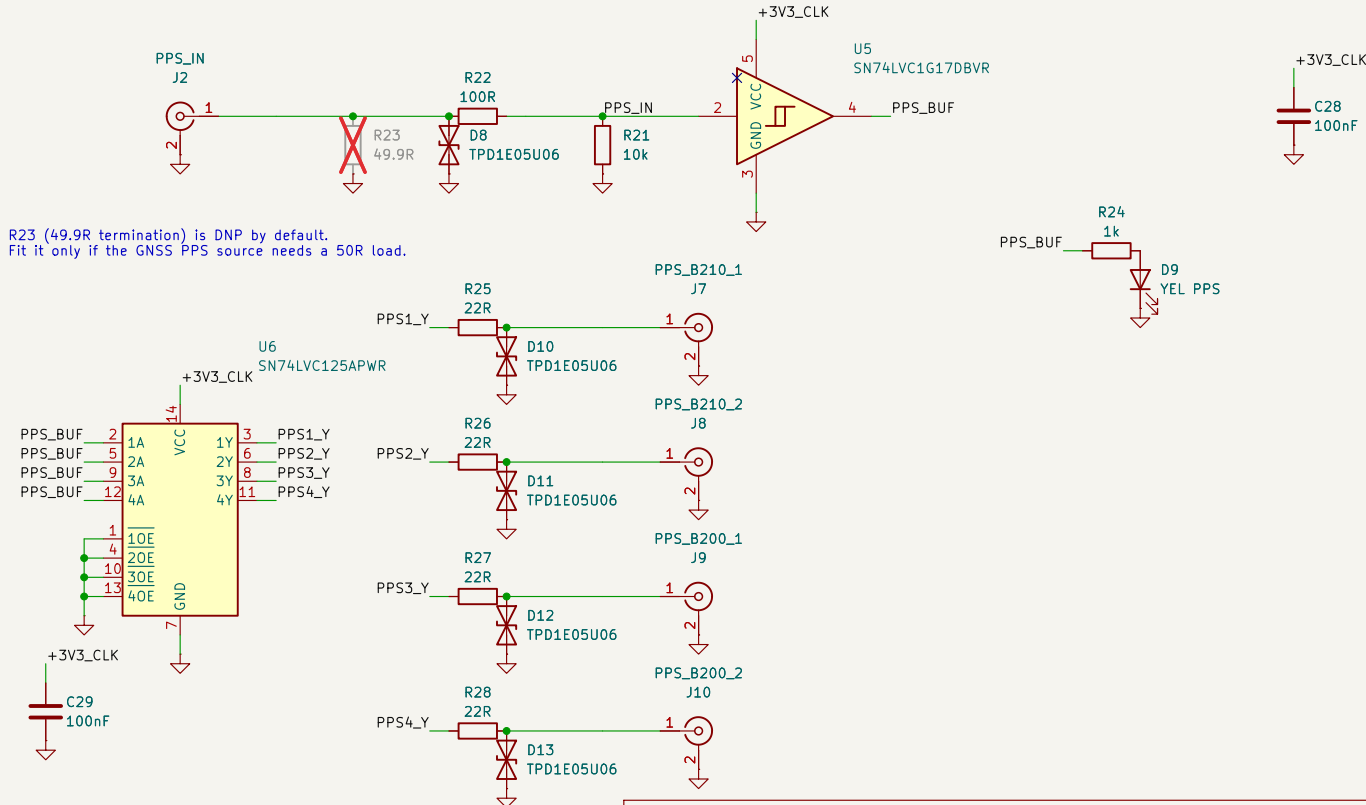

Generated by design.py - edit values there and re-run
SiT5155 Super-TCXO, 4x 10 MHz + 4x PPS to 2x B210 + 2x B200

CU Boulder - HERON

Sheet: /
File: heron_clock.kicad_sch

Title: HERON 10 MHz + PPS Distribution

Size: A3 Date: 2026-10-07
KiCad E.D.A. 10.0.6

Rev: B
Id: 1/1