


## POWER INPUT: 5 V from payload rail (JST XH, friction lock)





## LOW-NOISE LDOs: separate rail for the TCXO

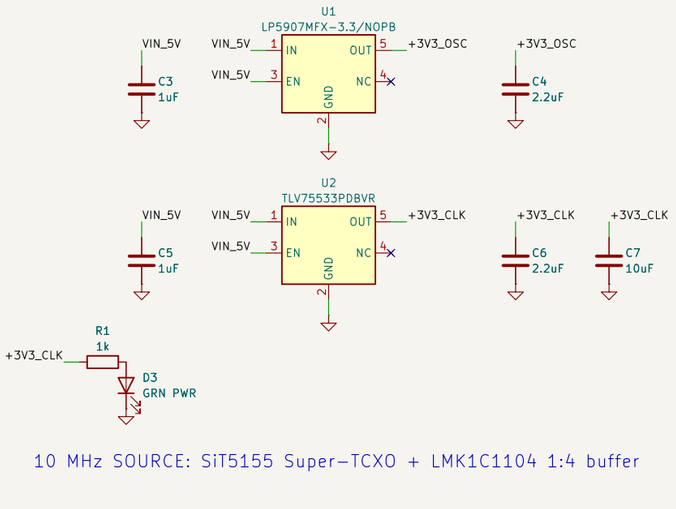


## 10 MHz SOURCE: SiT5155 Super-TCXO + LMK1C1104 1:4 buffer

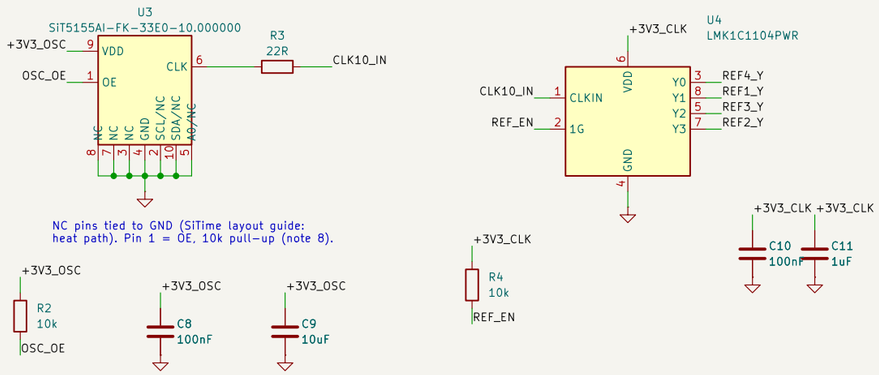


## TEST POINTS / MECHANICAL









ASSEMBLY NOTES
1. U3 SiT5155: water-soluble flux only. No no-clean flux.
   No ultrasonic or megasonic cleaning (SiTime).
2. Reflow: IPC/JEDEC J-STD-020 profile.
3. J2 SMA (132134): hand-solder after reflow. J3–J10 SMP (SMP-MSSB-PCT10T):
   remove the cap, insert loose, mate the SDRs, solder the legs from the
   back (self-align), then remove the SDRs and solder the tab on top.
4. Outputs: J3–J6 10 MHz - +7 dBm/50R, J7–J10 PPS 3.3 V CMOS.

## 10 MHz OUTPUTS x4: DC block -> 5th-order Chebyshev LPF (fc 13 MHz, 50R) -> 3 dB pad -> SMP

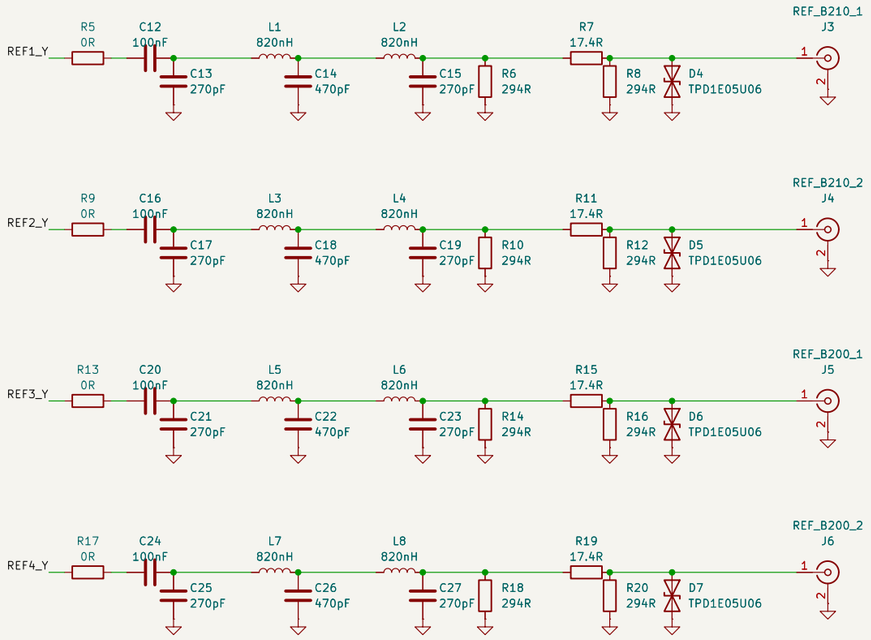


## PPS: SMA in -> Schmitt buffer -> quad buffer -> 22R -> SMP x4 (3.3 V CMOS, DC coupled)

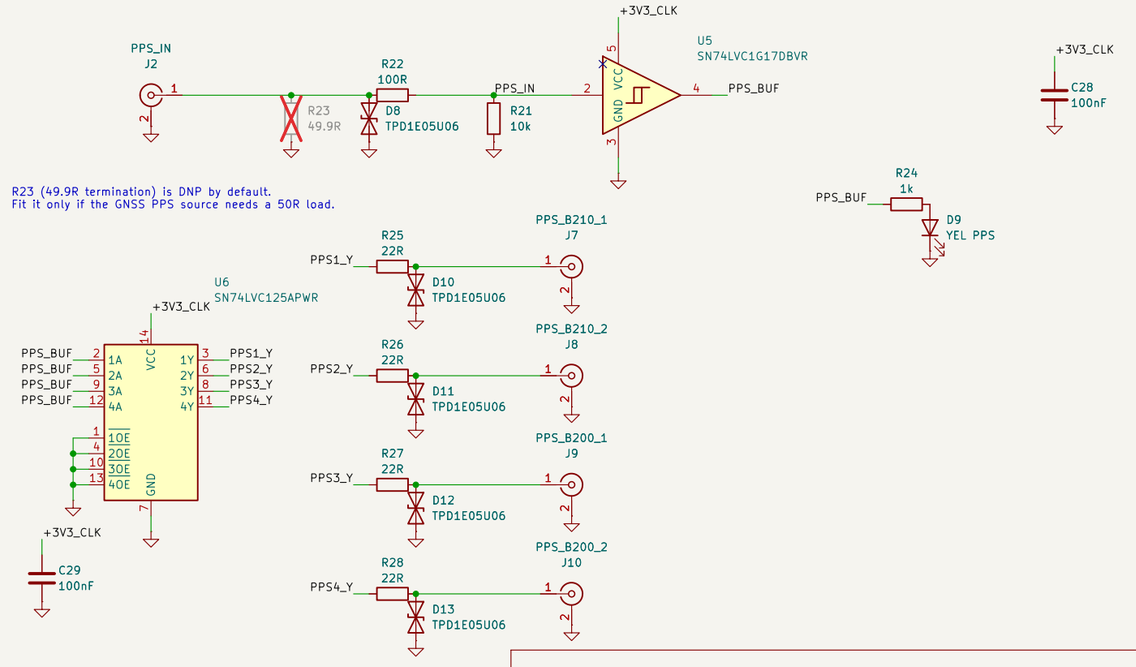


Generated by design.py — edit values there and re-run
SiT5155 Super-TCXO, 4x 10 MHz + 4x PPS to 2x B210 + 2x B200
**CU Boulder — HERON**

Sheet: /
File: heron_clock.kicad_sch

***Title: HERON 10 MHz + PPS Distribution***

| Size: A3 | Date: 2026-10-07 | **Rev: C** |
|---|---|---|
| KiCad E.D.A. 10.0.6 | | Id: 1/1 |