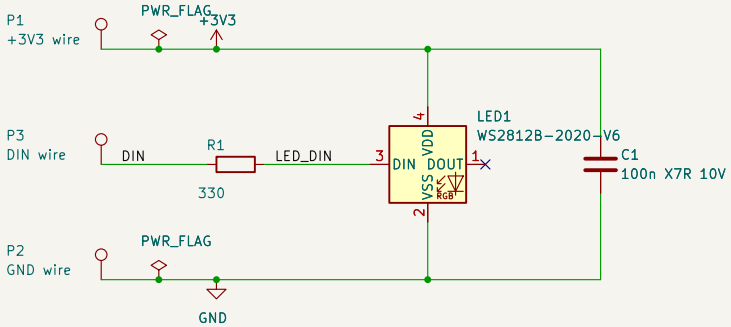


LED1: WS2812B-2020-V6 only (3.3-5.3 V), not the pre-V6 WS2812B-2020 (3.7 V minimum) (D-065).
Powered from D1's 3.3 V; DO not used (single LED).

C1: VDD filter, 100 nF at LED1 (V6 datasheet application circuit, V1.1+).
R1: 330 R in DIN at LED1: limits clamp current if 3V3 is lost while GPIO6 is high;
with LED1's 15 pF input, tau = 5 ns against the 220 ns shortest pulse.

P1-P3: wire pads on the back, right half (local u 2.3-5.0; D-065).
3 x AWG30 PTFE to D1 J6 (Sensor AD): P1 -> pin 1 (3V3), P2 -> pin 2 (GND), P3 -> pin 3 (GPIO6).

Spec: docs/03-build/04-pcbs/pcb-11-status-led/README.md
WS2812B-2020-V6 behind the crown light pipe (HEAD-CAD-12, D-065)
Makad

Sheet: /
File: pcb-11-status-led.kicad_sch

Title: PCB-11 Status LED carrier

Size: A4	Date: 2026-10-26	**Rev: A**
KiCad E.D.A. 10.99.0-5923-gde08734017		Id: 1/1