

Audio-Frequency Microcoil Sensing for Proximity and Material-Response Characterization in Flexible Robotic Skins

A Research Platform, Exploratory Evidence Audit, and Prospective Validation Protocol

Francisco Angulo de Lafuente

Independent Researcher, Spain

Preprint — 25 August 2026

Abstract

Robotic skin requires compliant, distributed sensing that can support both gentle pre-contact interaction and contact-level material response. This paper presents *Sensory Skin Lab*, an open browser-based research platform for evaluating fine copper microcoils intended for encapsulation in silicone-like flexible substrates. The system generates audio-band continuous or gated excitation, acquires a receive channel through a commodity audio interface, extracts amplitude, phase, transient, noise, and saturation features, and provides transparent empirical calibration for target response and 0 cm to 15 cm proximity. We position the concept relative to capacitive electronic skin, magnetic tactile skin, flexible inductive sensors, and magnetic-induction tomography. We then audit a set of uncontrolled pilot observations: strong response to a nearby human hand/body, weaker response to a ferrous pan, little apparent response to wood or plastic, persistence through an approximately 5 cm wooden barrier, and dependence on software excitation settings even when the physical output path was disconnected. These observations demonstrate a detectable signal but do *not* establish electromagnetic material discrimination or through-wall sensing, because body capacitance, codec DAC-ADC leakage, common power/ground modulation, automatic gain control, and motion remain viable explanations. Accordingly, no retrospective accuracy or range claim is made. The primary contribution is a falsifiable measurement model and a preregistered-style prospective protocol using isolated transmit and receive chains, non-conductive positioning, randomized blocked trials, negative controls, held-out objects, and explicit success thresholds. The resulting platform is suitable for disciplined feasibility studies on low-cost microcoil arrays while preserving a clear boundary between demonstration, hypothesis, and validated robotic-safety performance.

Keywords: electronic skin; robotic skin; microcoil; inductive sensing; proximity sensing; magnetic induction; human-robot interaction; Web Audio; reproducible experimentation.

Evidence status. This manuscript reports a software/hardware research design and qualitative exploratory observations. It contains no controlled performance dataset and makes no validated claim of material classification, absolute range, through-wall imaging, or safety certification. All numerical success criteria in section 6 are prospective.

1 Introduction

Human skin integrates dense mechanoreception with compliance, distributed geometry, and continuous feedback. Robotic equivalents remain difficult because area, wiring, stretch, hysteresis, calibration, energy, and robustness must be solved simultaneously [Dahiya et al., 2010, Hammock et al., 2013, Chortos et al., 2016]. Large-area capacitive systems have demonstrated scalable tactile coverage [Someya et al., 2004, Maiolino et al., 2013], while multimodal modules and neuromorphic afferent pathways show how local transducers can become useful perception systems [Mittendorfer and Cheng, 2011, Tee et al., 2015, Kim et al., 2018]. Yet physical human-robot interaction benefits from sensing before contact as well as during contact: a robot that estimates approach over the final centimetres can reduce speed before a handover, handshake, or incidental collision [Pang et al., 2018, Fonseca et al., 2023].

This work investigates whether fine, inexpensive copper coils embedded in a compliant skin can form an additional sensing modality. The motivating vision is not a single “metal detector” attached to a robot, but a distributed array whose frequency-dependent electromagnetic response may complement force, vision, and joint-torque sensing. Inductive approaches are attractive because the conductors can be sealed, interrogation can be contactless, and coil geometry is compatible with flexible circuits or enamelled wire. Their interpretation is nevertheless difficult. The measured voltage may combine true target interaction with direct transmitter-receiver coupling, electric-field coupling to a human body, mechanical deformation of the coil, acoustic microphonics, and electronic leakage inside the audio interface.

We make four contributions:

1. an open, resource-conscious browser instrument for controlled audio-frequency excitation, feature extraction, calibration, and CSV logging;
2. a physics-based measurement model that exposes alternative signal paths rather than treating any response as target detection;
3. an explicit evidence audit of the existing pilot observations, separating observation from interpretation; and
4. a prospective, preregistered-style protocol for evaluating proximity estimation and three-way target-response discrimination without operator-body leakage.

2 Related Work and Research Gap

2.1 Flexible tactile and proximity skins

Pressure-sensitive e-skins span piezoresistive, capacitive, piezoelectric, triboelectric, optical, and magnetic transduction [Hammock et al., 2013, Nguyen and Lee, 2022, Roberts et al., 2021]. Microstructured dielectric layers can greatly improve capacitive pressure sensitivity [Mannsfield et al., 2010], and hierarchical structures can resolve pressure direction [Boutry et al., 2018]. Systems such as ReSkin and AnySkin emphasize replaceability, transfer, and practical robot learning around magnetic skins [Bhirangi et al., 2022, 2024]. These achievements concern contact-rich tactile sensing; pre-contact distance and material response remain a complementary problem.

Self-capacitive proximity sensing is mature and naturally sensitive to the human body. Fonseca *et al.* combined self-capacitance with piezoresistance in a flexible interface and explicitly documented susceptibility to moving robot actuators [Fonseca et al., 2023]. The broader proximity-skin literature likewise stresses field geometry, parasitic capacitance, grounding, and environmental drift [Wu et al., 2024]. This is directly relevant: a strong hand response is not diagnostic of inductive coupling because a hand is also a large lossy conductor capacitively coupled to ground.

2.2 Magnetic and inductive skins

Magnetic skins can infer contact force from deformation of magnets or magnetized films. Yan *et al.* demonstrated force decoupling and learned super-resolution using a sinusoidally magnetized film and Hall sensing [Yan et al., 2021]; ReSkin uses a replaceable elastomeric magnetic medium over magnetometers [Bhirangi et al., 2022]. These are deliberately magnetized tactile transducers, distinct from the passive target perturbation explored here.

Flexible coils offer another route. Peng *et al.* combined a planar coil, porous ferrite, and soft conductive film, using two interrogation frequencies to decouple bending and force [Peng et al., 2024]. Dingley *et al.* used mutual-inductance arrays and tomography to reconstruct contact-related changes in an engineered skin medium [Dingley et al., 2023]. Fabrication materials and geometry materially affect resonant-sensor quality [Charkhabi et al., 2020]. These studies establish that flexible inductive sensing is scientifically credible, but they do not validate arbitrary classification of remote human, metallic, and insulating targets using a commodity audio codec.

The research question is therefore:

Can audio-frequency microcoil elements embedded in compliant substrates provide repeatable, separable feature signatures for human/biological, metallic, and non-conductive targets while supporting calibrated 0 cm to 15 cm proximity estimation under controlled suppression of capacitive, acoustic, and electronic-crosstalk confounds?

3 Physical Basis and Measurement Model

3.1 Inductive response

For sinusoidal excitation at angular frequency ω , a receive coil coupled to a transmit coil has the idealized open-circuit component

$$V_{rx}(\omega) = j\omega M(\omega, \mathcal{T}, \mathbf{r}) I_{tx}(\omega), \quad (1)$$

where M is mutual inductance and depends on target properties $\mathcal{T}$ and position $\mathbf{r}$. A conductive target supports eddy currents that oppose the incident field and perturb both loss and apparent inductance. A magnetic target may also alter flux through permeability. In a real system the coil impedance is $Z_c = R_c + j\omega L_c$ with parasitic capacitance and frequency-dependent losses.

For a homogeneous conductor, the plane-wave skin depth is

$$\delta = \sqrt{\frac{2}{\omega\mu\sigma}}, \quad (2)$$

Table 1: Representative state of the art and the gap addressed by this work. Reported capabilities belong to the cited systems; they are not performance claims for Sensory Skin Lab.

Approach	Transduction	Strength	Principal confound/limitation	Relation to this work
Large-area capacitive skin [Maiolino et al., 2013]	Capacitance	Scalable, compliant tactile coverage	Parasitics, grounding, wiring	Baseline architecture for distributed skin
Hybrid proximity/force [Fonseca et al., 2023]	Self-capacitance + piezoresistance	Pre-contact and contact in one layer	EMI and actuator-dependent errors	Closest functional target; motivates controls
ReSkin/AnySkin [Bhirangi et al., 2022, 2024]	Magnetic elastomer + magnetometer	Replaceable, learnable tactile interface	Primarily contact; learned domain shift	Reference for dataset and transfer design
Soft magnetic skin [Yan et al., 2021]	Magnetized film + Hall array	Multi-axis force and learned resolution	Requires engineered magnetic layer	Demonstrates field-based tactile inference
Soft inductive bimodal sensor [Peng et al., 2024]	Coil + ferrite + conductor	Two-wire bending/force decoupling	Engineered target layers; contact regime	Direct evidence for flexible-coil sensing
EM-skin tomography [Dingley et al., 2023]	Mutual-inductance coil array	Spatial reconstruction and multi-touch	Dedicated multichannel hardware	Array-scale route beyond one coil
Sensory Skin Lab	Audio-band microcoil response	Open browser acquisition; explicit confound audit	Unvalidated pilot; commodity-codec leakage	Low-cost feasibility and controlled protocol

where μ and σ are permeability and conductivity. Although near-field coil geometry is not a plane wave, eq. (2) gives an important qualitative constraint: higher frequency normally *reduces* penetration into a good conductor. Frequency can still improve measured sensitivity by increasing induced voltage, eddy-current strength, or receiver signal-to-noise ratio. Those mechanisms must not be conflated with penetration.

3.2 Competing signal paths

The digitized sample is better represented as a superposition:

$$y(t) = h_{\text{em}}(\mathcal{T}, \mathbf{r}) * s(t) + h_{\text{direct}} * s(t) + h_{\text{codec}} * s(t) + h_{\text{cap}}(\mathbf{b}, g) * s(t) + h_{\text{mech}} * a(t) + n(t), \quad (3)$$

where h_{em} is target-dependent electromagnetic coupling, h_{direct} is direct coil/cable coupling, h_{codec} is electronic DAC–ADC or power/ground leakage, h_{cap} represents body/environment capacitance as a function of body configuration $\mathbf{b}$ and grounding g , $a(t)$ is vibration/acoustic excitation, and $n(t)$ is noise and drift. A useful experiment must identify h_{em} while controlling or estimating the other terms.

4 Sensory Skin Lab Platform

4.1 Design goals and implementation

Sensory Skin Lab is a client-side application implemented with TypeScript, React, and the Web Audio API [Angulo de Lafuente, 2026]. Audio samples are processed locally in an `AudioWorklet`; the application does not upload audio. The architecture was chosen for reproducibility and accessibility on commodity laptops and mobile browsers, not for metrology-grade timing. The interface supports:

- passive receive, continuous VLF, and gated burst/PI-like excitation;
- identical mono excitation on the left and right output channels;
- user controls for frequency, output level, sensitivity, threshold, burst duration, listen delay, and phase weight;
- empty-field baseline acquisition and automatic saturation indication;
- real-time amplitude, phase, transient-decay, noise, clipping, and combined-response metrics;
- empirical reference capture for human/biological, metallic, and non-conductive classes;

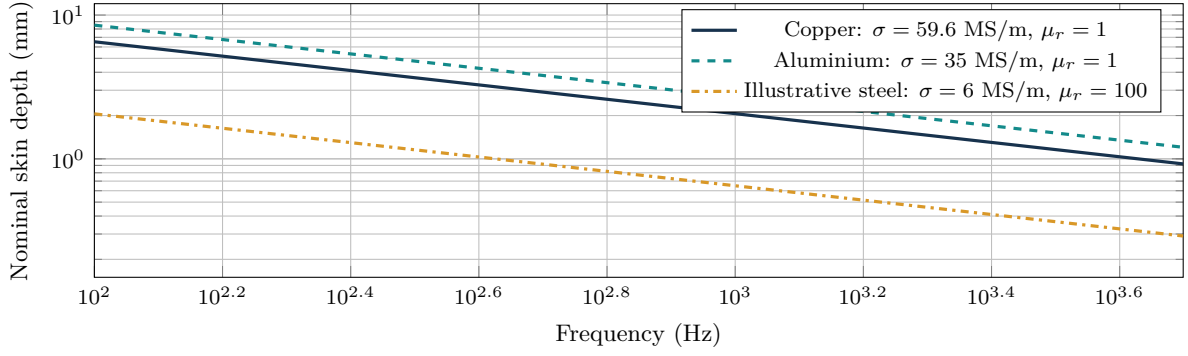


Figure 1: Analytical skin-depth curves from eq. (2); these are calculations, not measurements. Steel permeability is strongly alloy-, field-, and frequency-dependent, so the steel curve is illustrative only.

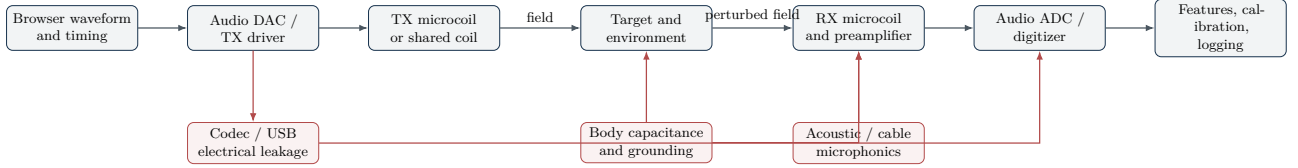


Figure 2: System architecture and causal confounds. Red paths can produce apparent “detection” without a target-specific inductive mechanism. The validation protocol isolates or randomizes these paths.

- proximity anchors at 15 cm, 10 cm, 5 cm, 2 cm and 0 cm; and
- five-sample-per-second CSV logging for offline analysis.

Browser audio stacks may apply undocumented resampling, gain, echo cancellation, noise suppression, or device routing. Constraints should be requested where supported, but every recorded session must log the browser, operating system, interface, nominal and realized sample rates, device identifiers, and whether signal enhancement is disabled.

4.2 Feature representation

For a measurement window $x[n]$ and baseline $x_0[n]$, the platform computes interpretable components rather than a black-box score. At the commanded frequency f_0 , complex demodulation gives

$$X(f_0) = \frac{2}{N} \sum_{n=0}^{N-1} x[n] w[n] e^{-j2\pi f_0 n / f_s}. \quad (4)$$

The amplitude residual and wrapped phase displacement are

$$\Delta A_{\text{dB}} = 20 \log_{10} \frac{|X| + \epsilon}{|X_0| + \epsilon}, \quad \Delta \phi = \text{wrap}(\angle X - \angle X_0). \quad (5)$$

For gated excitation, a transient descriptor compares energy in a configured post-blanking window with baseline energy. Noise is estimated outside the driven band, and clipping is determined from sample occupancy near full scale. The feature vector is

$$\mathbf{z} = [|\Delta A_{\text{dB}}|, |\Delta \phi|, |\Delta E_{\text{tr}}|, \Delta N, q_{\text{clip}}]^\top. \quad (6)$$

Saturated or invalid components are excluded from the combined score rather than allowed to dominate it. Adaptive ground/baseline tracking may update only in stable, target-free intervals and must freeze on threshold crossings.

The demonstration classifier stores a centroid μ_k for each user-captured class and assigns the nearest standardized centroid. Its displayed confidence is a relative separation between the smallest and second-smallest distances; it is not a calibrated posterior probability. For proximity, response strength is interpolated between target-specific anchors. Non-monotonic anchors must invalidate the distance display.

4.3 Proposed microcoil skin construction

The first physical demonstrator should use enamelled copper wire or a flexible printed spiral on a mechanically defined carrier, followed by separately cast silicone encapsulation. Direct co-printing of bare copper and “silicone-like” filament is not assumed to preserve insulation, trace position, or biocompatibility. The coil record must

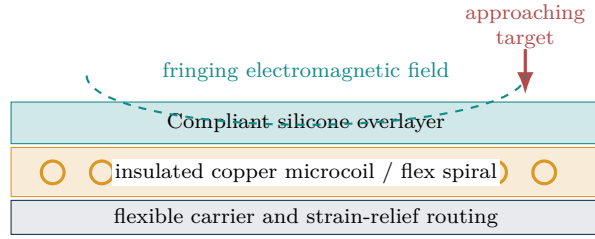


Figure 3: Proposed sensor stack. Independent force/contact sensing, electrical isolation, and temperature monitoring remain required for human-facing robotics.

Pilot condition	Hand	Body	Ferrous	Wood	Plastic	Behind board	Output absent
Strong response	Green	Green	White	White	White	White	White
Weaker response	White	White	Orange	White	White	Orange	White
Little apparent response	White	White	White	Blue	Blue	White	White
Confound evidence	White	White	White	White	White	White	Red

Figure 4: Qualitative audit matrix. A colored cell records an operator observation, not a measured effect size. “Behind board” combines hand and ferrous-pan observations; “output absent” is evidence for an electronic or capacitive confound.

include wire diameter, turns, inner/outer diameter, DC resistance, inductance, quality factor, self-resonant frequency, encapsulant, thickness, bend radius, strain history, and temperature rise.

5 Exploratory Pilot Evidence Audit

5.1 Provenance

The pilot observations were generated during iterative, operator-led experimentation with a legacy detector coil plate, a small USB audio interface, and later a headphone-sized loudspeaker coil. Settings were changed adaptively, objects were often hand-held, the operator was not blinded, geometry was not fixed, and raw synchronized traces were not preserved as a controlled dataset. These conditions are useful for hypothesis generation but preclude inferential statistics, classifier accuracy, calibrated range, or causal attribution.

5.2 Observed phenomena

The stable claims are limited to what was directly noticed:

1. the receive signal changed strongly when a hand or body approached, with apparent response extending from tens of centimetres to approximately one metre under selected settings;
2. a ferrous pan produced a weaker but visible response;
3. wood and plastic did not produce an obvious response once hand proximity was separated from the object presentation;
4. hand and pan responses appeared similar when placed behind an approximately 5 cm wooden board;
5. lower audio frequencies, approximately 120 Hz to 1000 Hz, were qualitatively more useful; gated burst/PI-like operation appeared strongest, hybrid operation second, and continuous VLF weakest in the latest configuration; and
6. frequency, output level, sensitivity, and threshold settings affected the received display even when the physical audio output was disconnected or routed to the laptop loudspeakers.

5.3 Interpretation and competing hypotheses

The observations are compatible with at least five hypotheses, which are not mutually exclusive:

H1: inductive target perturbation. Conductive or magnetic targets change coil impedance or TX–RX coupling. This predicts frequency-, distance-, orientation-, conductivity-, and permeability-dependent response that survives galvanically isolated acquisition.

H2: capacitive body coupling. The operator/body changes electric-field coupling and system ground. This predicts a strong human response, sensitivity to grounding and cable routing, and persistence without a functioning TX coil.

H3: internal codec crosstalk. DAC activity couples into the ADC through silicon, supply, reference, or PCB paths. This predicts coherent RX changes with digital excitation even into an electrical dummy load or disconnected output.

H4: automatic audio processing. Gain control, echo cancellation, or suppression changes apparent amplitude as software parameters and acoustic output vary.

H5: mechanical/acoustic coupling. A coil or cable acts as a microphone; loudspeaker excitation or movement creates a correlated response.

The disconnected-output observation increases the plausibility of H2–H4 and prevents treating the pilot as evidence of remote material discrimination. Conversely, the different response to ferrous metal versus insulating controls justifies a controlled follow-up. The board experiment shows that the observed mechanism was not blocked by that board; it does not establish imaging or a general through-wall capability.

6 Prospective Validation Protocol

6.1 Status and hypotheses

This section is a *prospective protocol written after the exploratory observations and before a confirmatory dataset*. It is not an external registration and must receive a timestamped public registration before confirmatory acquisition. The primary hypothesis is that a leakage-controlled microcoil system achieves held-out-object macro- $F_1 \geq 0.75$ for three response classes (human/biological, metallic, non-conductive). Performance < 0.50 is a failure; $0.50 \leq F_1 < 0.75$ is inconclusive. The secondary hypothesis is a monotonically modelable 0 cm to 15 cm response with median absolute distance error ≤ 2 cm within target class. These thresholds are engineering goals, not current results.

6.2 Hardware and isolation controls

Use two acquisition configurations:

1. **Reference chain:** isolated waveform generator or DAC, current-limited TX driver, TX coil, separate RX coil, input clamp, differential low-noise preamplifier, anti-alias filter, and independent ADC.
2. **Commodity chain:** USB audio interface with identical coil geometry, retained to measure the penalty and leakage signature of the low-cost implementation.

The minimum controls are: (i) TX coil replaced by an equal electrical dummy load; (ii) RX coil replaced by a shielded resistor; (iii) physical TX disconnected; (iv) digitally silent output; (v) acoustic loudspeaker output with no TX coil; (vi) grounded and floating target fixtures; (vii) fixed cables; and (viii) a motion-matched empty fixture. Record TX current and RX voltage on independent channels wherever possible. Disable automatic gain, echo cancellation, and noise suppression.

6.3 Targets, geometry, and randomization

Use at least five held-out exemplars per class. Suggested metallic targets include steel, aluminium, copper, and stainless-steel coupons normalized by area and thickness. Non-conductive controls include dry wood, acrylic, polyethylene, glass, and silicone. Biological presentations may use the operator’s hand only after electrical safety review; saline phantoms with controlled conductivity provide a safer and more reproducible intermediate control. Objects are mounted on a non-conductive translation fixture at 0 cm, 2 cm, 5 cm, 10 cm and 15 cm, with 20 cm as an empty-field control. The operator remains at a fixed distance behind an electrostatic screen or leaves the acquisition zone.

Within each day and sensor bend state, randomize target identity, distance, orientation, excitation frequency (120 Hz, 250 Hz, 500 Hz and 1000 Hz), and mode. Acquire at least ten independent approaches per condition on three days. A trial is independent only if the target returns to the home position and a new baseline-stability test passes. Training, calibration, and held-out test objects are split by object identity, never by adjacent time windows from the same presentation.

6.4 Predefined exclusions and quality control

Exclude a trial only for: ADC clipping above 0.1% of samples; TX-current deviation above 5% from the set point; fixture position error above 1 mm; dropped frames or sample-rate discontinuity; baseline drift above three

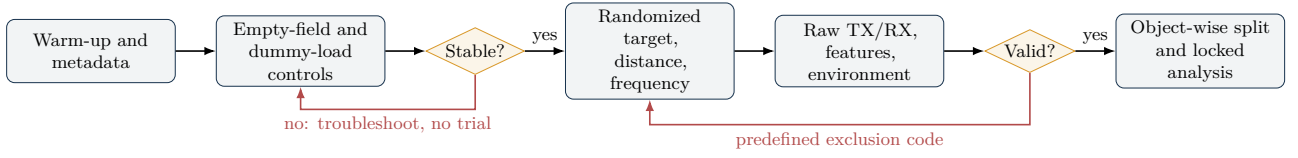


Figure 5: Prospective acquisition flow. Stability and validity rules are evaluated without viewing the target label.

pre-run standard deviations; or logged protocol violation. Report every exclusion by code and class. No threshold may be tuned on the test objects. A negative-control alarm occurs if the dummy-load condition can be classified above chance using the same pipeline; confirmatory claims are suspended until the leakage path is corrected.

6.5 Statistical analysis

All preprocessing is fitted on training data. Continuous features are robust-standardized using the training median and interquartile range. The transparent baseline is nearest centroid; regularized multinomial logistic regression is a secondary model. Hyperparameters are selected by grouped cross-validation, with group equal to physical target identity and acquisition day.

Report the confusion matrix, macro- F_1 , balanced accuracy, class sensitivity/specificity, calibration error, and 95% stratified bootstrap confidence intervals. Compare the locked classifier with label permutation (10,000 permutations). Distance is evaluated by mean and median absolute error, bias, monotonicity violations, and Bland–Altman limits. A mixed-effects model assesses mechanism:

$$z_{ijkl} = \beta_0 + \beta_1 \log d_i + \beta_2 f_j + \beta_3 c_k + \beta_4 m_l + (1|\text{object}) + (1|\text{day}) + \epsilon, \quad (7)$$

where d is distance, f frequency, c target class, and m acquisition mode. Interactions $f \times c$ and $\text{chain} \times c$ test whether spectral separation survives hardware isolation. Effect sizes and confidence intervals take priority over p -values.

6.6 Power and sample-size strategy

Because the pilot has no quantitative variance estimate, an honest numerical power calculation is not yet possible. Conduct a separate variance-estimation study whose observations are not reused for confirmatory testing. Then simulate the complete grouped design using the observed object/day covariance and choose sample size for at least 90% probability that the lower 95% confidence bound of macro- F_1 exceeds 0.50 when the true macro- F_1 is 0.75. Publish the simulation code and seed before the confirmatory run.

7 Expected Failure Modes and Mitigations

The most dangerous error is interpretive: a visually compelling waveform or image can be mistaken for an object “shape.” A single coil or single TX–RX pair does not contain sufficient independent spatial measurements for shape reconstruction. Tomographic imaging requires multiple known excitation/receive geometries, a forward model, regularized inversion, and phantom validation [Dingley et al., 2023]. The optional visual map in the demonstrator should therefore be labeled a time–feature history until an array and reconstruction model exist.

8 Discussion

8.1 What the pilot does and does not support

The pilot supports the narrow conclusion that the combined hardware/software chain is sensitive to nearby environmental changes. It does not identify which term in eq. (3) caused those changes. The especially strong human response and continued software-parameter dependence without a connected output are classic reasons to test capacitance and codec leakage first. The result may still be useful: a hybrid skin could intentionally exploit capacitive human proximity while using inductive channels for conductive/magnetic targets. Scientific value comes from separating these modalities, not assigning all changes to one mechanism.

The qualitative ranking of gated burst, hybrid, and continuous excitation is likewise provisional. A true conventional pulse-induction metal detector uses a high-current pulse, receiver protection, a blanking interval, and decay sampling after switch-off. A browser audio burst is band-limited, AC-coupled, and low voltage; it is more accurately described as *PI-like gated excitation*. Its apparent advantage may reflect improved baseline rejection or codec behavior rather than classical pulse-induction physics.

Table 2: Failure-mode and effects analysis for the proposed skin. Severity (S), occurrence (O), and detectability difficulty (D) are initial ordinal priorities from 1 (low) to 5 (high), not validated reliability statistics.

Failure mode	Observable consequence	consequence	S	O	D	Mitigation / verification
Codec or power-rail crosstalk	Signal persists with disconnected TX		3	4	2	Independent ADC/DAC supplies; dummy loads; coherence transfer test
Body capacitance / grounding	Human dominates all target classes		4	4	3	Electrostatic shield; fixed operator; saline phantom; ground-state factor
Coil deformation	Apparent change during bending	material	3	4	3	Strain sensor; per-bend calibration; mechanical neutral plane
RX saturation and recovery	Bars rail or pulse randomly		3	3	2	Clamp, blanking window, gain staging, saturation-aware feature mask
Thermal rise or insulation fault	Unsafe human contact / drift		5	2	2	Current limit, isolation, temperature monitor, dielectric test
Domain shift across objects	High accuracy, poor novel-object accuracy	training	4	4	3	Split by object; multi-day test; uncertainty rejection
Non-monotonic distance response	Unsafe proximity estimate		5	3	2	Monotonicity check; invalidate display; redundant proximity modality
Array mutual coupling	Spatial ghosts and channel interference		3	4	4	Sequential scan, calibration matrix, sparse inversion, shielding study

8.2 Path to a distributed robotic skin

Development should proceed from one characterized element to an array. First establish repeatability and a causal signal path with rigid fixtures. Then test encapsulation and bending, measure mutual-coupling matrices, and introduce sequential scanning. A skin cell may ultimately combine (i) a microcoil impedance channel, (ii) a capacitive proximity electrode, and (iii) an independent force element. Frequency diversity and sensor fusion can then be evaluated with uncertainty-aware models [Xu et al., 2023]. Energy, wiring, and local processing are decisive at robot scale; prior e-skin research shows that distributed coverage can impose substantial system costs [Garcia Nunez et al., 2019, Someya and Amagai, 2019].

For gentle contact, the 0 cm to 15 cm estimate must be a supervisory cue, not a safety-rated measurement. The robot should reduce velocity on conservative proximity thresholds and rely on certified force/torque limits, collision detection, and emergency stopping. No experiment in this paper authorizes direct human deployment.

8.3 Limitations

This study has five central limitations. First, there is no controlled raw pilot dataset. Second, the audio interface and coil electrical parameters were not fully characterized during the exploratory phase. Third, target geometry and operator position were not controlled. Fourth, the platform’s nearest-centroid model is a visualization aid, not a validated classifier. Fifth, browser scheduling and commodity audio processing limit metrological traceability. These limitations are made explicit so that future results can be judged against a fixed protocol rather than retrospective interpretation.

9 Open Science, Ethics, and Safety

The software, hardware notes, experimental protocol, and LaTeX source are maintained in the public project repository [Angulo de Lafuente, 2026]. A confirmatory release should add immutable raw PCM or losslessly encoded samples, TX-current traces, session metadata, target photographs/dimensions, calibration records, exclusion logs, and analysis scripts. Each figure derived from data should be generated from a versioned script and manifest.

Human-hand experiments constitute interaction with a person even when no identifying data are intended. Before formal study, obtain the applicable ethics determination or approval, informed consent, and a data-management plan. Electrical isolation, leakage current, surface temperature, insulation integrity, and fault

behavior must be independently reviewed. The system must never connect a power-amplifier output directly to a microphone input and must not serve as the sole protective measure in human–robot interaction.

10 Conclusion

Audio-frequency microcoils are a plausible research direction for compliant robotic skin, supported by a wider literature on inductive, magnetic, capacitive, and multimodal tactile systems. Sensory Skin Lab lowers the barrier to investigating that direction by offering local browser acquisition, transparent features, empirical calibration, and structured logging. Its exploratory pilot revealed reproducible-looking environmental sensitivity but also a decisive warning: response persisted when the physical output path was absent, leaving electronic and capacitive confounds unresolved. The appropriate next step is therefore not a stronger claim or amplifier, but a controlled causal experiment with isolated TX/RX chains, dummy loads, fixed geometry, randomized held-out targets, and locked analysis. Only after that test can proximity accuracy, material-response discrimination, array imaging, or safe robotic integration be responsibly claimed.

Author Contributions

Francisco Angulo de Lafuente: concept, exploratory investigation, system requirements, software validation, methodology, and manuscript review. The software and manuscript were developed with AI-assisted coding and drafting; the named author remains responsible for experimental accuracy, source verification, and all claims.

Data and Code Availability

No controlled dataset is associated with the exploratory observations. Source code and the prospective protocol are available at <https://github.com/Agnuxo1/sensory-skin-lab>. A future confirmatory dataset should receive a versioned archival DOI before results are reported.

Conflict of Interest

The author declares no known competing financial interest. This statement must be reconfirmed before submission.

Acknowledgments

No external funding is claimed. The author acknowledges the open research community whose cited work establishes the scientific context for flexible and robotic skins.

References

- Francisco Angulo de Lafuente. Sensory skin lab: Browser-based microcoil sensing research platform. Software repository, 2026. URL <https://github.com/Agnuxo1/sensory-skin-lab>. Accessed 2026-08-25.
- Raunaq Bhirangi, Tess Hellebrekers, Carmel Majidi, and Abhinav Gupta. ReSkin: Versatile, replaceable, lasting tactile skins. In *Proceedings of the 5th Conference on Robot Learning*, volume 164 of *Proceedings of Machine Learning Research*, pages 587–597, 2022. URL <https://proceedings.mlr.press/v164/bhirangi22a.html>.
- Raunaq Bhirangi, Venkatesh Pattabiraman, Enes Erciyes, Yifeng Cao, Tess Hellebrekers, and Lerrel Pinto. AnySkin: Plug-and-play skin sensing for robotic touch. *arXiv preprint arXiv:2409.08276*, 2024. doi: 10.48550/arXiv.2409.08276.
- Clement M. Boutry, Marlene Negre, Marc Jorda, Orestis Vardoulis, Alex Chortos, Oussama Khatib, and Zhenan Bao. A hierarchically patterned, bioinspired e-skin able to detect the direction of applied pressure for robotics. *Science Robotics*, 3(24):eaau6914, 2018. doi: 10.1126/scirobotics.aau6914.
- Sadaf Charkhabi, Yee Jher Chan, Subhanwit Roy, Md Monirul Islam, Brock B. Duffield, Kyle J. Jackson, Lujia Bu, Sang-Hwan Kim, Andrew C. Hillier, Nathan M. Neihart, and Nigel F. Reuel. Effects of fabrication materials and methods on flexible resonant sensor signal quality. *Extreme Mechanics Letters*, 41:101027, 2020. doi: 10.1016/j.eml.2020.101027.
- Alex Chortos, Jia Liu, and Zhenan Bao. Pursuing prosthetic electronic skin. *Nature Materials*, 15:937–950, 2016. doi: 10.1038/nmat4671.

- Ravinder S. Dahiya, Giorgio Metta, Maurizio Valle, and Giulio Sandini. Tactile sensing—from humans to humanoids. *IEEE Transactions on Robotics*, 26(1):1–20, 2010. doi: 10.1109/TRO.2009.2033627.
- Gavin Dingley, Mackenzie Cox, and Manuchehr Soleimani. EM-Skin: An artificial robotic skin using magnetic inductance tomography. *IEEE Transactions on Instrumentation and Measurement*, 72:1–9, 2023. doi: 10.1109/TIM.2023.3268481.
- Joao Fonseca, Mohammad Safeea, and Pedro Neto. A flexible piezoresistive/self-capacitive hybrid force and proximity sensor to interface collaborative robots. *IEEE Transactions on Industrial Informatics*, 19(3): 3208–3218, 2023. doi: 10.1109/TII.2022.3174708.
- Carlos Garcia Nunez, Libu Manjakkal, and Ravinder Dahiya. Energy autonomous electronic skin. *npj Flexible Electronics*, 3(1):1, 2019. doi: 10.1038/s41528-018-0045-x.
- Mallory L. Hammock, Alex Chortos, Benjamin C.-K. Tee, Jeffrey B.-H. Tok, and Zhenan Bao. The evolution of electronic skin (E-skin): A brief history, design considerations, and recent progress. *Advanced Materials*, 25(42):5997–6038, 2013. doi: 10.1002/adma.201302240.
- Y. Kim, A. Chortos, W. Xu, Y. Liu, J. Y. Oh, D. Son, J. Kang, A. M. Foudeh, C. Zhu, Y. Lee, S. Niu, J. Liu, R. Pfattner, Z. Bao, and T.-W. Lee. A bioinspired flexible organic artificial afferent nerve. *Science*, 360(6392): 998–1003, 2018. doi: 10.1126/science.aao0098.
- Perla Maiolino, Marco Maggiali, Giorgio Cannata, Giorgio Metta, and Lorenzo Natale. A flexible and robust large scale capacitive tactile system for robots. *IEEE Sensors Journal*, 13(10):3910–3917, 2013. doi: 10.1109/JSEN.2013.2258149.
- Stefan C. B. Mannsfeld, Benjamin C.-K. Tee, Randall M. Stoltenberg, Christopher V. H.-H. Chen, Soumendra Barman, Beinn V. O. Muir, Anatoliy N. Sokolov, Colin Reese, and Zhenan Bao. Highly sensitive flexible pressure sensors with microstructured rubber dielectric layers. *Nature Materials*, 9:859–864, 2010. doi: 10.1038/nmat2834.
- Philipp Mittendorfer and Gordon Cheng. Humanoid multimodal tactile-sensing modules. *IEEE Transactions on Robotics*, 27(3):401–410, 2011. doi: 10.1109/TRO.2011.2106330.
- Thi-Phuong Nguyen and Nae-Eung Lee. Recent development of flexible tactile sensors and their applications. *Sensors*, 22(1):50, 2022. doi: 10.3390/s22010050.
- Guanglong Pang, Gao Yang, Wenhao Heng, Zhen Ye, Xiaoyan Huang, H. Y. Yang, and Zhibo Pang. Development of flexible robot skin for safe and natural human–robot collaboration. *Micromachines*, 9(11):576, 2018. doi: 10.3390/mi9110576.
- Yulian Peng, Houping Wu, Zhengyan Wang, Yufeng Wang, and Hongbo Wang. A soft inductive bimodal sensor for proprioception and tactile sensing of soft machines. *Soft Robotics*, 11(6):1055–1067, 2024. doi: 10.1089/soro.2023.0249.
- Patrick Roberts, Mariam Zadan, and Carmel Majidi. Soft tactile sensing skins for robotics. *Current Robotics Reports*, 2:343–354, 2021. doi: 10.1007/s43154-021-00065-2.
- Takao Someya and Masayuki Amagai. Toward a new generation of smart skins. *Nature Biotechnology*, 37: 382–388, 2019. doi: 10.1038/s41587-019-0079-1.
- Takao Someya, Tsuyoshi Sekitani, Shingo Iba, Yusaku Kato, Hiroshi Kawaguchi, and Takayasu Sakurai. A large-area, flexible pressure sensor matrix with organic field-effect transistors for artificial skin applications. *Proceedings of the National Academy of Sciences*, 101(27):9966–9970, 2004. doi: 10.1073/pnas.0401918101.
- Benjamin C.-K. Tee, Alex Chortos, Alexander Berndt, Amanda K. Nguyen, Ari Tom, Anna McGuire, Ziliang C. Lin, Kevin Tien, Won-Gyu Bae, Huiliang Wang, Ping Mei, Huiliang Chou, Bao Cui, Karl Deisseroth, Tse Nga Ng, and Zhenan Bao. A skin-inspired organic digital mechanoreceptor. *Science*, 350(6258):313–316, 2015. doi: 10.1126/science.aaa9306.
- Bingwei Wu, Ting Jiang, Zhongxiang Yu, Qihui Zhou, Jian Jiao, and Ming Liang Jin. Proximity sensing electronic skin: Principles, characteristics, and applications. *Advanced Science*, 11(13):e2308560, 2024. doi: 10.1002/advs.202308560.
- Kun Xu, Samuel Solomon, and Wei Gao. Artificial intelligence-powered electronic skin. *Nature Machine Intelligence*, 5:1344–1355, 2023. doi: 10.1038/s42256-023-00760-z.

Youcan Yan, Zhe Hu, Zhengbao Yang, Wenzhen Yuan, Chaoyang Song, Jia Pan, and Yajing Shen. Soft magnetic skin for super-resolution tactile sensing with force self-decoupling. *Science Robotics*, 6(51):eabc8801, 2021. doi: 10.1126/scirobotics.abc8801.

A Minimum Session Metadata

Every exported session should contain: UTC timestamp; software commit; browser and operating system; input/output device labels and channel mapping; requested and realized sample rate; disabled/enabled audio enhancements; coil identifier and measured R , L , and self-resonant frequency; TX waveform, frequency, duty cycle, and measured current; preamplifier gain and filters; fixture distance/orientation; target identifier, class, material, dimensions, and temperature; room temperature/humidity; operator location; grounding state; baseline quality; clipping fraction; exclusion code; and randomized trial index.

B Prospective Analysis Pseudocode

1. Verify file hashes and metadata schema; retain a read-only raw directory.
2. Apply only preregistered validity rules; export the exclusion ledger.
3. Split by physical object and day before fitting preprocessing.
4. Fit robust scaling and the nearest-centroid baseline on training folds.
5. Freeze parameters; evaluate exactly once on held-out objects.
6. Bootstrap at the object level, not the audio-frame level.
7. Run label permutation and dummy-load leakage tests.
8. Generate figures and tables from the locked result bundle.
9. Report all planned endpoints, including null and adverse results.

C Claim-Evidence Matrix

Table 3: Permitted wording by evidence level.

Level	Permitted statement	Prohibited substitution
Exploratory observation	“The displayed receive metric changed when a hand approached.”	“The coil detected a human at one metre.”
Controlled mechanism	“The isolated RX response differed from dummy-load controls.”	“The mechanism is uniquely inductive” without modal controls.
Held-out classification	“Macro- F_1 was x [CI] on unseen objects.”	Training accuracy or frame-wise random splits.
Calibrated proximity	“Median error was x cm over 0–15 cm for specified targets.”	Universal distance range.
Safety evidence	“The sensor contributed to a validated safety architecture.”	“Safe for human contact” from sensing accuracy alone.