



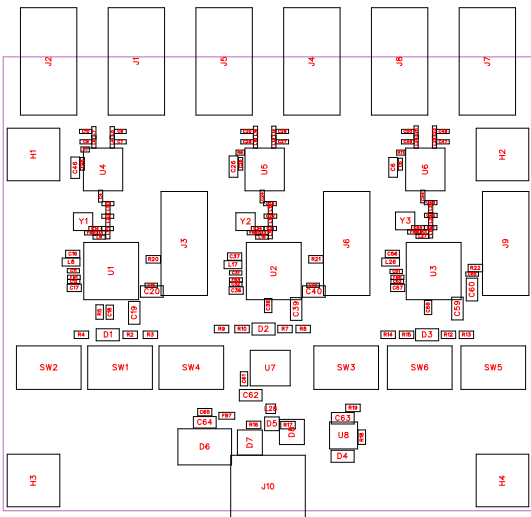



No.	Quantity	Comment	Designator	Footprint	Value	Manufacturer Part	Manufacturer	Supplier Part	Supplier
1	3	1.2pF	C1,C21,C41	nRF54LM20 A:DK_C_020 1_0603Metric	1.2pF				
2	3	1.5pF	C2,C22,C42	nRF54LM20 A:DK_C_020 1_0603Metric	1.2pF				
3	3	0.3pF	C3,C23,C43	nRF54LM20 A:DK_C_020 1_0603Metric	1.2pF				
4	12	1.0pF	C4,C8,C10,C13,C24,C28,C30,C33,C44,C48,C50,C53	nRF54LM20 A:DK_C_020 1_0603Metric	1.2pF				
5	3	100nF	C5,C25,C45	nRF54LM20 A:DK_C_020 1_0603Metric	1.2pF				
6	3	10uF	C6,C26,C46	nRF54LM20 A:DK_C_040 2_1005Metric	10uF				
7	6	2.0pF	C7,C9,C27,C29,C47,C49	nRF54LM20 A:DK_C_020 1_0603Metric	1.2pF				
8	3	4.7uF	C11,C31,C51	nRF54LM20 A:DK_C_020 1_0603Metric	1.2pF				
9	9	2.2uF	C12,C14,C15,C32,C34,C35,C52,C54,C55	nRF54LM20 A:DK_C_020 1_0603Metric	1.2pF				
10	10	100nF	C16,C17,C18,C36,C37,C38,C56,C57,C58,C65	Capacitor_S MD:C_0402_1005Metric	100nF				
11	4	10uF	C19,C39,C59,C63	Capacitor_S MD:C_0603_1608Metric	10uF				
12	3	4.7uF	C20,C40,C60	Capacitor_S MD:C_0603_1608Metric	10uF				
13	1	1uF	C61	Capacitor_S MD:C_0402_1005Metric	100nF				
14	2	1uF	C62,C64	Capacitor_S MD:C_0603_1608Metric	10uF				
15	3	GREEN	D1,D2,D3	LED_SMD:L ED_0603_1608Metric	GREEN				
16	1	PWR	D4	LED_SMD:L ED_0603_1608Metric	GREEN				

17	1	PRTR5V0U2F	D5	nordic:SON50P100X50-6N	PRTR5V0U2F				
18	1	SMAJ5.0A	D6	Diode_SMD:D_SMA	SMAJ5.0A				
19	2	PESD5V0S1BA	D7,D8	Diode_SMD:D_SOD-323	PESD5V0S1BA				
20	3	120R	FB1,FB3,FB5	nRF54LM20A:DK_L_0201_0603Metric	3.6nH				
21	3	15nH	FB2,FB4,FB6	nRF54LM20A:DK_L_0201_0603Metric	3.6nH				
22	1	120R/3A	FB7	nordic:INDC1608X06L	120R/3A				
23	4	M3	H1,H2,H3,H4	MountingHole_3.2mm_M3					
24	6	osd_COAX_SMA	J1,J2,J4,J5,J7,J8	nordic:SMA_RA_TH_Taoglas	PCB.SMAFRA.HT				
25	1	SWD+ETMch37	J3	Connector_PinHeader_2.54mm:PinHeader_2x05_P2.54mm_Vertical	SWD+ETMch37				
26	1	SWD+ETMch38	J6	Connector_PinHeader_2.54mm:PinHeader_2x05_P2.54mm_Vertical	SWD+ETMch37				
27	1	SWD+ETMch39	J9	Connector_PinHeader_2.54mm:PinHeader_2x05_P2.54mm_Vertical	SWD+ETMch37				
28	1	USB-C	J10	ext:USB-C_SMD-TYPE-C-31-M-12_1	USB-C				
29	3	3.6nH	L1,L10,L19	nRF54LM20A:DK_L_0201_0603Metric	3.6nH				
30	3	4.7nH	L2,L11,L20	nRF54LM20A:DK_L_0201_0603Metric	3.6nH				
31	3	3.3nH	L3,L12,L21	nRF54LM20A:DK_L_0201_0603Metric	3.6nH				

32	6	1.9nH	L4,L6,L13,L15,L22,L24	nRF54LM20 A:DK_L_020 1_0603Metric	3.6nH				
33	6	3.0nH	L5,L7,L14,L16,L23,L25	nRF54LM20 A:DK_L_020 1_0603Metric	3.6nH				
34	3	4.7uH	L8,L17,L26	nRF54LM20 A:DK_L_060 3_1608Metric	4.7uH				
35	3	1.0nH	L9,L18,L27	nRF54LM20 A:DK_L_020 1_0603Metric	3.6nH				
36	1	DLM0NSM90 0HY2D	L28	nordic:CMC0 806X05N	DLM0NSM90 0HY2D				
37	3	33k	R1,R6,R11	nRF54LM20 A:DK_R_020 1_0603Metric	33k				
38	4	1k	R2,R7,R12,R18	Resistor_SM D:R_0402_1 005Metric	1k				
39	9	10k	R3,R4,R5,R8,R9,R10,R13, R14,R15	Resistor_SM D:R_0402_1 005Metric	1k				
40	2	5.1k	R16,R17	Resistor_SM D:R_0402_1 005Metric	1k				
41	1	4.7k	R19	Resistor_SM D:R_0402_1 005Metric	1k				
42	3	200R	R20,R21,R22	Resistor_SM D:R_0402_1 005Metric	1k				
43	3	BOOT	SW1,SW3,SW5	Button_Switch_SMD:SW SPST_SKQG _WithoutSte m	BOOT				
44	3	RESET	SW2,SW4,SW6	Button_Switch_SMD:SW SPST_SKQG _WithoutSte m	BOOT				
45	1	nRF54LM20 A ch37	U1	nRF54LM20 A:nRF54LM2 0A_QFN52 6x6mm_P0.4 mm_EP4.7x4 .7mm	nRF54LM20 A ch37				

46	1	nRF54LM20 A ch38	U2	nRF54LM20 A:nRF54LM2 0A_QFN52_ 6x6mm_P0.4 mm_EP4.7x4 .7mm	nRF54LM20 A ch37				
47	1	nRF54LM20 A ch39	U3	nRF54LM20 A:nRF54LM2 0A_QFN52_ 6x6mm_P0.4 mm_EP4.7x4 .7mm	nRF54LM20 A ch37				
48	3	nRF21540-Q DAA	U4,U5,U6	nRF54LM20 A:nRF21540 _QFN16_4x4 mm_P0.65m m_EP2.65	nRF21540-Q DAA				
49	1	CH334F	U7	ext:QFN-24_ L4.0-W4.0-P 0.50-BL-EP2. 8	CH334F				
50	1	AP2112K-3.3	U8	ext:SOT-25-5 _L2.9-W1.6- P0.95-LS2.8- BL	AP2112K-3.3				
51	3	32MHz	Y1,Y2,Y3	nRF54LM20 A:DK_Crystal _32MHz	32MHz				

