

Components Format: THT

Internal Modules:

- MCU (ESP32-S3)
- XL4005 (Voltage Regulator – Step Down)
- Voltage Sensor (power supply voltage)
- HW-519 (RS-485)
- RGB LED

External Modules:

- BME-280 (I2C port)
  - Air Temperature (°C)
  - Air Humidity (%)
  - Atmospheric Pressure (mmHg)
- Pluviometer (pulse port)
  - Rain Amount (mm)
- Anemometer (pulse port)
  - Wind Speed (m/sec. or Km/h)
- Windsock (ADC port)
  - Wind Direction (N, NE, E, SE, S, SW, W, NW)
- ADC 4mA – 20mA (4x ports)
- Soil Sensor (RS-485 port)
  - Temperature (°C)
  - Moisture (%)
  - PH (index)
  - Conductivity (µs/cm)
  - Nitrogen (mg/Kg)
  - Potassium (mg/Kg)
  - Calcium (mg/Kg)

## BME280

Air Temperature: -40°C ~ 85°C (0.01°C / ±1°C)  
Air Humidity: 0% ~ 100% (0.008% / ±3%)  
Atmospheric Pressure: 300hPa ~ 1100hPa (0.18hPa / ±1hPa)  
I2C Addr: 0x76 (SDO Low)  
          0x77 (SDO High)

## DS18B20

Soil Temperature:  $-55^{\circ}\text{C} \sim 125^{\circ}\text{C}$  ( $0,01^{\circ}\text{C} / \pm 0,5^{\circ}\text{C}$ )  
Resolution: 9 ~ 12 (adjustable)

## Power Supply



MCU



## Analog Inputs



## Terminals



RS-485



LTE



Total Supply Current: ??mA (??mA)

Author: Robson Costa (robson.costa@ifsc.edu.br)

Confidential (access prohibited without signing a non-disclosure agreement)

IFSC/Lages (Instituto Federal de Santa Catarina)

**AgroTechLab (Laboratório de Desenvolvimento de Tecnologias para o Agronegócio)**

Sheet: /

File: atl100\_tht.kicad\_sch

**Title: ATL100 (Multiparametric Station) – THT Based**


Size: A4

Date: 2025-01-14

Rev: v0.1.0


SIZE: A1	
KiCad E.D.A. 8.0.8	

Id: 1/7

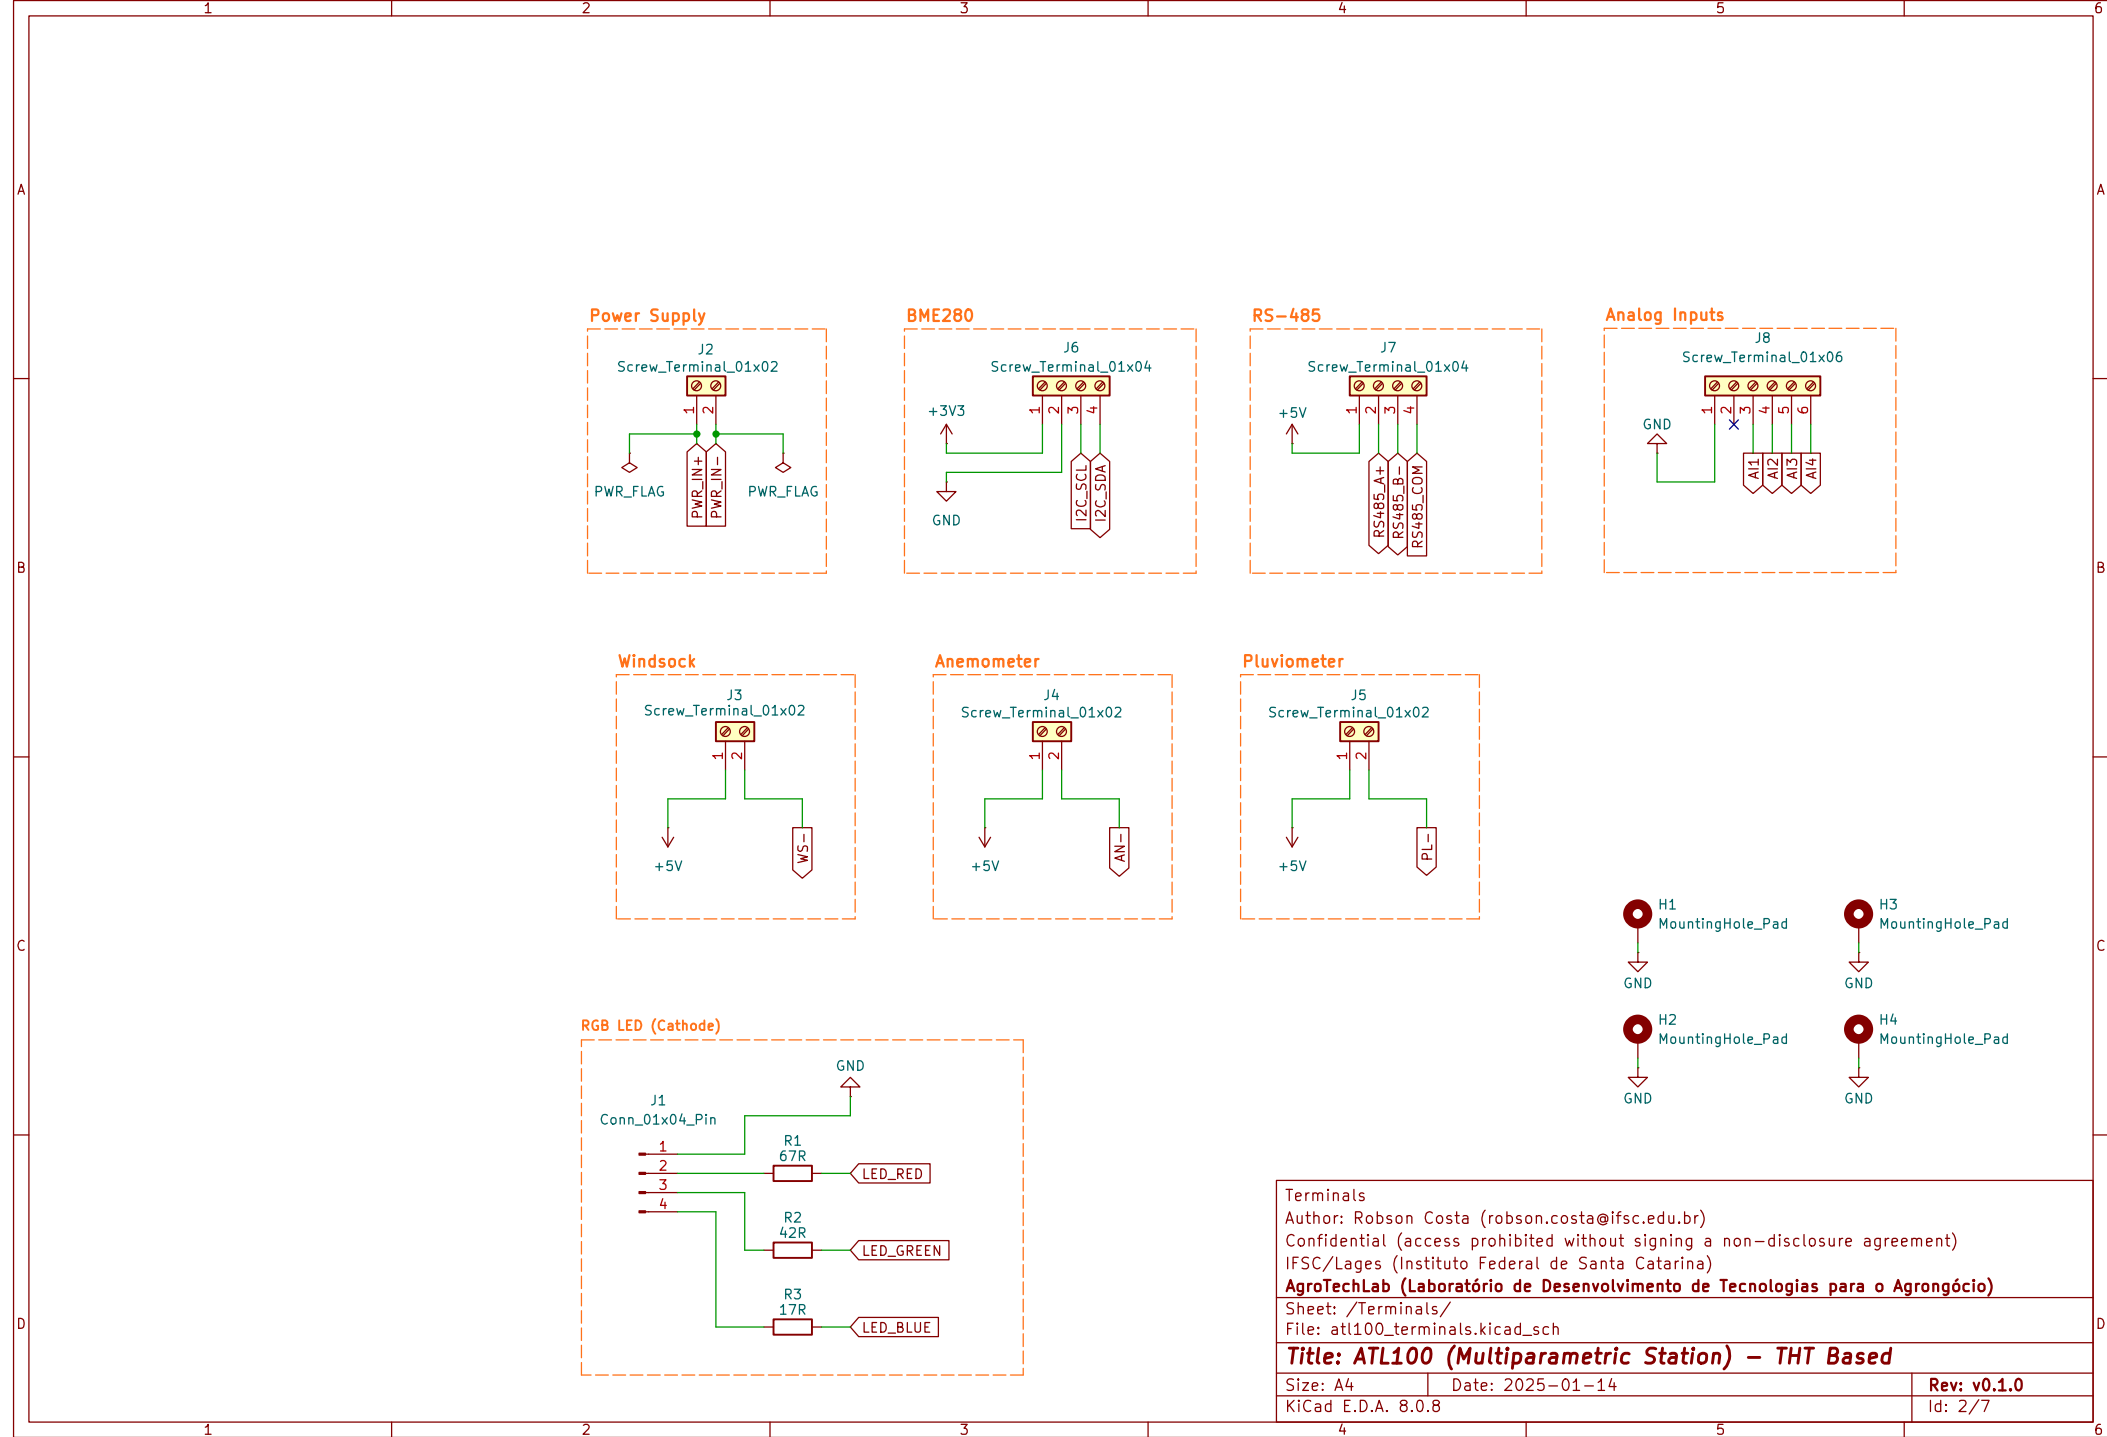


**Power Supply**  
Input: +5V ~ +30V (DC)  
Output: +0.8V ~ +24V (DC) – adjustable  
Current: +2.5A / +5A (with heat sink)  
Conversion efficiency: >90%  
Switching Frequency: 300kHz  
Maximum Output Power: 80W  
Maximum Voltage Fluctuation: ±30mV

XL4005 Module

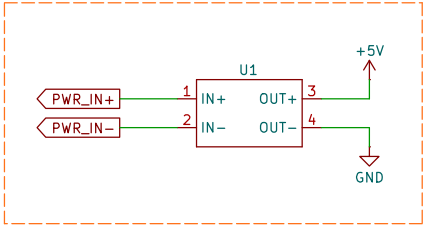

Voltage Sensor

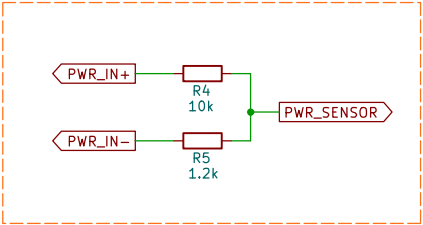


Power Supply (Max. Supply Current: 2.5 A)  
Author: Robson Costa (robson.costa@ifsc.edu.br)  
Confidential (access prohibited without signing a non-disclosure agreement)  
IFSC/Lages (Instituto Federal de Santa Catarina)  
**AgroTechLab (Laboratório de Desenvolvimento de Tecnologias para o Agronegócio)**


Sheet: /Power Supply/  
File: atl100\_power\_supply.kicad\_sch

**Title: ATL100 (Multiparametric Station) – THT Based**



Size: A4	Date: 2025-01-14	Rev: v0.1.0
KiCad E.D.A. 8.0.8		Id: 3/7

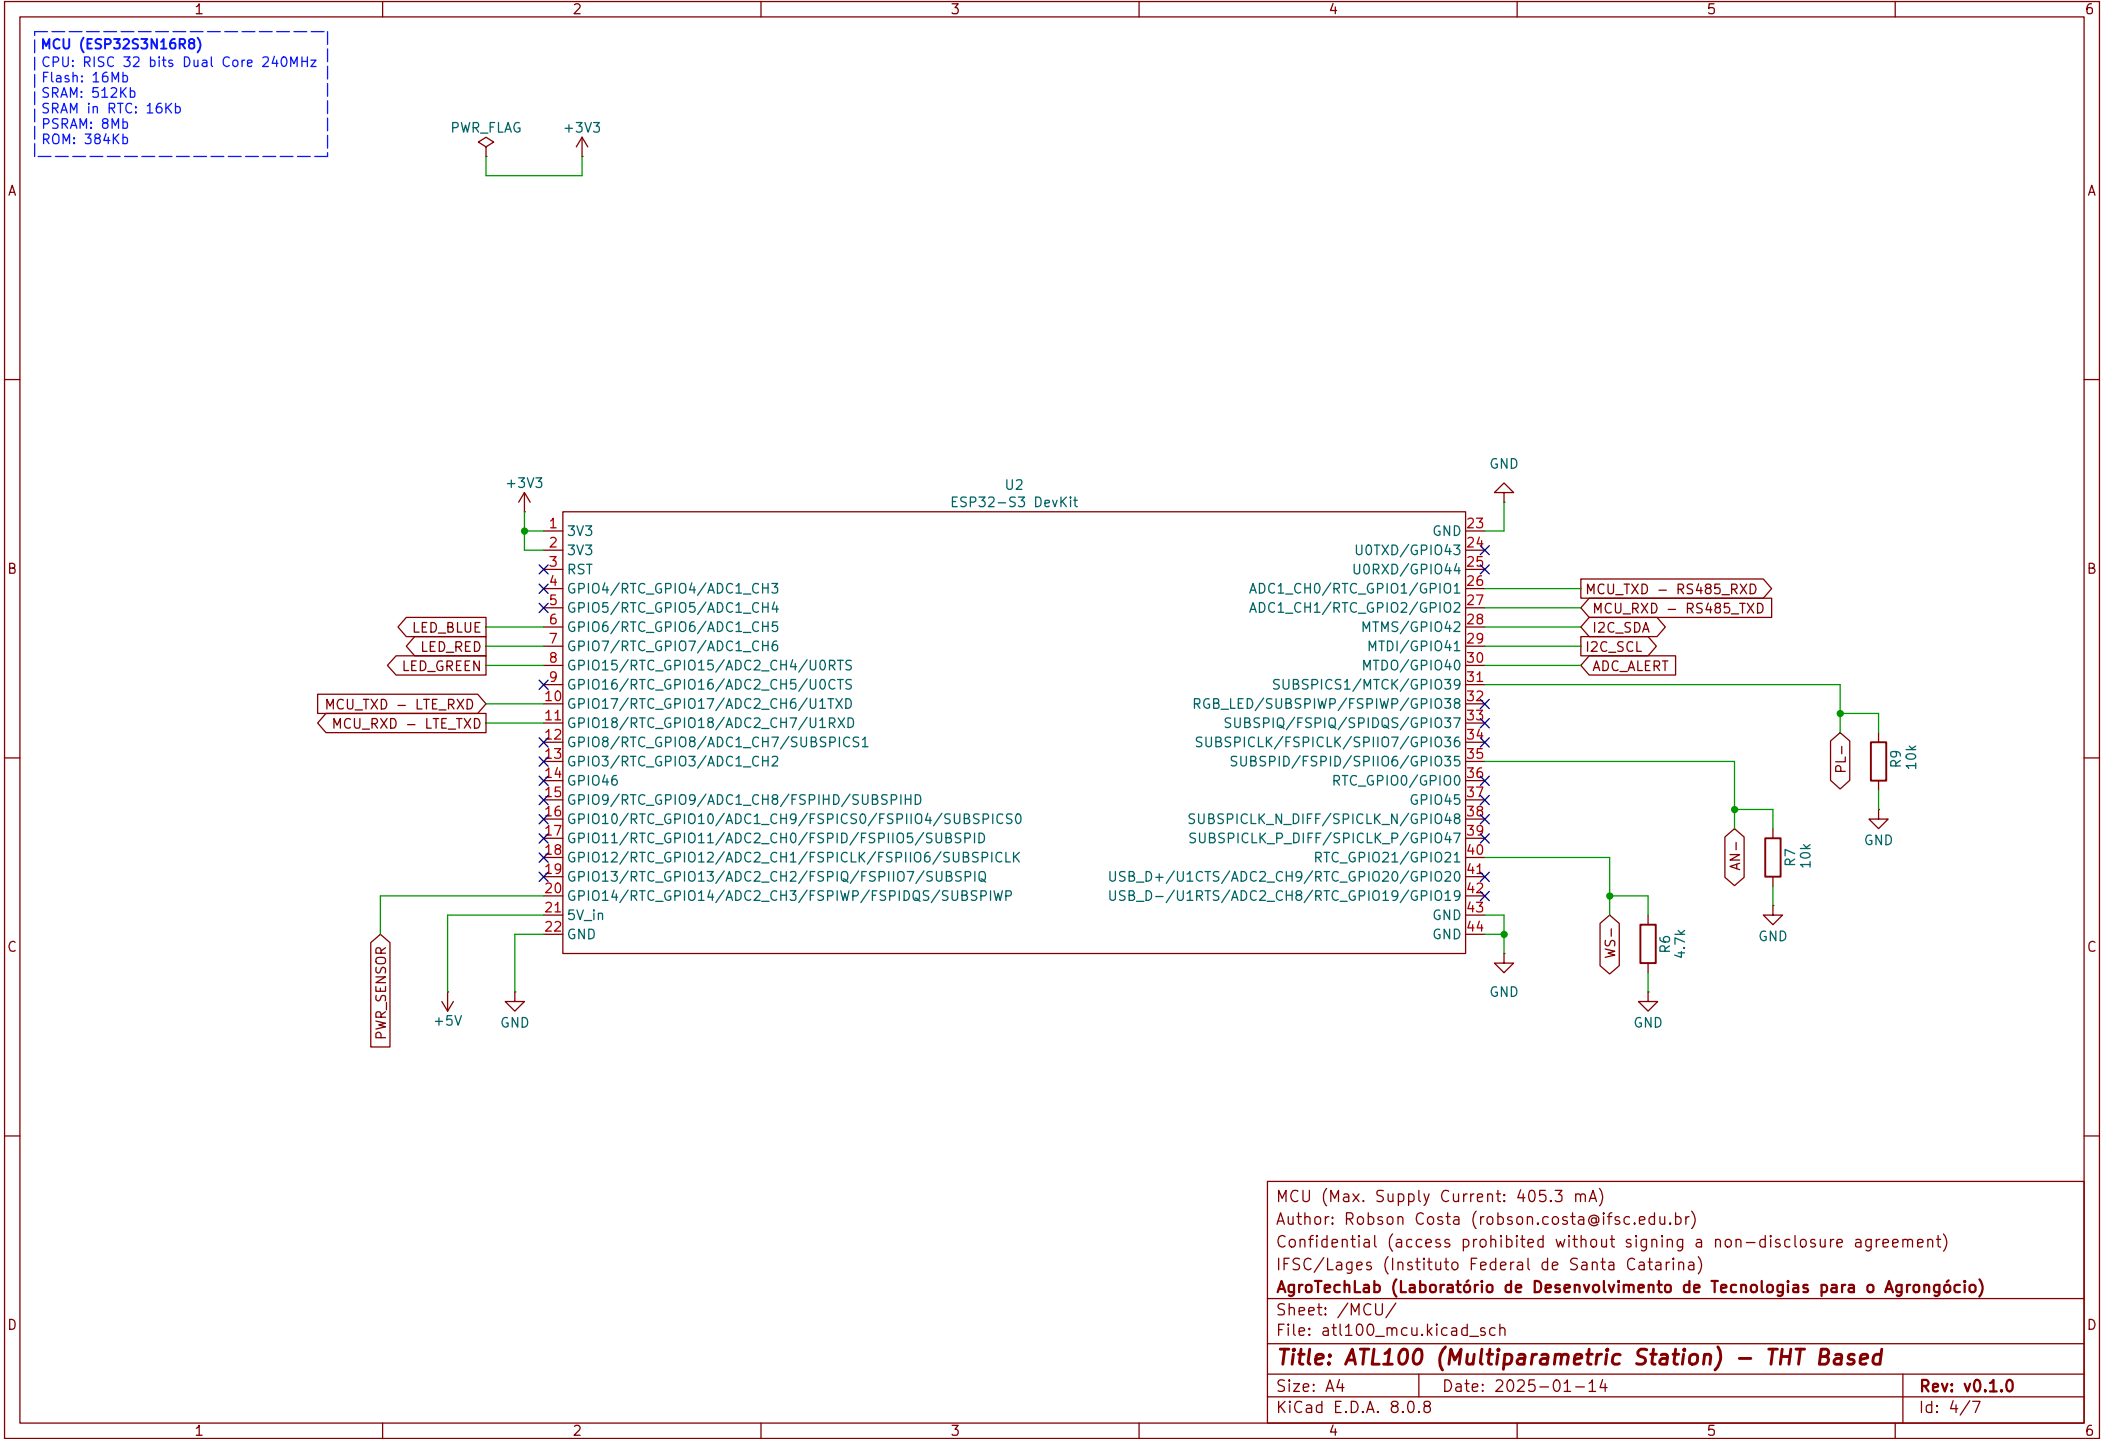

RS-485 (HW-519)  
Mode: Half-Duplex  
Protection: Thermal Fuse  
Noise Reduction: Transient Suppressor Diodes

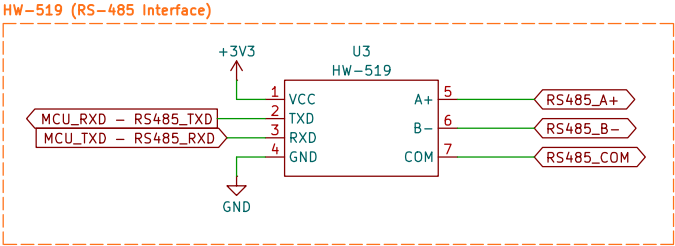

RS-485		
Author: Robson Costa (robson.costa@ifsc.edu.br)		
Confidential (access prohibited without signing a non-disclosure agreement)		
IFSC/Lages (Instituto Federal de Santa Catarina)		
AgroTechLab (Laboratório de Desenvolvimento de Tecnologias para o Agronegócio)		
Sheet: /RS-485/		
File: atl100_rs485.kicad_sch		
Title: ATL100 (Multiparametric Station) – THT Based		
Size: A4	Date: 2025-01-14	Rev: v0.1.0
KiCad E.D.A. 8.0.8		Id: 5/7

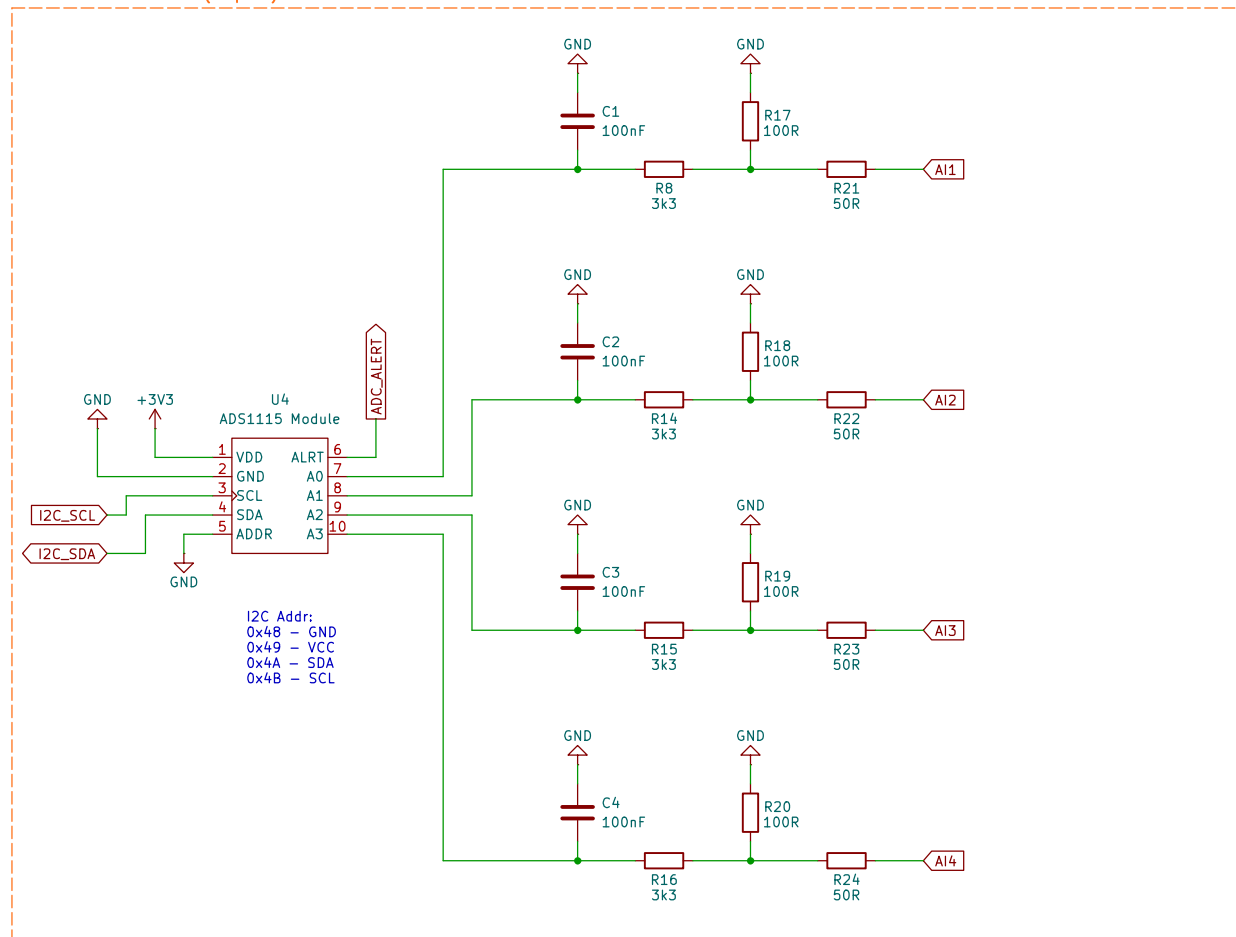

Id: 6/7


LTE Module (SIM7070G)

Mode: Half-Duplex

Protection: Thermal Fuse

Noise Reduction: Transient Suppressor Diodes

SIM7070G Module

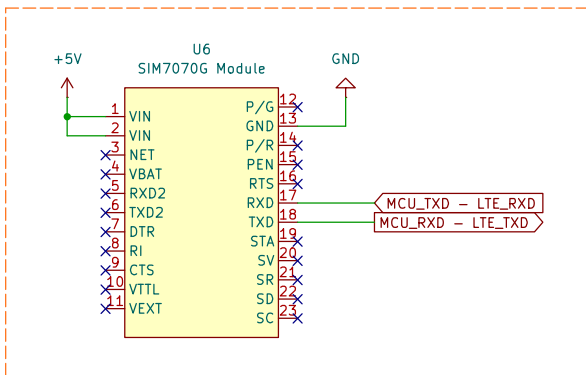

LTE Module (SIM7070G)

Author: Robson Costa (robson.costa@ifsc.edu.br)

Confidential (access prohibited without signing a non-disclosure agreement)

IFSC/Lages (Instituto Federal de Santa Catarina)

**AgroTechLab (Laboratório de Desenvolvimento de Tecnologias para o Agronegócio)**

Sheet: /LTE/

File: atl100\_lte.kicad\_sch

**Title: ATL100 (Multiparametric Station) – THT Based**

Size: A4

Date: 2025-01-14

Rev: v0.1.0

KiCad E.D.A. 8.0.8

Id: 7/7