

How to flash firmware for SV02 touch screen.

Prepare the display

Dismount the display from the printer and remove the cable

Remove the 4 screws from the frame

Remove the 4 screws that hold the print board

Take the display out of its casing

Connect the display to its cable again

Format a SD card (≤ 16GB)

In Windows start a CMD shell:

Windows 7:

Windows button ☐ Run ☐ cmd

Windows 10

Windows button ☐ just type cmd and press the enter key

In the cmd window type (replace x with the letter of your SD card)

format /q x: /fs:fat32 /a:4096

and press the enter key (and again if it asks)

```
Administrator: Command Prompt
Microsoft Windows [Version 10.0.19041.630]
(c) 2020 Microsoft Corporation. All rights reserved.


C:\WINDOWS\system32>format h: /q /fs:fat32 /a:4096
Insert new disk for drive H:
and press ENTER when ready...
The type of the file system is FAT32.
QuickFormatting 7.4 GB
Initializing the File Allocation Table (FAT)...
Volume label (11 characters, ENTER for none)?
Format complete.
   7.4 GB total disk space.
   7.4 GB are available.

   4,096 bytes in each allocation unit.
 1,945,087 allocation units available on disk.

   32 bits in each FAT entry.


Volume Serial Number is 300F-2DD4
```

Extract the downloaded update files (RAR archive – with 1-zip for example)

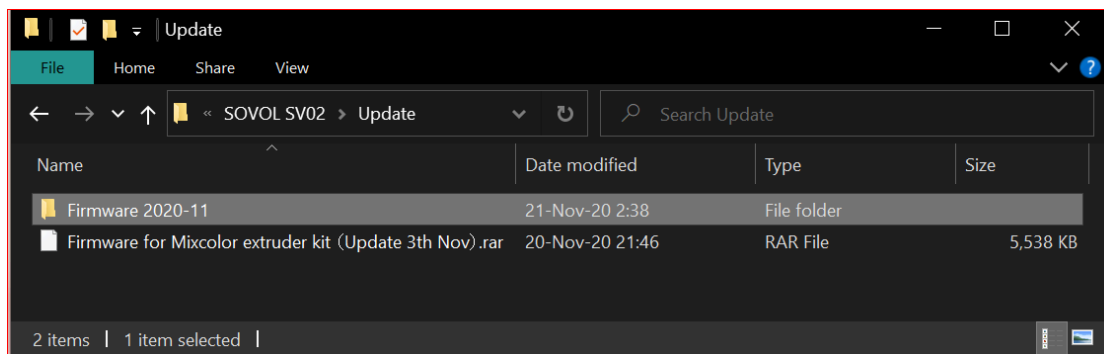

I extracted the archive “Firmware for Mixcolor extruder kit (Update 3th Nov) .rar” to the directory “Firmware 2020-11”

Copy the DWIN_SET folder to the SD card (in my case its inside the “Firmware 2020-11” folder)

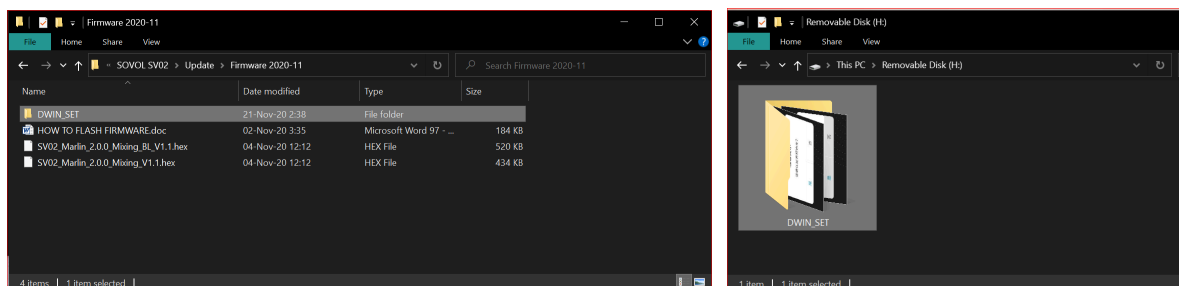

Remove the card from the PC and insert it in the card reader of the display
Switch the printer on and wait until the upgrade is finished.

Switch the printer off and remove the SD card from the display
Re-assemble the display in the opposite Order

How to flash firmware for SV02 mainboard?

Open Cura> update firmware> Import
install bl touch.

 SV02_Marlin_2.0.0_V1.2.hex

if you didn't

If you installed bl touch, import

 SV02_Marlin_2.0.0_V1.2.hex



```
SD Card Process... END ↑
Download .CFG Files: 0001

Download Code Files: 0002
Download .LIB Files: 0000
Download .H2K Files: 0001
Download .BIN Files: 0003
Download .D2K Files: 0000
Download .ICD Files: 0002
Download .M90 Files: 0003
Download .BMP Files: 0123
```

Video guide: <https://youtu.be/-ZV8r0Z8yig>