

Noise reduction on fixed trajectories: replicate 6, $P=4$

Same four signals, 200 true positions, and standard-normal errors at every level

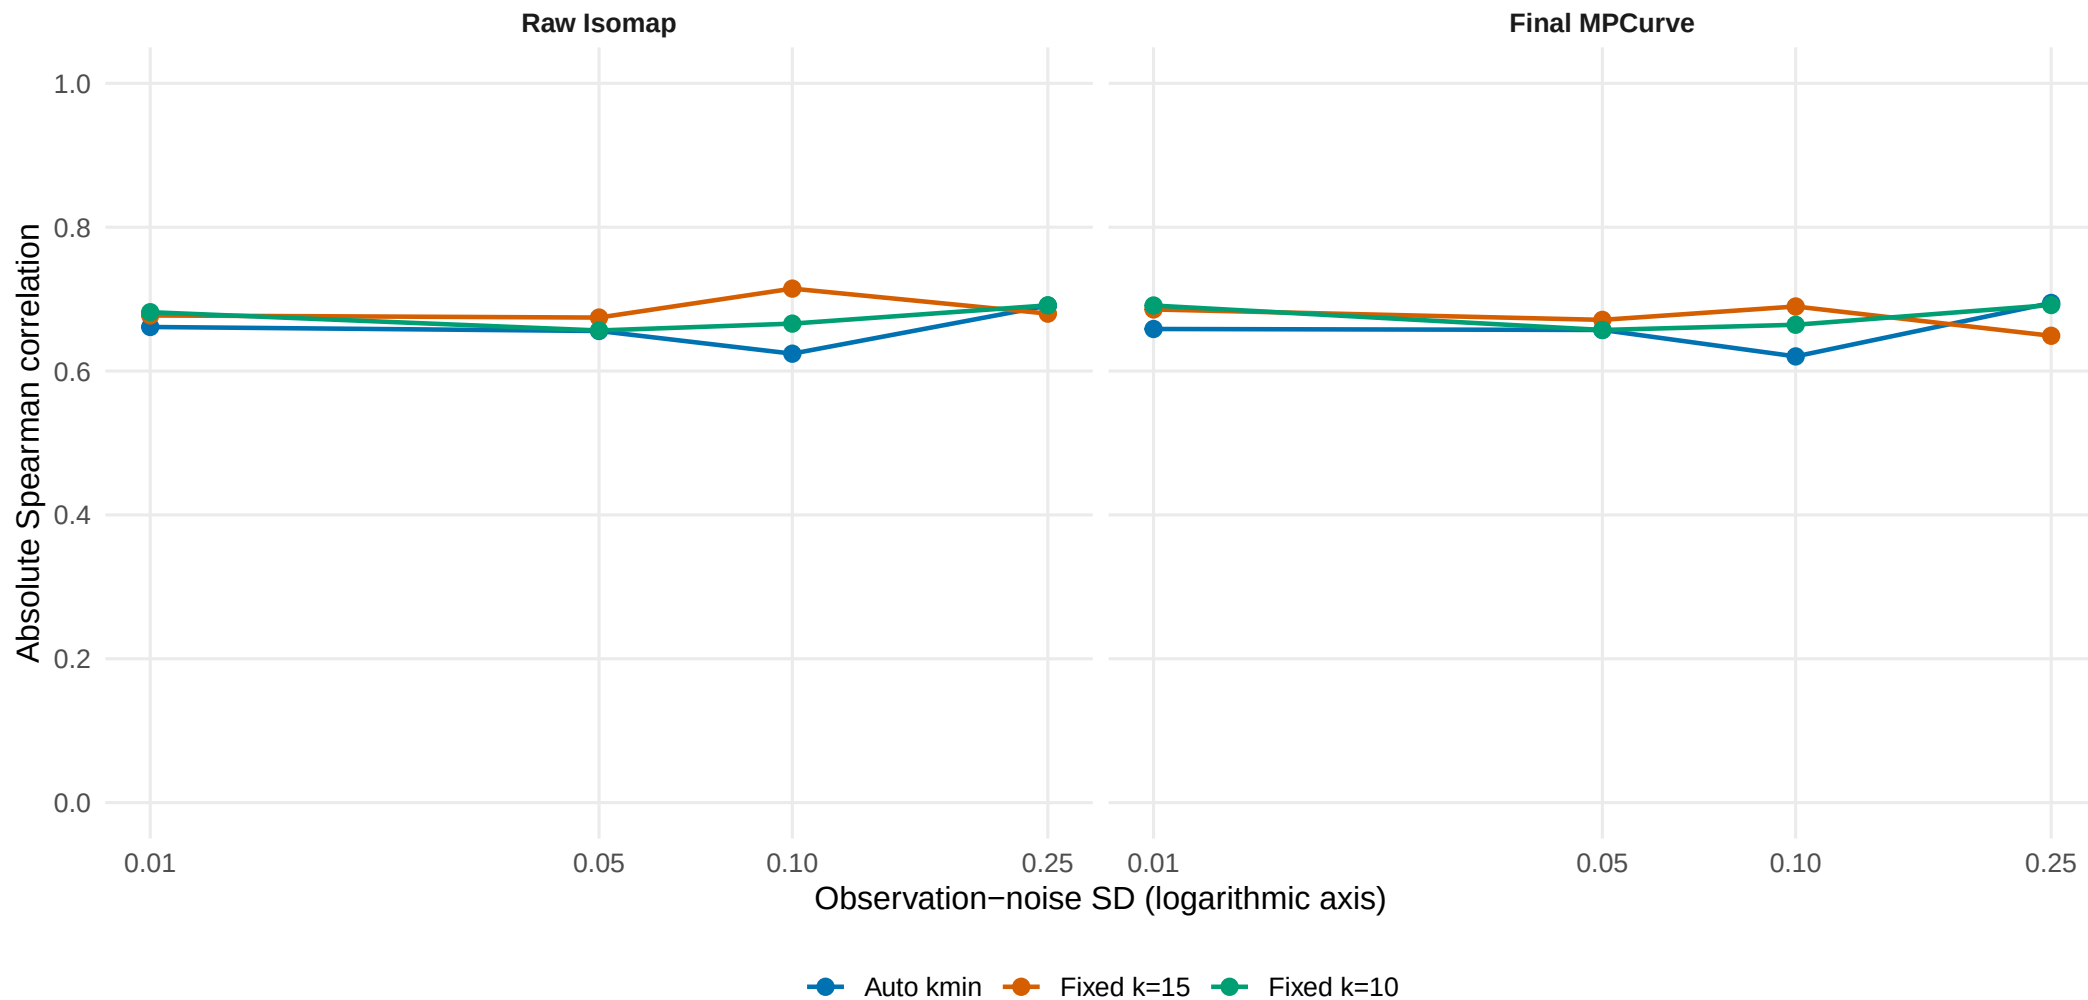


Figure 1. Raw Isomap and final MPCurve recovery at $SD=0.25, 0.10, 0.05$, and 0.01 . Only error amplitude changes. Absolute Spearman allows global reversal. The original $SD=0.25$ fits are reused; all reduced-noise settings use the same frozen package and fitting controls. One fixed case; no uncertainty intervals.