Anti-Symphony

Your Apogee Symphony I/O Mk1, working again on modern macOS, with **Symphony Control**: monitoring, headphone mixes, routing, calibration and input processing.



Free and open source · github.com/BigDumbRobot/Anti-Symphony

Not made or endorsed by Apogee. Apogee and Symphony are Apogee Electronics' trademarks.

From Canada with love

GETTING STARTED

Install in one step

Apogee's software no longer runs on macOS Tahoe, so the Symphony sits with a "!" on its front panel. Anti-Symphony tells the box the Mac is ready, makes it a normal audio device again, and replaces Maestro.

What you need

An Apogee Symphony I/O Mk1 on USB, a Mac with macOS 14 (Sonoma) or later (tested on macOS 26 Tahoe, Apple silicon), and an internet connection. No admin password, no kernel extension.

Install

1. Open **Terminal** (Applications → Utilities → Terminal).
2. Paste this line and press **Return**:

```
curl -fsSL https://raw.githubusercontent.com/BigDumbRobot/Anti-Symphony/main/install.sh | bash
```

3. If a window asks to install Apple's **Command Line Tools**, click **Install** and accept. They're free, about 1 GB, and the installer waits for them, then carries on by itself.
4. Wait a minute or two while it builds. When it says **Anti-Symphony is installed**, Symphony Control opens.
5. Power on the Symphony. The "!" on the front panel clears within a second or two.

> **Why does it build on my Mac?** Building it yourself means macOS treats it as your own software, so there are no "unidentified developer" warnings and nothing to approve in System Settings.

Prefer double-clicking?

On the GitHub page, click the green **Code** button → **Download ZIP**. Unzip it and double-click **Install Anti-Symphony.command**. The first time, macOS may say it can't verify the file: right-click it, choose **Open**, then **Open** again.

What gets installed

PART	WHAT IT DOES	WHERE
Symphony Control	The control app, plus the monitor panel in the menu bar.	~/Applications
symphonyd	Small background service: wakes the box, keeps settings, restores them if the box forgets. Starts at login.	~/Library/Application Support/Anti-Symphony

Update or remove

Update: run the same install line again. Your settings and profiles stay.

Remove: run the line with `| bash -s -- --uninstall` at the end instead of `| bash`. Profiles and settings are kept unless you delete the Anti-Symphony folder in Application Support.

SYMPHONY CONTROL

Monitoring

A monitor controller on screen: one big knob, big DIM and MUTE, speaker sets and both headphone outputs. The same panel lives in the menu bar, so you rarely need the full window.



The menu bar panel: click the speaker icon in the menu bar.

Main output

- **Big knob**: main monitor level. Drag up or down. The ring turns amber while DIM is on.
- DIM drops the level for talkback or a phone call; MUTE silences the speakers.
- MAIN ALT MINI switch stereo speaker pairs; QUAD 5.1 7.1 switch to surround; MONO folds to mono.

Phones 1 and 2

- Small knob: headphone level. DIM and MUTE per headphone.
- BUS A / BUS B: send one of the two headphone mixes (see Headphone Mixes).
- The menu under the buttons reads **HP MIX** on a bus, and offers **any other feed**: mirror any output pair, or any DAW or input pair.

Also in the menu bar panel

- **Profile**: load a saved setup.
- **Mac volume keys**: the keyboard's volume and mute keys control the main level while the Symphony is the Mac's sound output.
- **Open at login**.


Speakers

MAIN is any stereo pair; **ALT** and **MINI** any other pairs, or Off (set them on the Monitoring page). **QUAD** plays DAW channels on Analog Out 1–4 (L R Ls Rs; repatch rears to Out 3–4), **5.1** on Out 1–6 (L R C LFE Ls Rs), **7.1** on Out 1–8. MAIN, ALT or MINI goes back to stereo. Analog outputs from Out 1 up to the highest in use follow the knob: keep line sends above them.

SYMPHONY CONTROL

Headphone Mixes

Two separate stereo cue mixes, **Bus A** and **Bus B**, mixed inside the Symphony. Inputs reach the headphones with **zero latency**, because they never go through the Mac.

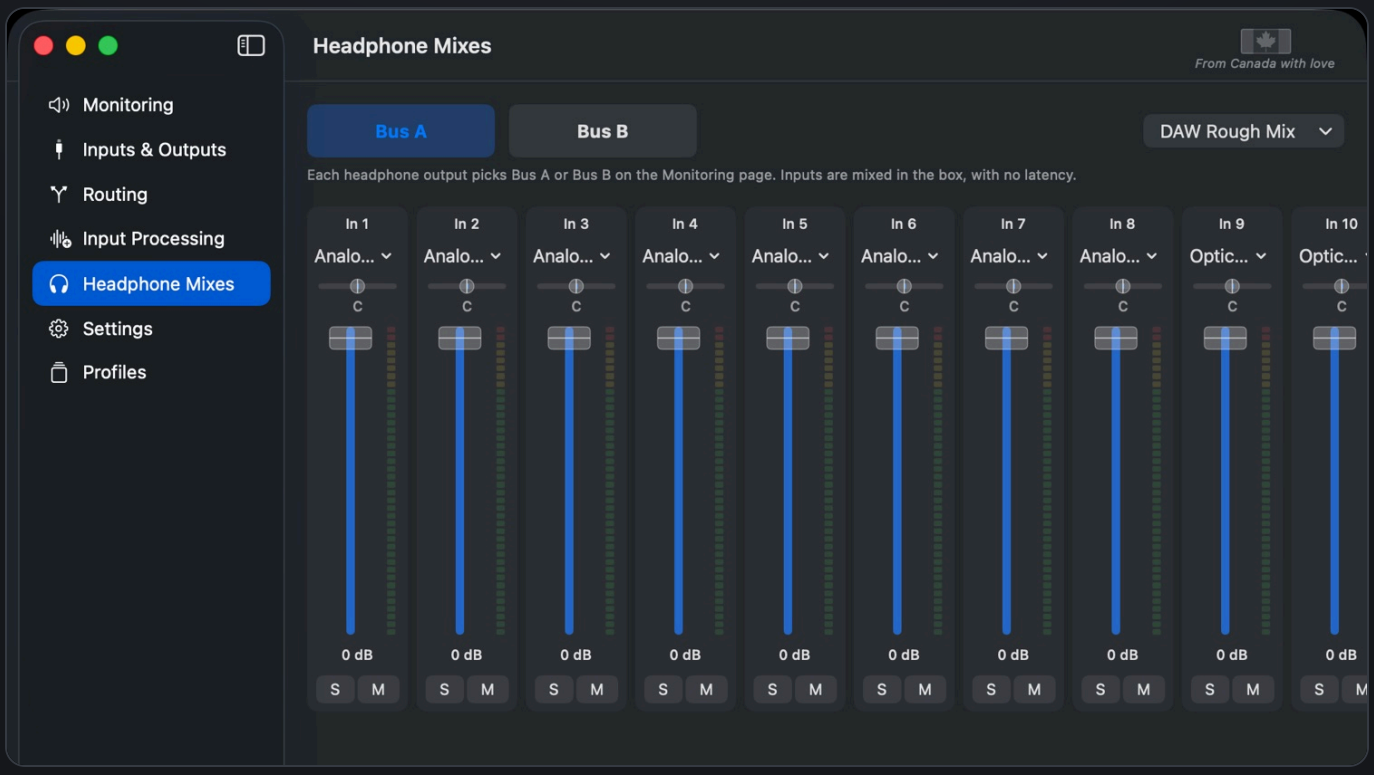

Bus A selected. Each strip: source, pan, fader, meter, solo and mute.

Build a cue mix

1. Click **Bus A** or **Bus B** at the top.
2. On each strip, pick the **source** (an input, or a DAW channel).
3. Set **fader** and **pan**. Pan is centred at **C** and shows L/R amounts. Double-click a pan or fader to reset it.
4. Use **S** (solo) and **M** (mute) per strip; the last strip is the bus's master level.
5. On the Monitoring page, set each headphone to `BUS A` or `BUS B`.

DAW Rough Mix

Artists usually want the track too. **DAW Rough Mix** (top right) puts a DAW output pair on faders 15 and 16, panned left and right. Send your session's rough mix to that pair in the DAW, and the artist hears it alongside their zero-latency inputs.


Meters

Input meters are measured by the box. The bus output meter is worked out from the mixer settings and input levels. DAW channels aren't metered yet.

SYMPHONY CONTROL

Input Processing

Plugin inserts for every input: four slots per channel, for the Audio Unit plugins installed on your Mac.

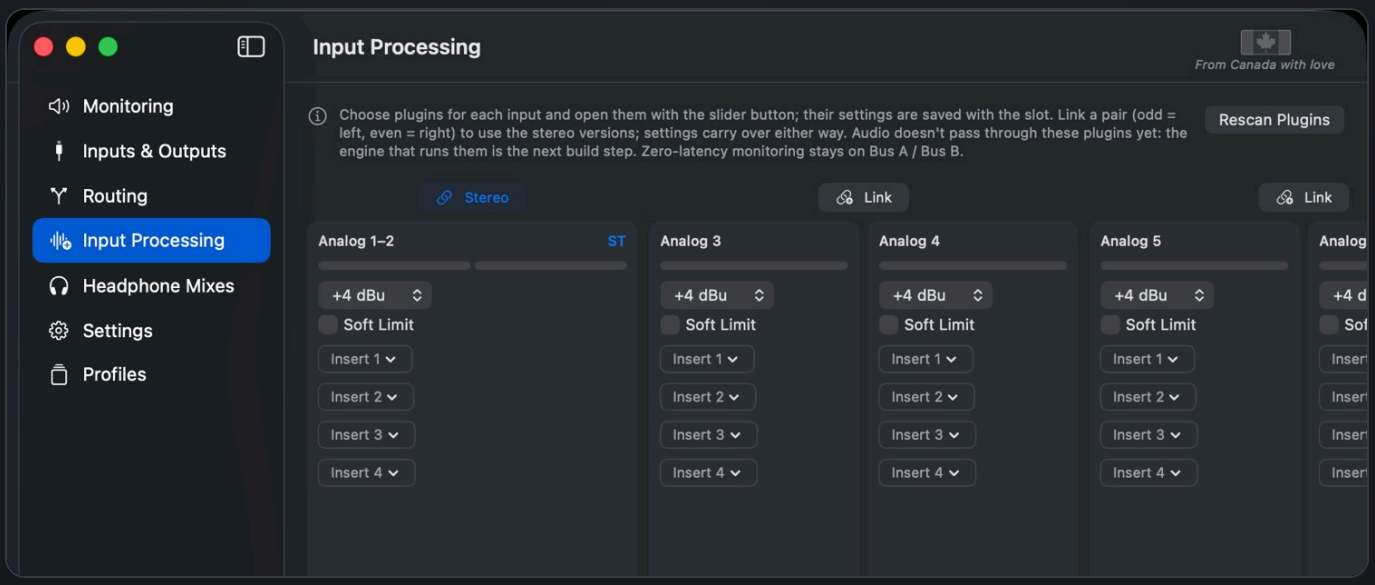

Analog 1–2 linked as a stereo pair (ST). Each strip shows the input meter, the input's reference level and Soft Limit, then four inserts.

Add a plugin

1. Click an **Insert** slot and choose a maker, then a plugin.
2. Click the **slider** button next to it to open the plugin's own window. Its settings are saved with the slot.
3. The **power** button bypasses it (green = active). Choose **None** to remove it.

Stereo pairs

Click **Link** above two channels to make a stereo pair: odd = left, even = right. The pair switches to each plugin's **stereo version** (for example "CLA-76 Mono" becomes "CLA-76 Stereo", "(m)" becomes "(s)") and keeps its settings. Unlinking goes back to the mono versions, still with the same settings.




A plugin window opened from a slot (Pink Spider-DMP).

Current version: setup only. Plugins chosen here are saved with their settings, but audio doesn't pass through them yet. The engine that runs them is in development.


The Symphony has no DSP chip, so plugins run on the Mac. Recordings can be lined up with zero added delay. Live monitoring through plugins always has a small delay (a few milliseconds), so keep the artist's cue on Bus A / Bus B for true zero latency.

SYMPHONY CONTROL

Inputs, Outputs and Routing

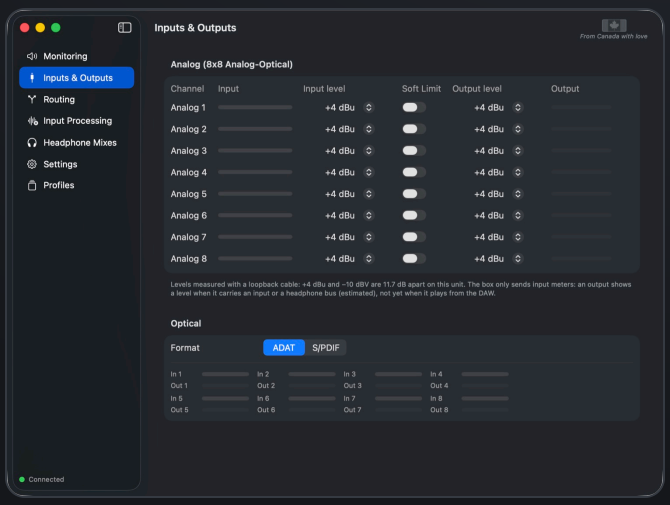

Inputs & Outputs.

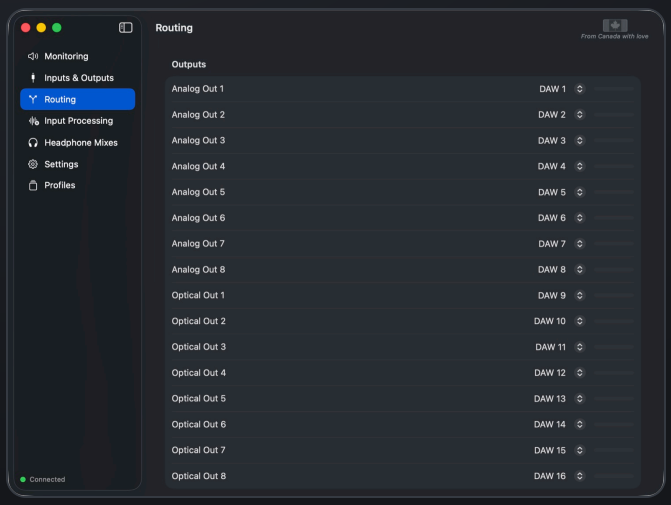

Routing.

Inputs & Outputs

- **Input level / Output level**: +4 dBu (pro) or −10 dBV (consumer) per analog channel. They measure 11.7 dB apart.
- **Soft Limit**: the Symphony's analog soft clipper on each input.
- **Optical**: ADAT or S/PDIF.
- Meters for every input and output. An output shows a level when it carries an input or a headphone bus.


Routing

- **Outputs**: choose what each analog and optical output plays: a DAW channel, an input (direct, zero latency), or Bus A / Bus B.
- **Recording channels**: choose what each of the 16 channels the Mac records carries. Usually Analog In 1–8 and Optical In 1–8; a bus can be recorded too.

> symphonyd saves everything and puts it back if the box forgets its settings (it does when it's power-cycled).

SYMPHONY CONTROL

Settings and calibration

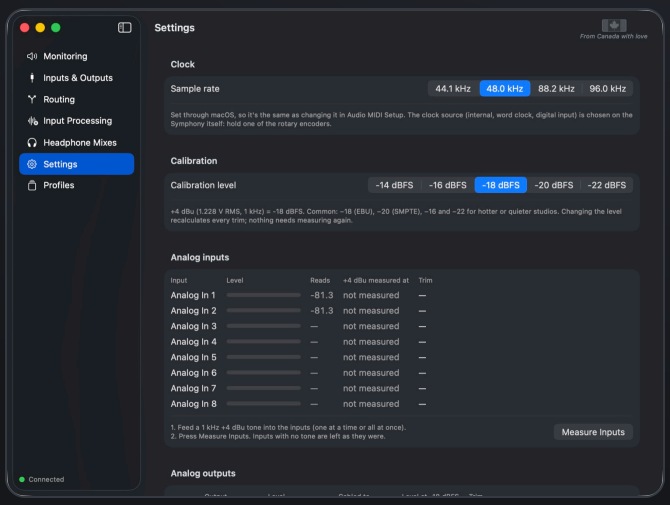

Clock at the top, calibration below.

Clock

Sample rate: 44.1, 48, 88.2 or 96 kHz (the same as Audio MIDI Setup). The clock **source** is chosen on the Symphony itself: hold one of its rotary encoders.

Calibration level

Choose what +4 dBu (1.228 V RMS) reads in your DAW: **−18 dBFS** (EBU), **−20** (SMPTE), or −14, −16, −22. Changing it later recalculates every trim; nothing needs measuring again.

1. Calibrate the inputs

1. Feed a **1 kHz tone at +4 dBu** (1.228 V RMS) into the analog inputs, one at a time or all at once.
2. Click **Measure Inputs**. Inputs with a steady tone get a trim; the others are left alone.

2. Calibrate the outputs (automatic)

1. Patch each output you want to calibrate into an analog input you've already calibrated (default: the same number). Choose the input under **Cabled to**.
2. Tick those outputs and click **Calibrate Outputs**.

The app does the rest: it plays the tone, routes it to the output, measures it on the input, and puts your routing back. It uses a DAW channel nothing else is playing, so the tone only reaches the output being measured.


> Outputs 1–2 usually feed your speakers, so they start unticked. Turn the speakers down before calibrating them.

> The Symphony Mk1 has no fine trim of its own. Trims are applied by Input Processing. If you change a channel's +4 dBu / −10 dBV setting, measure it again: a warning sign shows which ones.

Optical inputs and outputs are digital and need no calibration.

SYMPHONY CONTROL

Profiles, controllers and help

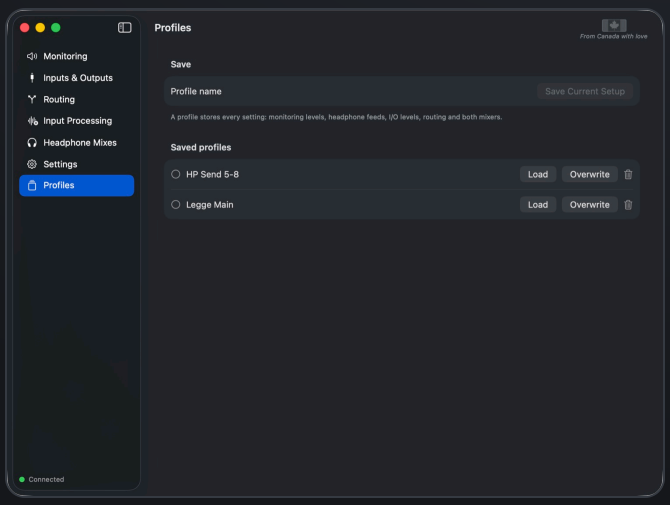

Profiles.

Profiles

A profile stores every setting: monitoring, headphone feeds, I/O levels, routing and both headphone mixes. Type a name and click **Save Current Setup**; **Load**, **Overwrite** or delete them later. Quick-load from the menu bar panel.

Stream Deck and other controllers

Every control is available over OSC, and there's a Bitfocus Companion module with ready-made buttons. See `docs/osc.md` and `companion/` on GitHub.

Troubleshooting

YOU SEE	TRY
"!" stays on the box	Check the USB cable and power. The app should say *Connected* at the bottom left. If it says *symphonyd offline*, run the install line again.
No sound in the DAW	Choose the Symphony as the DAW's audio device. On the Routing page, outputs should play DAW channels.
No speaker icon in the menu bar	It's probably hidden behind the camera notch (see Monitoring).
Settings changed after a power cycle	Wait a few seconds: symphonyd puts them back.
The install stopped with an error	Run it again. The lines just above the error say which step failed. Check the Mac runs macOS 14 or later.

For the curious

The background service logs to `~/Library/Logs/symphonyd.log`. Command-line control: `symctl dump` (in `~/Library/Application Support/Anti-Symphony`). How the box's protocol was worked out, and all the code, are on GitHub.

> Anti-Symphony is free and open source, made by Anti-Music in Canada. Questions and bug reports: github.com/BigDumbRobot/Anti-Symphony/issues.