


1.

PC0 ->192.168.10.1

PC1 ->192.168.10.2

PC2 ->192.168.20.1

PC3 ->192.168.20.2

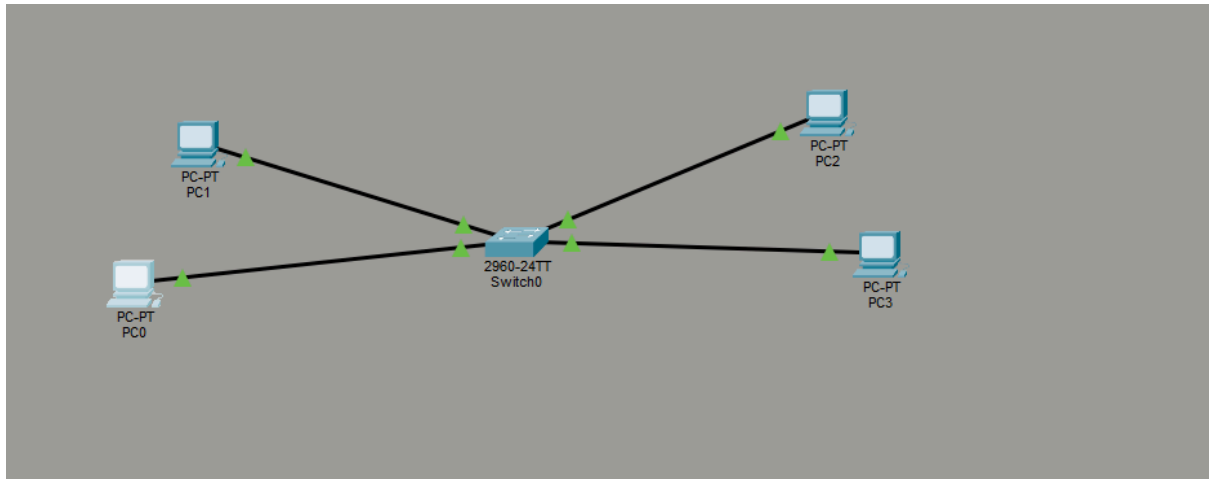

Comando de configuração do switch0:

enable // Entra no modo de privilégio de execução

configure terminal // Entra no modo de configuração global do switch

vlan 2 // Cria a VLAN ID 2 no banco de dados do switch

name PROFESSORES // Nomeia a VLAN 2 como "PROFESSORES"

vlan 3 // Cria a VLAN ID 3 no banco de dados do switch.

name ALUNOS // Nomeia a VLAN 3 como "ALUNOS"

interface fastEthernet 0/1 // Seleciona a porta física 1 do switch

switchport access vlan 2 // Associa a porta 1 à VLAN 2

interface fastEthernet 0/2 // Associa a porta 2 à VLAN 2

switchport access vlan 2 // Associa a porta 3 à VLAN 3

interface fastEthernet 0/3 // Seleciona a porta física 3 do switch

switchport access vlan 3 // Associa a porta 3 à VLAN 3

interface fastEthernet 0/4 // Seleciona a porta física 4 do switch

switchport access vlan 3 // Associa a porta 4 à VLAN 3

end

teste:

```
PC0
Physical Config Desktop Programming Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.2

Pinging 192.168.10.2 with 32 bytes of data:

Reply from 192.168.10.2: bytes=32 time=3ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 3ms, Average = 0ms

C:\>ping 192.168.20.1

Pinging 192.168.20.1 with 32 bytes of data:


Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.20.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>|
```

2:

PC0 ->192.168.10.1
PC1 ->192.168.10.2
PC2 ->192.168.20.1
PC3 ->192.168.20.2
PC0(1) ->192.168.10.3
PC1(1) ->192.168.10.4
PC2(1) ->192.168.20.3
PC3(1) ->192.168.20.4

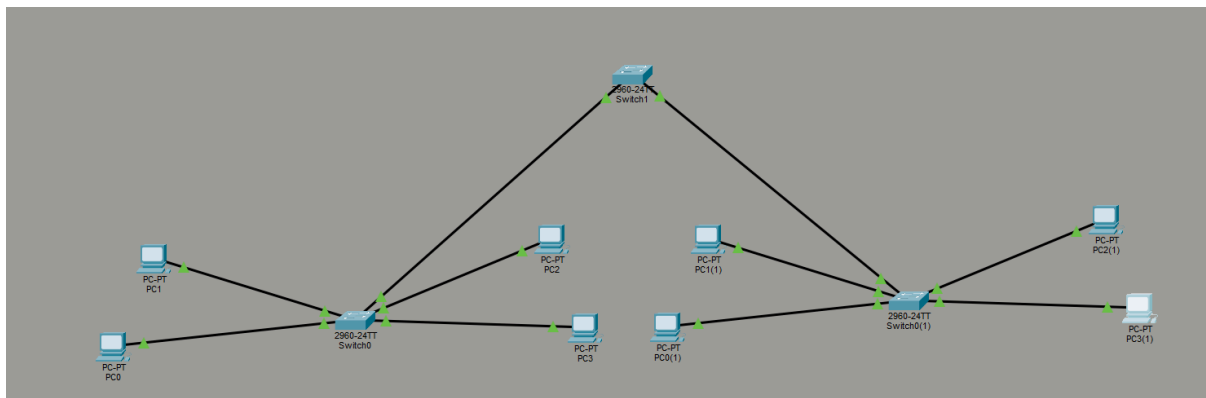

Comando de configuração do switch0:

```
enable // Entra no modo de privilégio de execução
configure terminal // Entra no modo de configuração global do switch

vlan 2 // Cria a VLAN ID 2 no banco de dados do switch
name PROFESSORES // Nomeia a VLAN 2 como "PROFESSORES"
vlan 3 // Cria a VLAN ID 3 no banco de dados do switch.
name ALUNOS // Nomeia a VLAN 3 como "ALUNOS"

interface fastEthernet 0/1 // Seleciona a porta física 1 do switch
switchport access vlan 2 // Associa a porta 1 à VLAN 2
interface fastEthernet 0/2 // Associa a porta 2 à VLAN 2
switchport access vlan 2 // Associa a porta 3 à VLAN 3

interface fastEthernet 0/3 // Seleciona a porta física 3 do switch
switchport access vlan 3 // Associa a porta 3 à VLAN 3
interface fastEthernet 0/4 // Seleciona a porta física 4 do switch
switchport access vlan 3 // Associa a porta 4 à VLAN 3

interface fastEthernet 0/24 // Seleciona a porta física 24 do switch
switchport mode trunk // Seta a porta física 24 para modo trunk

end
```

A configuração do switch0(1) é a mesma coisa.

configuração do o switch1:

```
enable
configure terminal

! O switch central precisa ter as VLANs criadas para saber o que está transportando
vlan 2
name PROFESSORES
vlan 3
name ALUNOS

interface fastEthernet 0/1 // Seleciona a porta física 1 do switch
switchport mode trunk // Seta a porta física 1 para modo trunk

interface fastEthernet 0/2 // Seleciona a porta física 2 do switch
switchport mode trunk // Seta a porta física 2 para modo trunk

end
```

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.10.2

Pinging 192.168.10.2 with 32 bytes of data:

Reply from 192.168.10.2: bytes=32 time=3ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128
Reply from 192.168.10.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 3ms, Average = 0ms

C:\>ping 192.168.20.1

Pinging 192.168.20.1 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.20.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>ping 192.168.10.3

Pinging 192.168.10.3 with 32 bytes of data:

Reply from 192.168.10.3: bytes=32 time<1ms TTL=128
Reply from 192.168.10.3: bytes=32 time<1ms TTL=128
Reply from 192.168.10.3: bytes=32 time<1ms TTL=128
Reply from 192.168.10.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.10.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.20.3

Pinging 192.168.20.3 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 192.168.20.3:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>|
```