


NAMA	: AGUNG AKSA
NIM	: 09010182327007
KELAS	: MI – 3A
MK	: PRAKTIKUM JARKOM
Dynamic Routing	

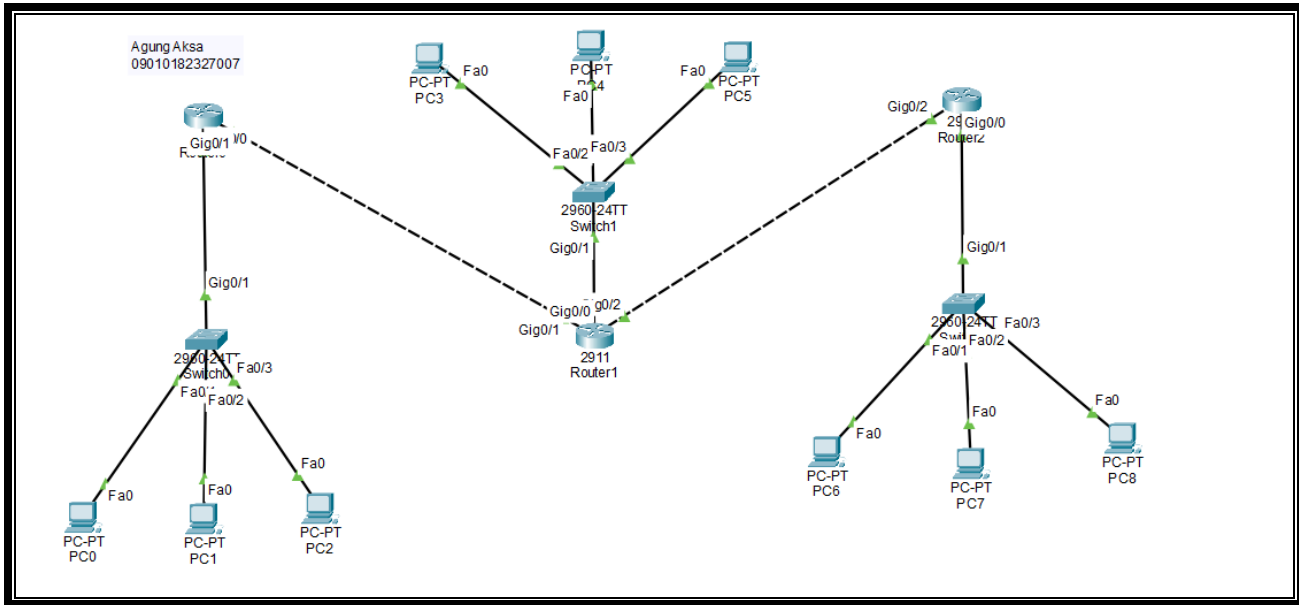

1. Berikut rentang IP Address pada router

No	Nama Group	Range Alamat	Netmask
1	R1	192.168.2.2 – 192.168.2.254	255.255.255.0
2	R2	192.168.20.2 – 192.168.20.254	255.255.255.0
3	R3	192.168.40.2 – 192.168.40.254	255.255.255.0

Tes Koneksi ICMP (catat hasil yang anda dapatkan)

No	Sumber	Tujuan	Hasil	
			Ya	Tidak
1	PC1	PC2	Ya	
		PC3	Ya	
		PC4	Ya	

		PC5	Ya	
		PC6	Ya	
		PC7	Ya	
		PC8	Ya	
		PC9	Ya	
2	PC4	PC1	Ya	
		PC2	Ya	
		PC3	Ya	
		PC5	Ya	
		PC6	Ya	
		PC7	Ya	
		PC8	Ya	
		PC9	Ya	
3	PC7	PC1	Ya	
		PC2	Ya	
		PC3	Ya	
		PC4	Ya	
		PC5	Ya	
		PC7	Ya	
		PC8	Ya	
		PC9	Ya	

Screenshot hasil Ping pada cmd PC:

PC1 -> PC5

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.10

Pinging 192.168.2.10 with 32 bytes of data:

Reply from 192.168.2.10: bytes=32 time=37ms TTL=128
Reply from 192.168.2.10: bytes=32 time=3ms TTL=128
Reply from 192.168.2.10: bytes=32 time=1ms TTL=128
Reply from 192.168.2.10: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.2.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 37ms, Average = 10ms

C:\>ping 192.168.20.11

Pinging 192.168.20.11 with 32 bytes of data:

Request timed out.
Reply from 192.168.20.11: bytes=32 time=1ms TTL=126
Reply from 192.168.20.11: bytes=32 time=1ms TTL=126
Reply from 192.168.20.11: bytes=32 time=13ms TTL=126

Ping statistics for 192.168.20.11:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 13ms, Average = 5ms

C:\>
```

PC1 -> PC7

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.10

Pinging 192.168.2.10 with 32 bytes of data:

Reply from 192.168.2.10: bytes=32 time=37ms TTL=128
Reply from 192.168.2.10: bytes=32 time=3ms TTL=128
Reply from 192.168.2.10: bytes=32 time=1ms TTL=128
Reply from 192.168.2.10: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.2.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 37ms, Average = 10ms

C:\>ping 192.168.20.11

Pinging 192.168.20.11 with 32 bytes of data:

Request timed out.
Reply from 192.168.20.11: bytes=32 time=1ms TTL=126
Reply from 192.168.20.11: bytes=32 time=1ms TTL=126
Reply from 192.168.20.11: bytes=32 time=13ms TTL=126

Ping statistics for 192.168.20.11:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 13ms, Average = 5ms

C:\>ping 192.168.40.10

Pinging 192.168.40.10 with 32 bytes of data:

Request timed out.
Reply from 192.168.40.10: bytes=32 time<1ms TTL=125
Reply from 192.168.40.10: bytes=32 time=18ms TTL=125
Reply from 192.168.40.10: bytes=32 time<1ms TTL=125

Ping statistics for 192.168.40.10:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 18ms, Average = 6ms

C:\>
```

PC4 -> PC2

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.20.10

Pinging 192.168.20.10 with 32 bytes of data:

Reply from 192.168.20.10: bytes=32 time=68ms TTL=128
Reply from 192.168.20.10: bytes=32 time=14ms TTL=128
Reply from 192.168.20.10: bytes=32 time=22ms TTL=128
Reply from 192.168.20.10: bytes=32 time=43ms TTL=128

Ping statistics for 192.168.20.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 14ms, Maximum = 68ms, Average = 36ms

C:\>ping 192.168.2.11

Pinging 192.168.2.11 with 32 bytes of data:

Request timed out.
Reply from 192.168.2.11: bytes=32 time=11ms TTL=126
Reply from 192.168.2.11: bytes=32 time=11ms TTL=126
Reply from 192.168.2.11: bytes=32 time=13ms TTL=126

Ping statistics for 192.168.2.11:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 11ms, Maximum = 13ms, Average = 11ms

C:\>
```

PC4 -> PC8

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.20.10

Pinging 192.168.20.10 with 32 bytes of data:

Reply from 192.168.20.10: bytes=32 time=68ms TTL=128
Reply from 192.168.20.10: bytes=32 time=14ms TTL=128
Reply from 192.168.20.10: bytes=32 time=22ms TTL=128
Reply from 192.168.20.10: bytes=32 time=43ms TTL=128

Ping statistics for 192.168.20.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 14ms, Maximum = 68ms, Average = 36ms

C:\>ping 192.168.2.11

Pinging 192.168.2.11 with 32 bytes of data:

Request timed out.
Reply from 192.168.2.11: bytes=32 time=11ms TTL=126
Reply from 192.168.2.11: bytes=32 time=11ms TTL=126
Reply from 192.168.2.11: bytes=32 time=13ms TTL=126

Ping statistics for 192.168.2.11:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 11ms, Maximum = 13ms, Average = 11ms

C:\>ping 192.168.40.11

Pinging 192.168.40.11 with 32 bytes of data:

Request timed out.
Reply from 192.168.40.11: bytes=32 time=4ms TTL=126
Reply from 192.168.40.11: bytes=32 time<1ms TTL=126
Reply from 192.168.40.11: bytes=32 time=12ms TTL=126

Ping statistics for 192.168.40.11:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 12ms, Average = 5ms

C:\>
```

PC7 -> PC3

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.40.10

Pinging 192.168.40.10 with 32 bytes of data:

Reply from 192.168.40.10: bytes=32 time=37ms TTL=128
Reply from 192.168.40.10: bytes=32 time=1ms TTL=128
Reply from 192.168.40.10: bytes=32 time=1ms TTL=128
Reply from 192.168.40.10: bytes=32 time=21ms TTL=128

Ping statistics for 192.168.40.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 37ms, Average = 15ms

C:\>ping 192.168.2.12

Pinging 192.168.2.12 with 32 bytes of data:

Request timed out.
Reply from 192.168.2.12: bytes=32 time=11ms TTL=125
Reply from 192.168.2.12: bytes=32 time=12ms TTL=125
Reply from 192.168.2.12: bytes=32 time=11ms TTL=125

Ping statistics for 192.168.2.12:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 11ms, Maximum = 12ms, Average = 11ms

C:\>|
```

PC7 -> PC9

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.40.10

Pinging 192.168.40.10 with 32 bytes of data:

Reply from 192.168.40.10: bytes=32 time=37ms TTL=128
Reply from 192.168.40.10: bytes=32 time=1ms TTL=128
Reply from 192.168.40.10: bytes=32 time=1ms TTL=128
Reply from 192.168.40.10: bytes=32 time=21ms TTL=128

Ping statistics for 192.168.40.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 37ms, Average = 15ms

C:\>ping 192.168.2.12

Pinging 192.168.2.12 with 32 bytes of data:

Request timed out.
Reply from 192.168.2.12: bytes=32 time=11ms TTL=125
Reply from 192.168.2.12: bytes=32 time=12ms TTL=125
Reply from 192.168.2.12: bytes=32 time=11ms TTL=125

Ping statistics for 192.168.2.12:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 11ms, Maximum = 12ms, Average = 11ms

C:\>ping 192.168.40.12

Pinging 192.168.40.12 with 32 bytes of data:

Reply from 192.168.40.12: bytes=32 time<1ms TTL=128
Reply from 192.168.40.12: bytes=32 time=7ms TTL=128
Reply from 192.168.40.12: bytes=32 time<1ms TTL=128
Reply from 192.168.40.12: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.40.12:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 7ms, Average = 1ms

C:\>
```



1. Analisa yang saya dapatkan menunjukkan bahwa konfigurasi dan pengaturan dynamic routing berjalan dengan baik karena semua koneksi ICMP menunjukkan hasil "Ya" (berhasil), yang berarti semua perangkat bisa saling berkomunikasi melalui jaringan yang diatur secara dinamis.
2. Kesimpulan yang saya dapatkan: Konfigurasi dynamic routing yang diterapkan memungkinkan semua perangkat dalam jaringan untuk terhubung tanpa masalah, menunjukkan bahwa jaringan telah dikonfigurasi dengan benar.