

# GH60 Manual

## (Layout5-64key)

### 1. Introduction

- (1) GH60 mechanical keyboard with USB connection.
- (2) Automatic recognition and compatible with Windows,Android,Mac, IOS.
- (3) Keyboard can be re-programmable and re-flashed by QMK open source.
- (4) Technical support,email: [laura\\_zhou@126.com](mailto:laura_zhou@126.com)

### 2.PCBA is flashed with following layout



### 3. Fn+key Functions

Fn	+	W	↑
		A	←
		S	↓
		D	→
		Q	RGB Toggle
		E	RGB Mode
		R	RGB HUI(RGB hue increase)
		T	RGB HUD(RGB hue decrease)
		Y	RGB SAI(RGB saturation increase)
		U	RGB SAD(RGB saturation decrease)
		I	RGB VAI(RGB brightness increase)
		O	RGB VAD(RGB brightness decrease)
		P	PrtSC
		{[	ScrLK
		}]	Pause/Break
		::	Home
		“ ”	PgUp
		X	Led-
		C	LED on/off
		V	Led+
		N	Vol-
		M	Mute
		< ,	Vol+

		>.	End
		?/	PgDn
		Z	Reset or enter re-flashing mode of QMK


#### 4. Use tweezers to check the keymap.(Help with software “keyboard test utility”)



**Use a LED to check the backlit**

**LED on: Fn+C**

**LED +: Fn+V**

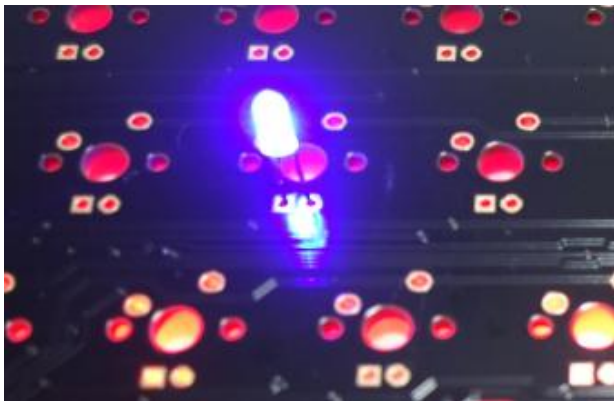

#### 5. Insert switches for modifiers,insert LEDs for them and bend the legs to fix on PCB,type them to insure they will not get stuck

**Solder the switches for modifiers,electric test the switches**

**Solder LEDs for modifiers,cut LEDs legs,test**

**Insert the rest switches,solder and test them**

**Insert the rest LEDs, solder and test them**

#### 6.Instructions for removing of the Modifier with the stabilizers

**Use hard tweezers to strongly hold the bean of the stabilizers,then remove the keycap little by little,end by end.(You'll not pull out or damage the stabilizers and switches by this way.)**

