

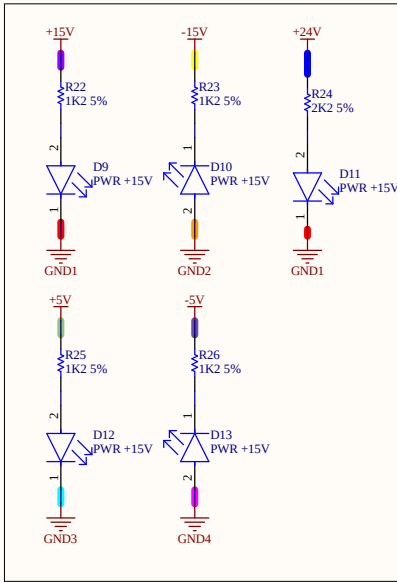
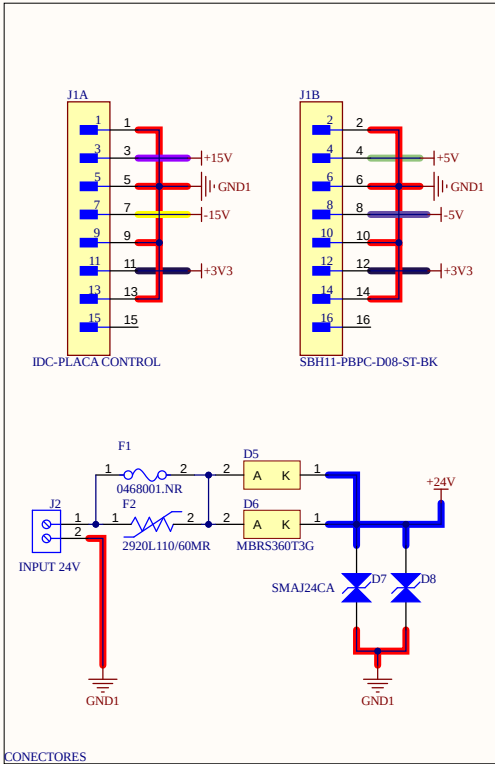
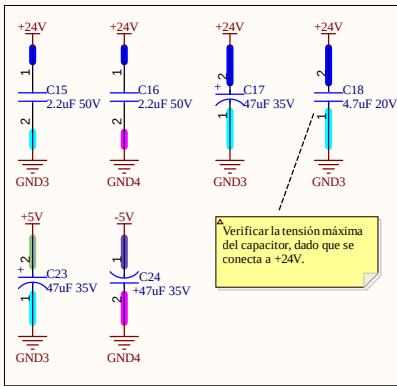
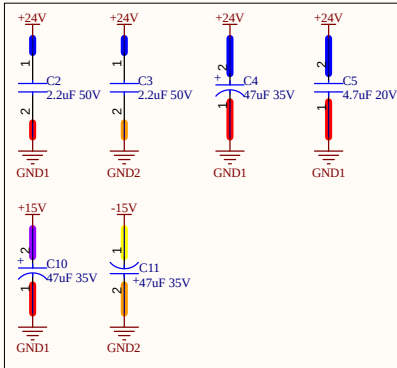
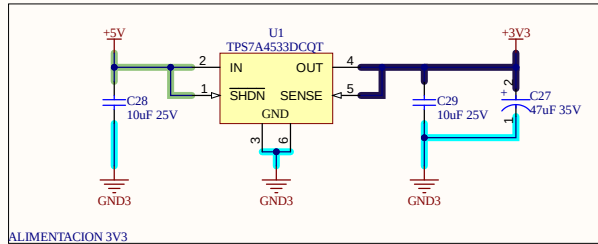
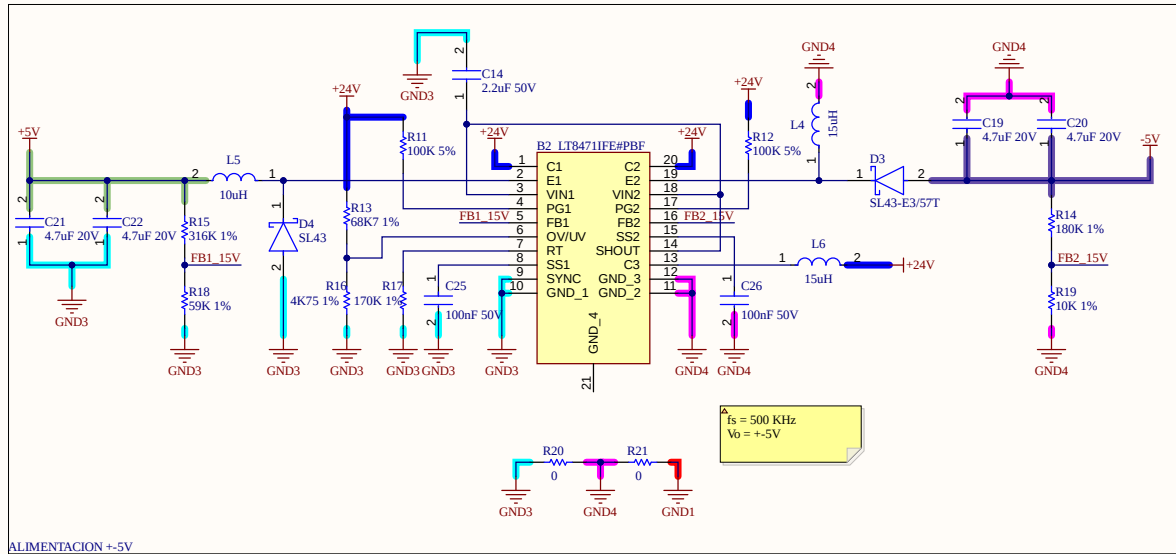


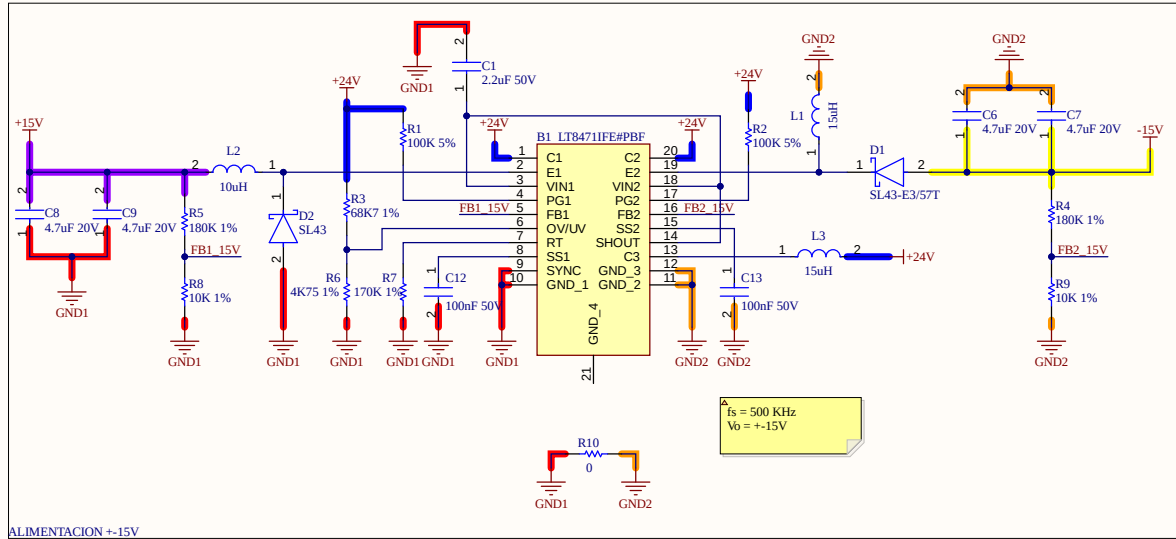

Title		
Placa de Alimentación		
Size	Number	Revision
A3		V01.R00
Date:	1/05/2026	
File:	D:\aguat\...Principal.V01.R00.SchDoc	Sheet of
		Agustin M. Zuliani

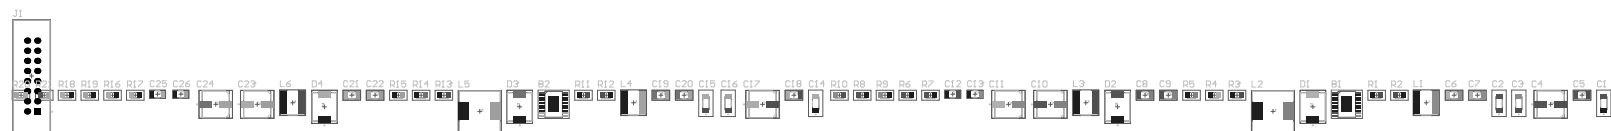

Comment	Description	Designator	Footprint	LibRef	Quantity
LT8471IFE#PBF	DC/DC CONVERTER, MULTITOPOLGY, 50V, TSSOP-20, Supply Voltage:50V; No. of Step-Down DC - DC Converters:2; No. of LDO Regulators:-; No. of Regulated Outputs:2; Digital IC Case:TSSOP; No. of Pins:20Pins; Operating Temperature Min:-40CRoHS Compliant: Yes	B1, B2	SOP65P640X120-21N	LT8471IFE#PBF	2
2.2uF 50V	Capacitor	C1, C2, C3, C14, C15, C16	MBASx31x	MBASU31LSB7225KTN A01	6
47uF 35V	CAP ALUM 47UF 20% 35V SMD	C4, C10, C11, C17, C23, C24, C27	FP-FK-D-MFG	CMP-05427-000002-1	7
4.7uF 20V	CAP CER 1UF 10V X7R 1206	C5, C6, C7, C8, C9, C18, C19, C20, C21, C22	FP-CC1206-1_25-MFG	CMP-03422-001171-1	10
100nF 50V	CAP CER 0.1UF 50V X7R 1206	C12, C13, C25, C26	FP-C1206C-EB-MFG	CMP-03020-005759-1	4
10uF 25V	CAP 10uF 25V +20% 1812 (4532 Metric) Thickness 2.8mm SMD	C28, C29	CAPC1812(4532)280_L	CMP-1040-01657-2	2
SL43-E3/57T	DIODE SCHOTTKY 30V 4A DO214AB	D1, D3	FP-95402-MFG	CMP-02539-000070-1	2
SL43	DIODE SCHOTTKY 30V 4A DO214AB	D2, D4	FP-95402-MFG	CMP-02539-000070-1	2
MBR5360T3G	Schottky Power Rectifier, 2-Pin SMC, Pb-Free, Tape and Reel	D5, D6	ONSC-SMC-2-403-03_V	CMP-1055-00394-1	2
SMAJ24CA	Transient Voltage Suppressor, 6.40 to 231 V, 24 V Stand-off Voltage, Bi-Directional, -55 to 155 degC, 2-pin DO-214AC, Pb-Free, Tape and Reel	D7, D8	VISH-DO-214AC-2_N	CMP-0548-00269-2	2
PWR +15V	SML-LX0805UWC-TR White LED, 0805 Diffused, Rectangle Lens SMD package	D9, D10, D11, D12, D13	FP-SML-LX0805UWC-TR-MFG	CMP-00229-00139794-1	5
0468001.NR	FUSE BOARD MNT 1A 63VAC/VDC 1206	F1	FP-0468-MFG	CMP-2000-05753-2	1
2920L110/60MR	PTC RESET FUSE 60V 1.1A 2920	F2	FP-2920L-MFG	CMP-08606-000028-1	1
IDC-PLACA CONTROL	CONN HEADER VERT 16POS 2.54MM	J1	FP-SBH11-PBPC-D08-ST-BK-MFG	CMP-25680-000019-1	1
INPUT 24V	111 Series 5MM Pitch Straight, Pcb Terminal Block, Through Hole, 2 Way	J2	691111710002	CMP-1502-03262-3	1
15uH	Shielded Wirewound Inductor 15uH 20% 2.3A 91mQ SMD	L1, L3, L4, L6	FP-NR6045-MFG	CMP-14484-001063-1	4
10uH	Inductor Power Shielded Wirewound 10uH 20% 100KHz Ferrite 4.1A 32.5mQ DCR 17R	L2, L5	FP-NR10050-MFG	CMP-14484-000424-1	2
100K 5%	124K 0.125W 1% 0805 (2012 Metric) SMD	R1, R2, R11, R12	RESC0805(2012)_M	CMP-1013-00746-1	4
68K7 1%	124K 0.125W 1% 0805 (2012 Metric) SMD	R3, R13	RESC0805(2012)_M	CMP-1013-00746-1	2
180K 1%	124K 0.125W 1% 0805 (2012 Metric) SMD	R4, R5, R14	RESC0805(2012)_M	CMP-1013-00746-1	3
4K75 1%	124K 0.125W 1% 0805 (2012 Metric) SMD	R6, R16	RESC0805(2012)_M	CMP-1013-00746-1	2
170K 1%	124K 0.125W 1% 0805 (2012 Metric) SMD	R7, R17	RESC0805(2012)_M	CMP-1013-00746-1	2
10K 1%	124K 0.125W 1% 0805 (2012 Metric) SMD	R8, R9, R19	RESC0805(2012)_M	CMP-1013-00746-1	3
0	124K 0.125W 1% 0805 (2012 Metric) SMD	R10, R20, R21	RESC0805(2012)_M	CMP-1013-00746-1	3
316K 1%	124K 0.125W 1% 0805 (2012 Metric) SMD	R15	RESC0805(2012)_M	CMP-1013-00746-1	1
59K 1%	124K 0.125W 1% 0805 (2012 Metric) SMD	R18	RESC0805(2012)_M	CMP-1013-00746-1	1
1K2 5%	124K 0.125W 1% 0805 (2012 Metric) SMD	R22, R23, R25, R26	RESC0805(2012)_M	CMP-1013-00746-1	4
2K2 5%	124K 0.125W 1% 0805 (2012 Metric) SMD	R24	RESC0805(2012)_M	CMP-1013-00746-1	1
TPS7A4533DCQT	Single Output Fast Transient Response LDO, 1.5 A, Fixed 3.3 V Output, 2.1 to 20 V Input, 6-pin SOT-223 (DCQ), -40 to 125 degC, Green (RoHS & no Sb/Br)	U1	DCQ0006A_M	CMP-0395-00359-2	1