


CHARGE-PERMIT-01 v0.3 – latch + regulated CD bias; complete charger NOT qualified

FAULT_BUS_N LOW clears Q even with ARM HIGH. Releasing fault alone does not re-arm.
D and PRE tied HIGH. Only a new ARM rising edge after reset recovery may set Q. Q-bar intentionally unused.
External fault sources / MCU revoke must sink or release; never drive shared bus HIGH.

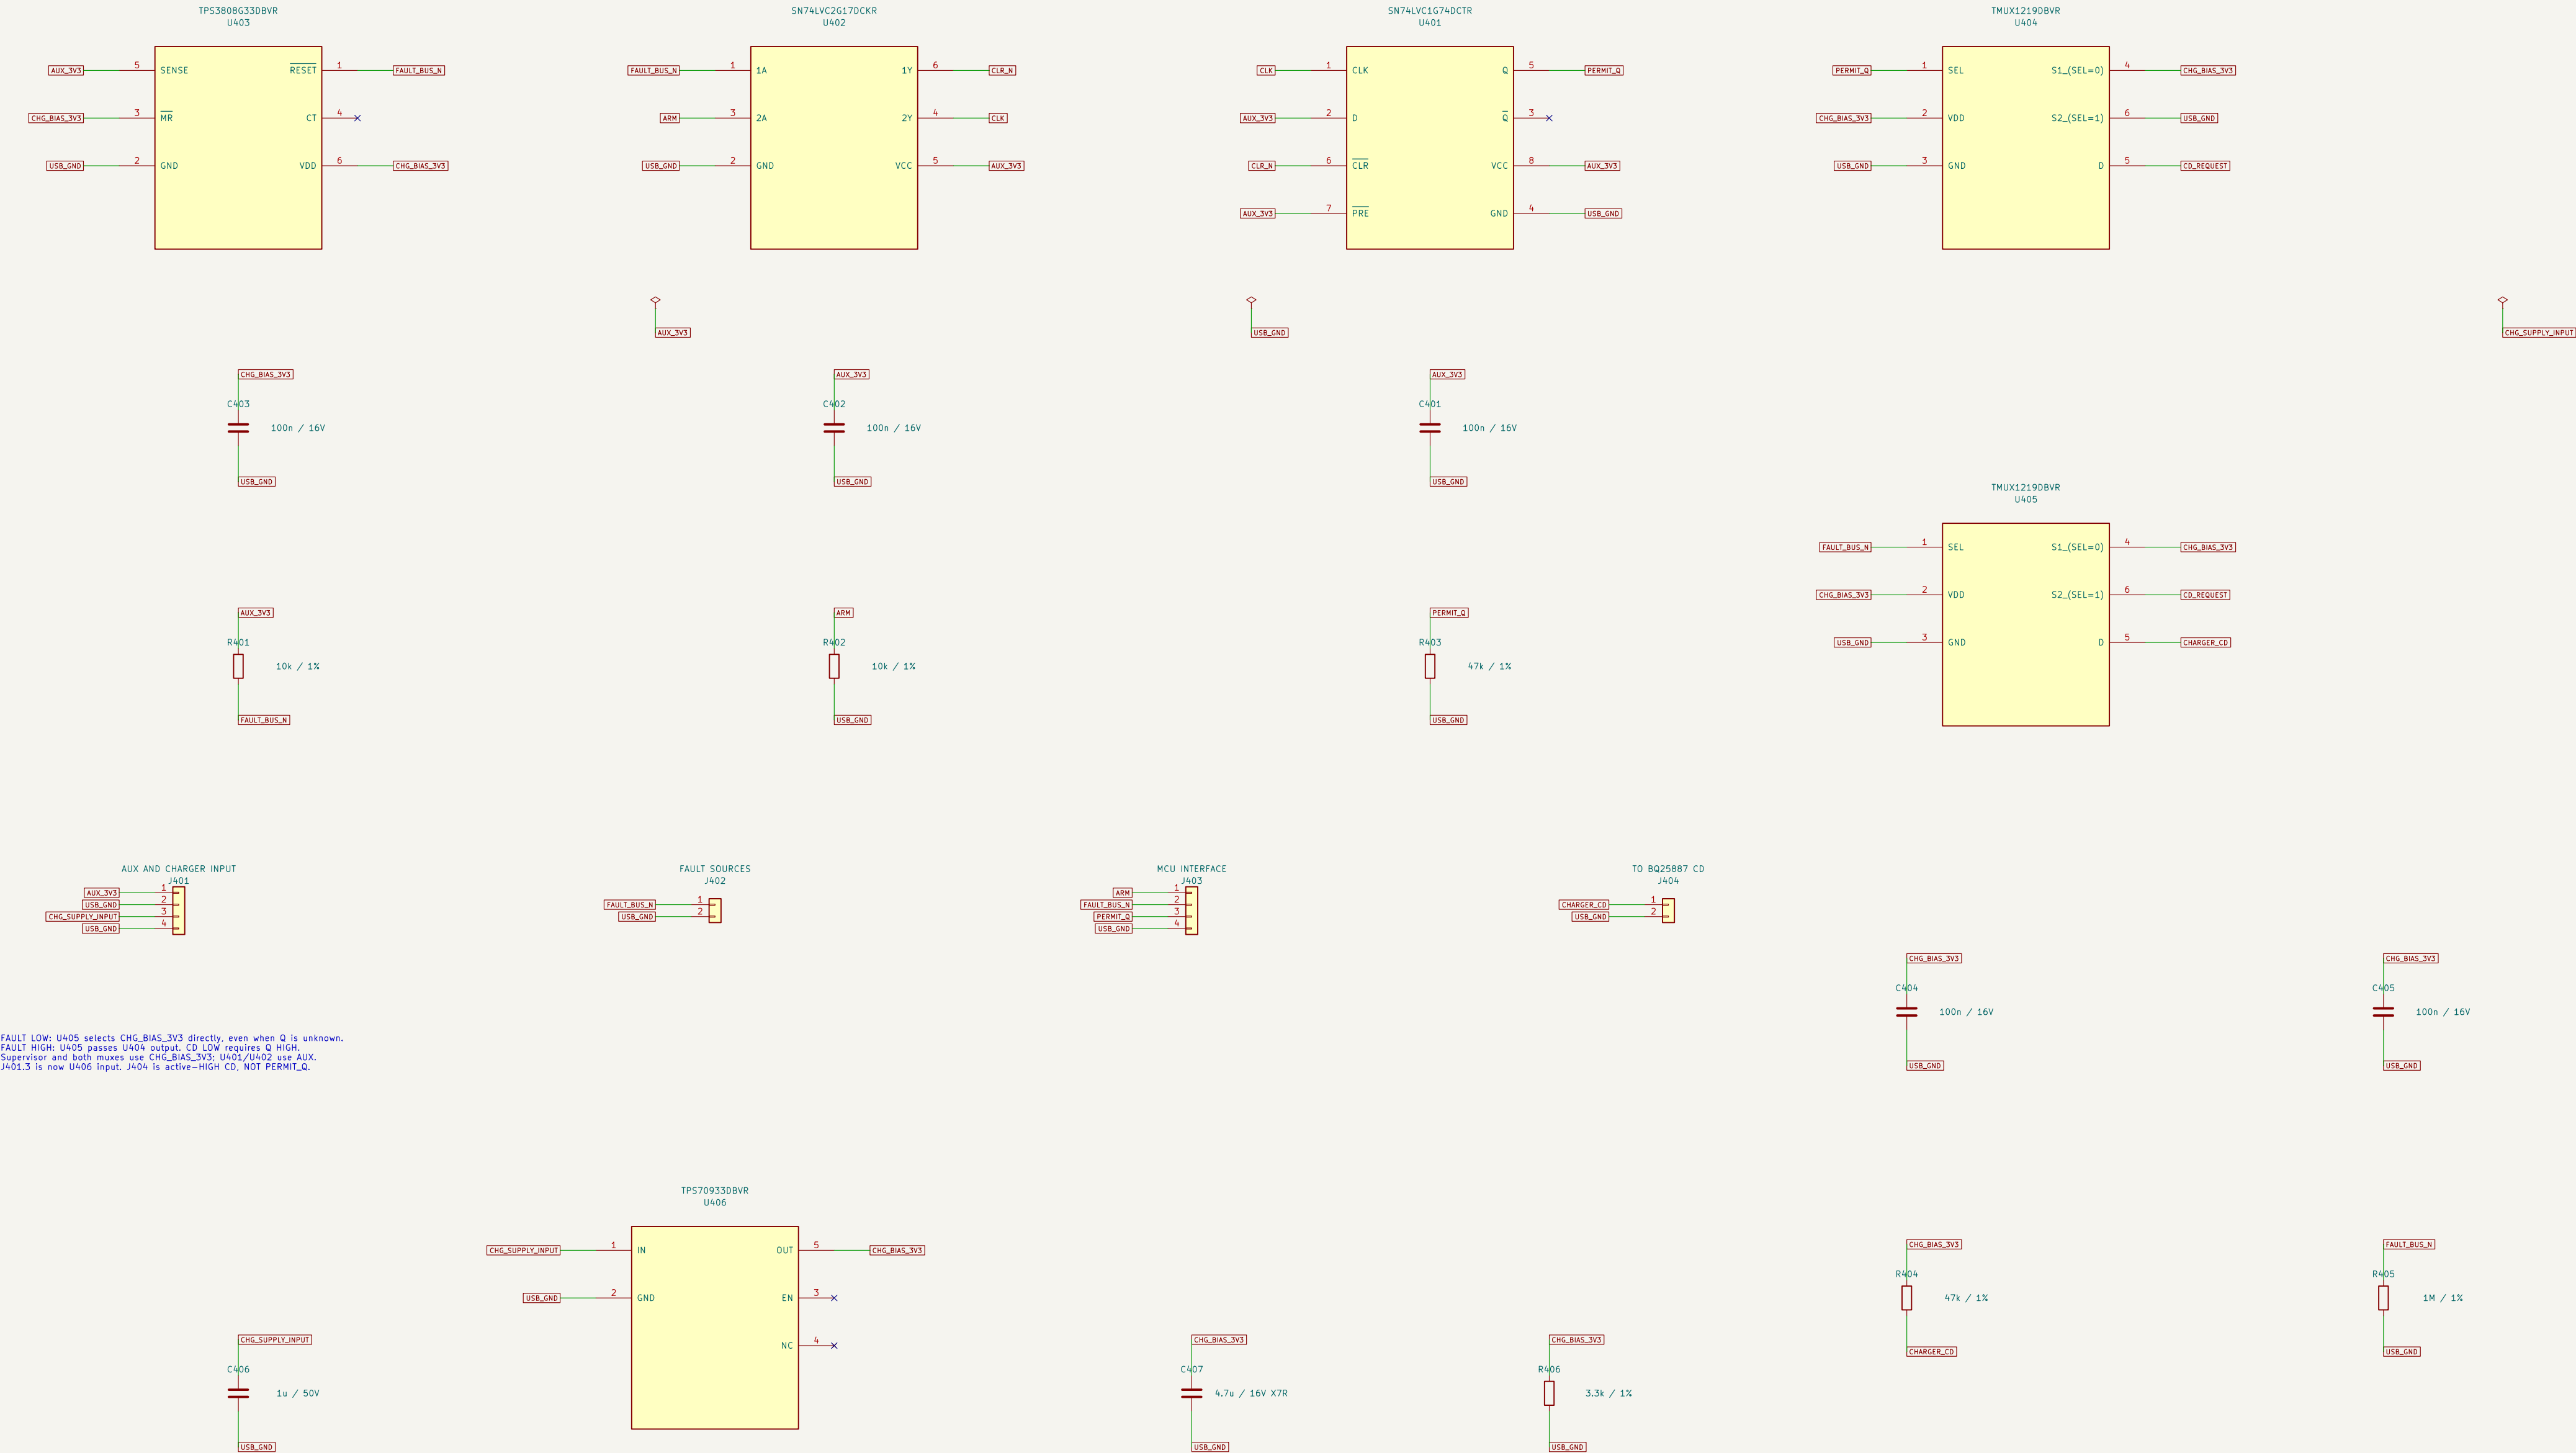

FAULT LOW: U405 selects CHG_BIAS_3V3 directly, even when Q is unknown.
FAULT HIGH: U405 passes U404 output. CD LOW requires Q HIGH.
Supervisor and both muxes use CHG_BIAS_3V3; U401/U402 use AUX.
J401.3 is now U406 input. J404 is active-HIGH CD, NOT PERMIT_Q.

CHG_BIAS_3V3 is now regulated 3.3V, target 3.0-3.6V. U406 tolerates the conditional 5.55V input clamp.
AUX 3.0-3.6V; SENSE falling nominal 3.07V. Delays/fast ramps/bias loss and restart still require measurement.
No MCU, watchdog, INA300 or charger power stage here. This sheet does not authorize battery connection.