



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC




TOP VIEW
Scale 1:1; looking down (along -Z)

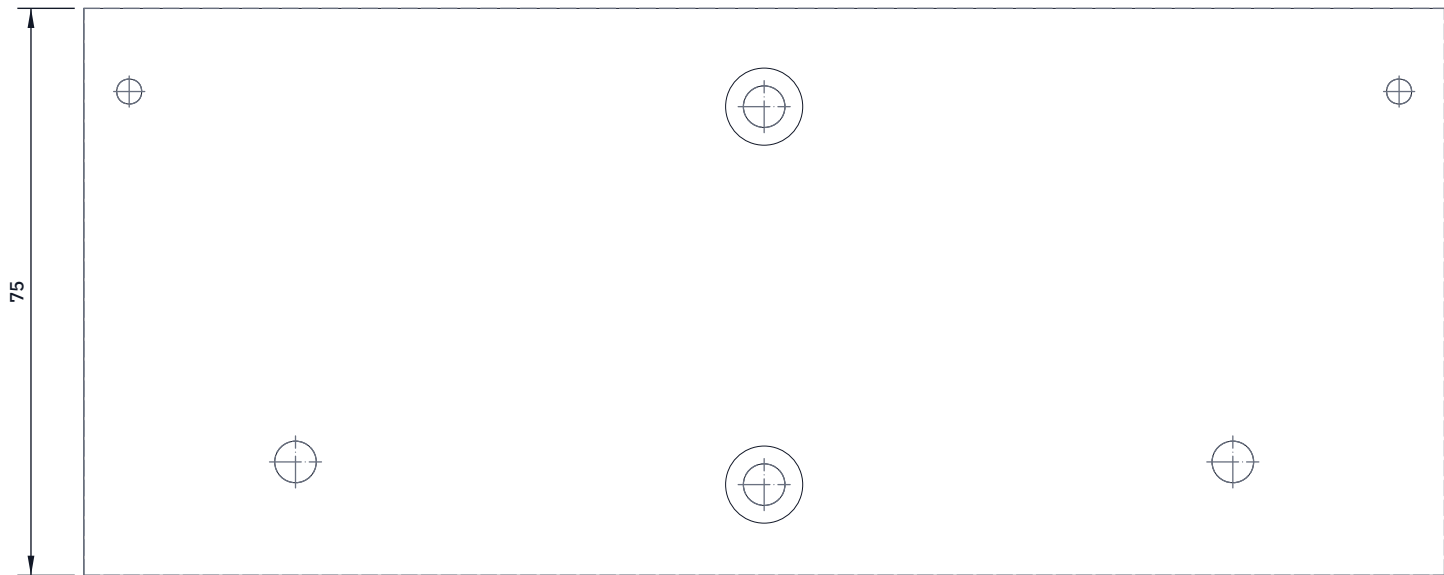

FRONT VIEW
Scale 1:1; looking at the front (along +Y)



RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

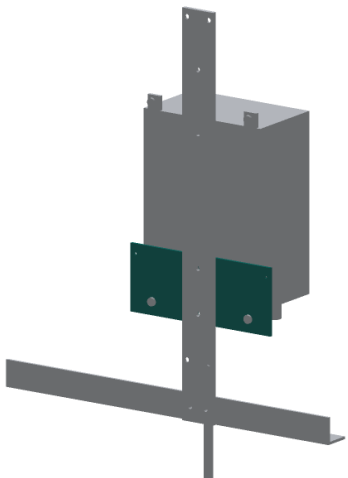

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 180 x 75 mm from 3 mm sheet; round the corners about 2 mm.
Heights up from the bottom edge; sideways from the centre line.
Lug holes: 5.5 mm, 62 mm each side, 15 up (FieldNode's lower lugs).
Sun shield holes (hot sites): drill 3.3 mm and tap M4, 84 mm each side, 64 up. Drill them on every node; they cost nothing.
Rail bolts: 5.5 mm on the centre line, 12 and 62 up, countersunk from the front so the M5 heads sit flush under the enclosure.
This is FieldNode's back plate hole pattern for its lower half.
Fit: back face on the rail front, centred; enclosure back sits on its front face, bottom of the enclosure 24 above the plate's edge.
Check: the lug holes are 124 mm apart, the shield holes 168 mm.

AIRSTREET

github.com/BoujeeEnjinia1701/airstreet

AirStreet lower adapter plate: making sketch

DRAWING NO. AST-DWG-103			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium sheet 3 mm, 5052 or 6061 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	