



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC




TOP VIEW
Scale 1:1; looking down (along -Z)

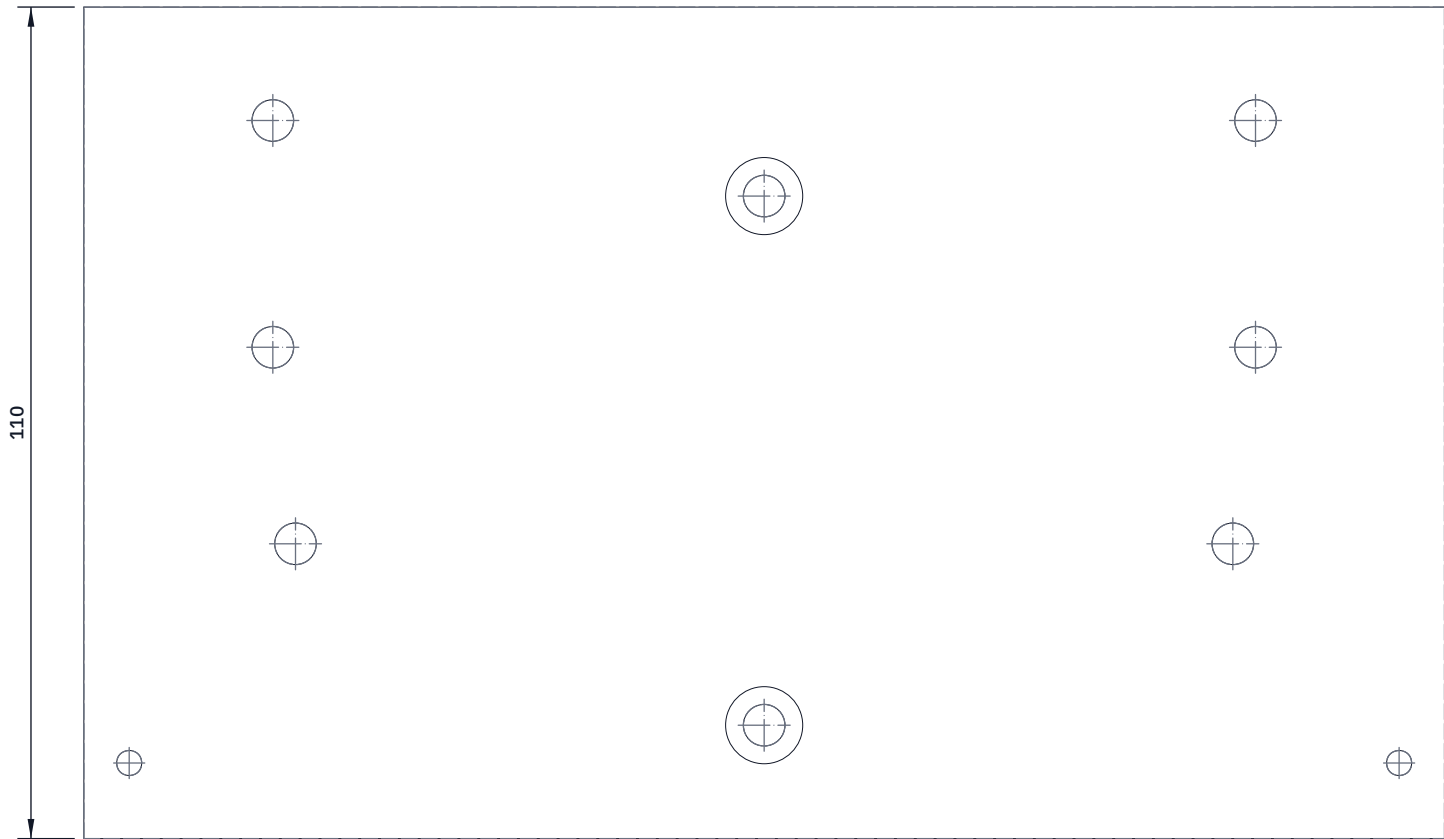

FRONT VIEW
Scale 1:1; looking at the front (along +Y)



RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

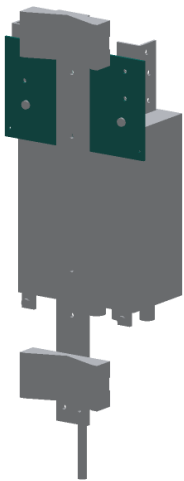

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 180 x 110 mm from 3 mm sheet; round the corners about 2 mm.
Heights up from the bottom edge; sideways from the centre line.
Sun shield holes (hot sites): drill 3.3 mm, tap M4; 84 each side, 10 up.
Lug holes: 5.5 mm, 62 mm each side, 39 up (FieldNode's upper lugs).
Plate clip holes: 5.5 mm, 65 mm each side, 65 and 95 up.
Rail bolts: 5.5 mm on the centre line, 15 and 85 up, countersunk from the front so the M5 heads sit flush.
The top edge is where FieldNode's back plate top edge would be, so FieldNode's posts pass it with the same clearance.
Fit: back face on the rail front; enclosure back on its lower 30 mm.
Check: plate clip holes 130 apart across, 30 apart up.

AIRSTREET

github.com/BoujeeEnjinia1701/airstreet

AirStreet upper adapter plate: making sketch

DRAWING NO. AST-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium sheet 3 mm, 5052 or 6061 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	