
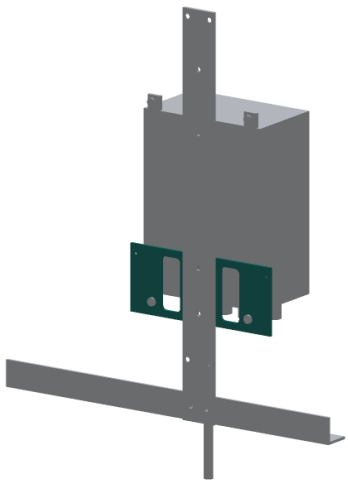
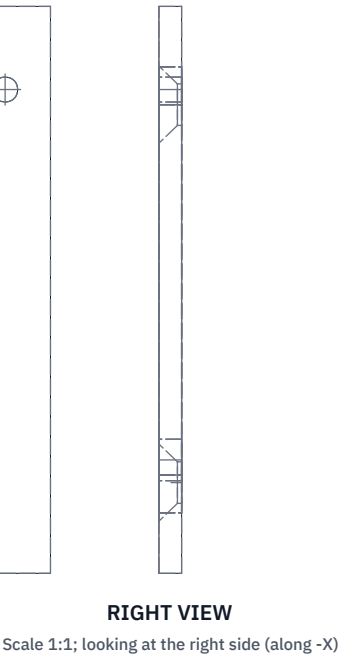
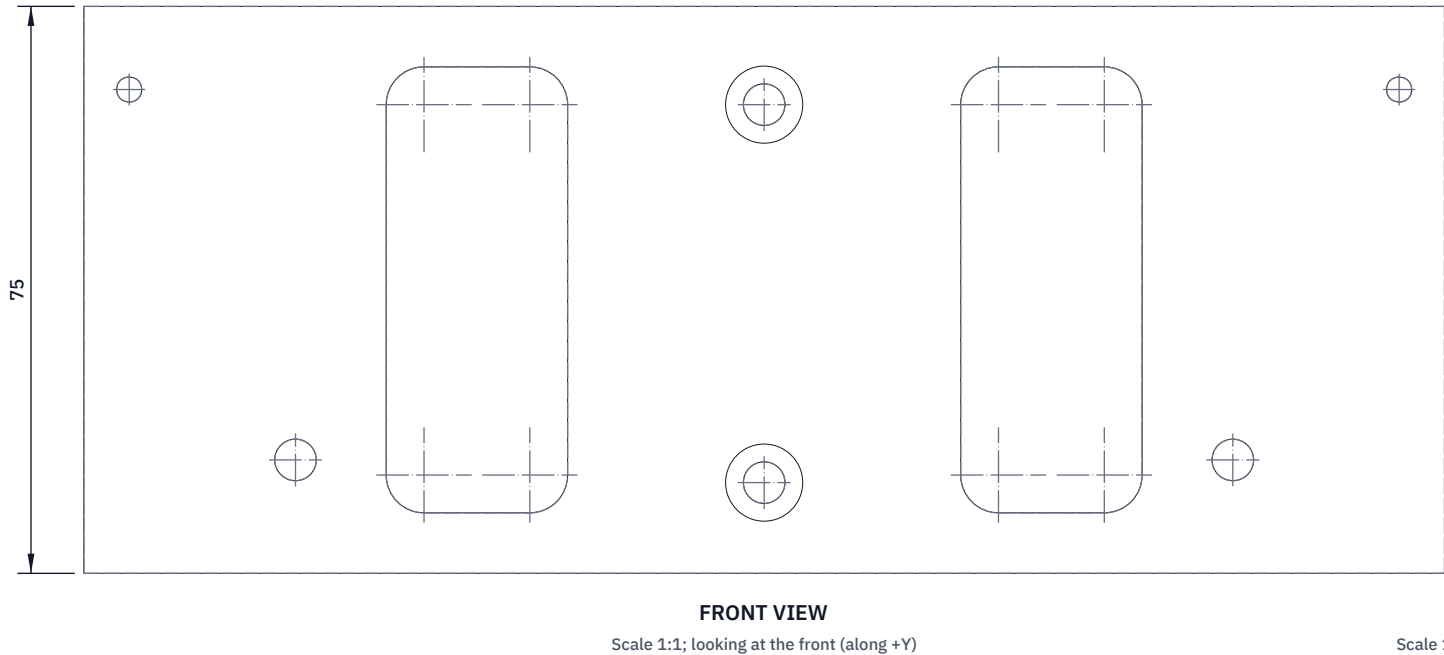


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC
P2	Two lightening windows added	2026-10-02	AC

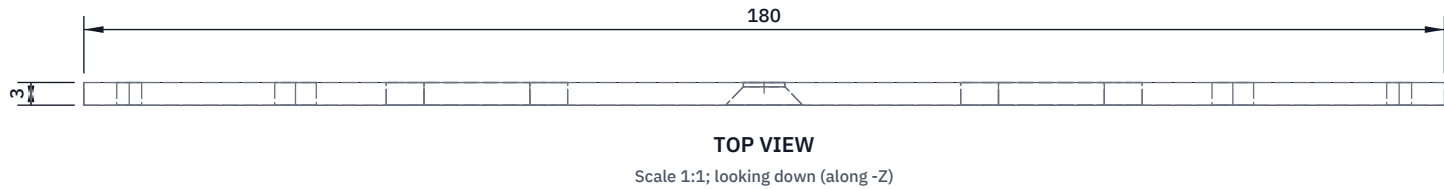

HOW TO MAKE IT AND HOW IT FITS

Cut 180 x 75 mm from 3 mm sheet; round the corners about 2 mm.

Heights up from the bottom edge; sideways from the centre line.

Lug holes: 5.5 mm, 62 mm each side, 15 up (FieldNode's lower lugs).

Sun shield holes (hot sites): drill 3.3 mm and tap M4, 84 mm each side, 64 up. Drill them on every node; they cost nothing.

Rail bolts: 5.5 mm on the centre line, 12 and 62 up, countersunk from the front so the M5 heads sit flush under the enclosure.

Windows: two 24 x 59, corners R5, 26 to 50 each side, 8 to 67 up; cut out to save weight. Deburr. Holes as FieldNode's back plate.

Fit: back face on the rail front, centred; enclosure back sits on its front face, bottom of the enclosure 24 above the plate's edge.

Check: the lug holes are 124 mm apart, the shield holes 168 mm.

AIRSTREET				github.com/BoujeeEnjinia1701/airstreet			
AirStreet lower adapter plate: making sketch							
DRAWING NO. AST-DWG-103			REV P2		SHEET 1 of 1		SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 		DATE 2026-10-02		DRAWN Amish Chadha	
MATERIAL / NOTES Aluminium sheet 3 mm, 5052 or 6061 class							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com							
Generated from cad/src; do not edit by hand							