BUILD PLAN SKETCH, PLAN NOT YET BUILT

AirStreet · github.com/BoujeeEnjinia1701/airstreet

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC
P2	Two lightening windows added	2026-10-02	AC



TOP VIEW

Scale 1:1; looking down (along -Z)

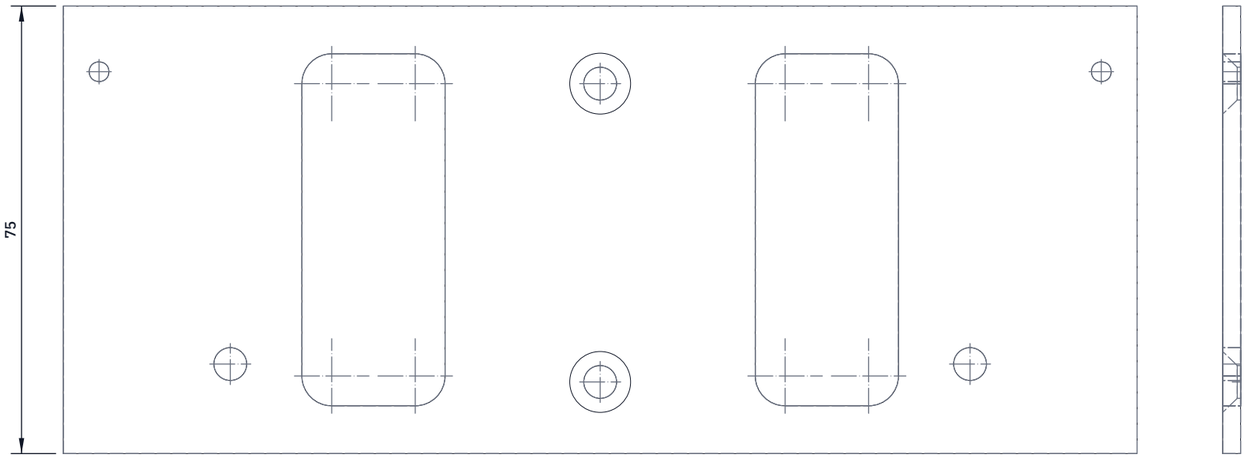

FRONT VIEW

Scale 1:1; looking at the front (along +Y)

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

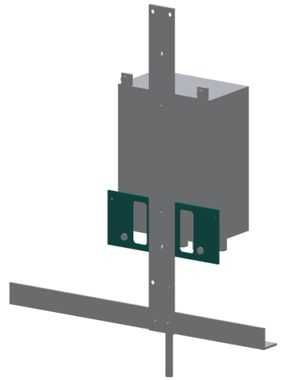

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 180 x 75 mm from 3 mm sheet; round the corners about 2 mm.
Heights up from the bottom edge; sideways from the centre line.
Lug holes: 5.5 mm, 62 mm each side, 15 up (FieldNode's lower lugs).
Sun shield holes (hot sites): drill 3.3 mm and tap M4, 84 mm each side, 64 up. Drill them on every node; they cost nothing.
Rail bolts: 5.5 mm on the centre line, 12 and 62 up, countersunk from the front so the M5 heads sit flush under the enclosure.
Windows: two 24 x 59, corners R5, 26 to 50 each side, 8 to 67 up; cut out to save weight. Deburr. Holes as FieldNode's back plate.
Fit: back face on the rail front, centred; enclosure back sits on its front face, bottom of the enclosure 24 above the plate's edge.
Check: the lug holes are 124 mm apart, the shield holes 168 mm.

AIRSTREET

github.com/BoujeeEnjinia1701/airstreet

AirStreet lower adapter plate: making sketch

DRAWING NO.	REV	SHEET	SIZE
AST-DWG-103	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:1	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES

Aluminium sheet 3 mm, 5052 or 6061 class

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand