BUILD PLAN SKETCH, PLAN NOT YET BUILT

AirStreet · github.com/BoujeeEnjinia1701/airstreet

| REV | DESCRIPTION | DATE | BY |
|---|---|---|---|
| P1 | Making sketch for the prototype build plan | 2026-09-30 | AC |
| P2 | Two lightening windows added | 2026-10-02 | AC |




**TOP VIEW**

Scale 1:1; looking down (along -Z)

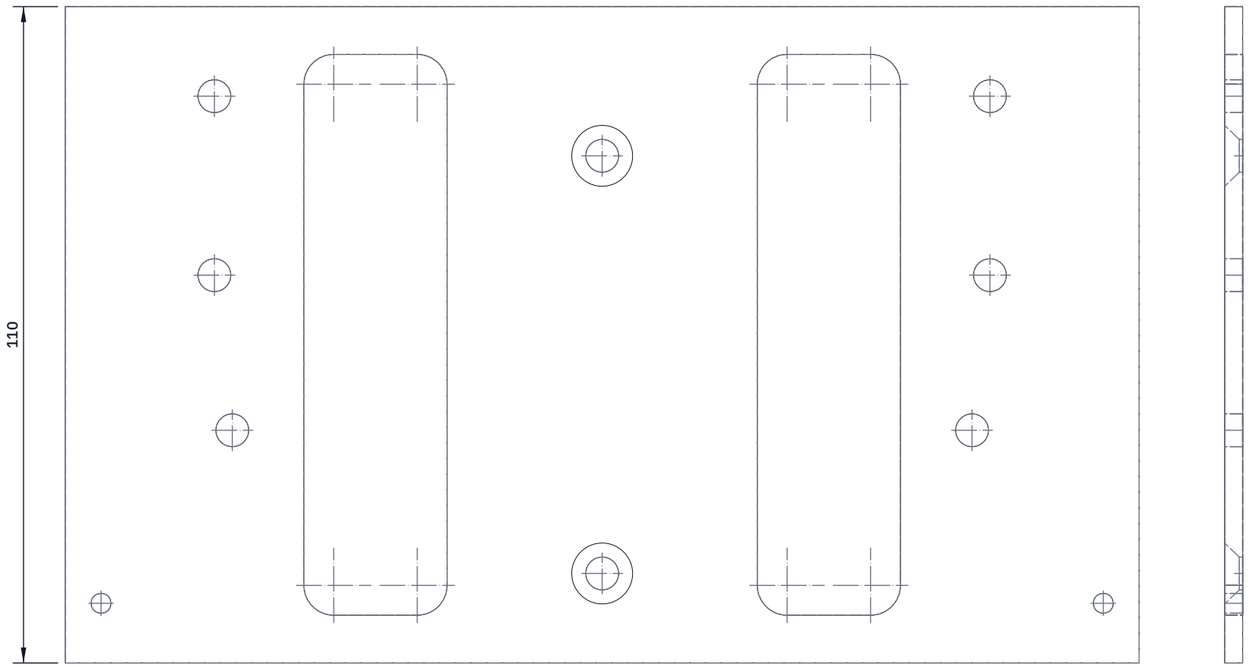


**FRONT VIEW**

Scale 1:1; looking at the front (along +Y)



**RIGHT VIEW**

Scale 1:1; looking at the right side (along -X)

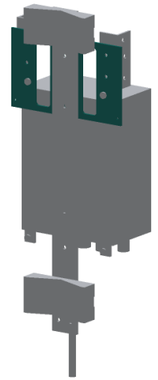

**WHERE IT GOES**

This part in colour, its neighbours in grey

**HOW TO MAKE IT AND HOW IT FITS**

Cut 180 x 110 mm from 3 mm sheet; round the corners about 2 mm.
Heights up from the bottom edge; sideways from the centre line.
Sun shield holes (hot sites): drill 3.3 mm, tap M4; 84 each side, 10 up.
Lug holes: 5.5 mm, 62 mm each side, 39 up (FieldNode's upper lugs).
Plate clip holes: 5.5 mm, 65 mm each side, 65 and 95 up.
Rail bolts: 5.5 mm on the centre line, 15 and 85 up, countersunk from the front so the M5 heads sit flush.
Windows: two 24 x 94, corners R5, 26 to 50 each side, 8 to 102 up; cut out to save weight. Deburr.
The top edge is where FieldNode's back plate top edge would be.
Fit: back face on the rail front; enclosure back on its lower 30 mm.
Check: plate clip holes 130 apart across, 30 apart up.

AIRSTREET

github.com/BoujeeEnjinia1701/airstreet

# AirStreet upper adapter plate: making sketch

| DRAWING NO. | REV | SHEET | SIZE |
|---|---|---|---|
| AST-DWG-104 | P2 | 1 of 1 | ANSI B |

| SCALE | UNITS | PROJECTION | DATE | DRAWN |
|---|---|---|---|---|
| 1:1 | mm | | 2026-10-02 | Amish Chadha |

MATERIAL / NOTES

Aluminium sheet 3 mm, 5052 or 6061 class

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand