


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW

Scale 1:1; looking down (along -Z)

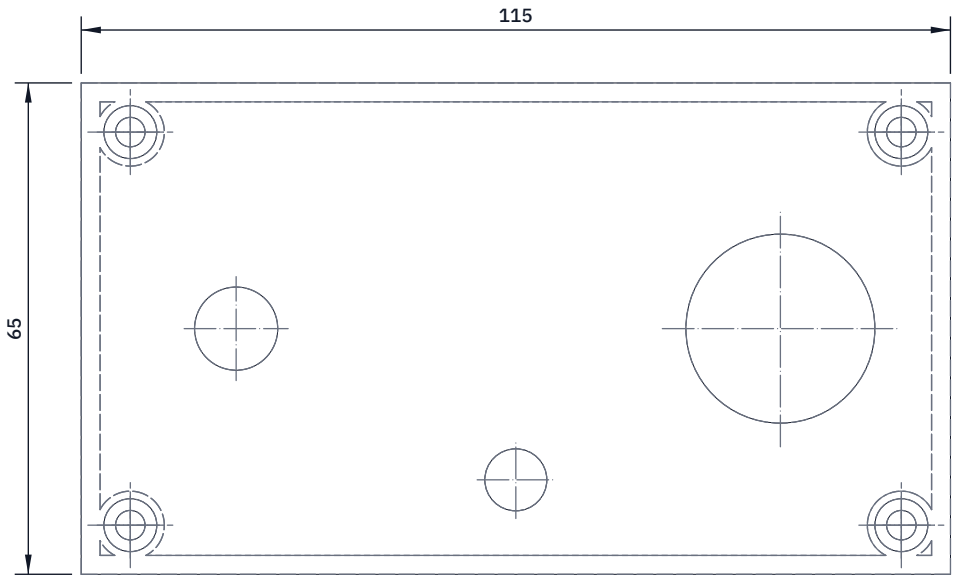


FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

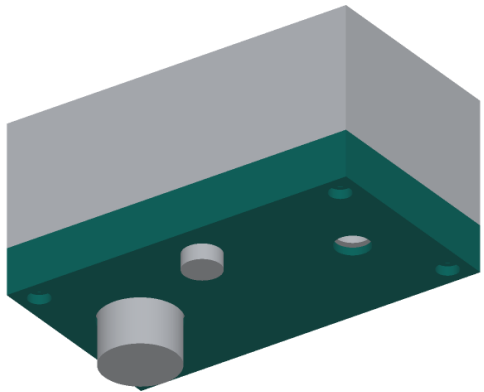

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Drawn upside down: the cover lies outside face up with the unit's front edge toward you, as in the cover layout picture of the plan, so the transducer hole is on the right of the top view.

Transducer hole 25 mm, 35 mm from the centre toward the end that is on the left when the unit is seen from the front. Window hole 11 mm, 37 mm toward the other end. Both on the long centre line.

Vent hole 8.2 mm, on the short centre line, 20 mm from the long centre line toward the front edge.

Tape the face, pilot 3 mm slowly with wood behind, open out with a step drill, light pressure. Deburr; no solvents.

Fit: the probe goes through the 25 mm hole; the printed collar and ToF holder are bonded inside; the vent nut goes inside.

Check: no crack from any hole under a bright lamp.

BinLevel enclosure cover: drilling sketch

DRAWING NO. BNL - DWG - 103			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Bought IP67 ABS or PC box 115 x 65 x 55 mm (cover part)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	