



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

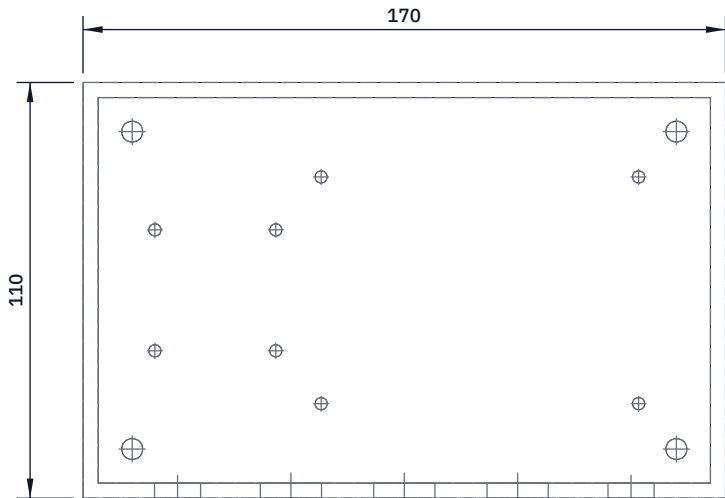

TOP VIEW

Scale 1:2; looking down (along -Z)

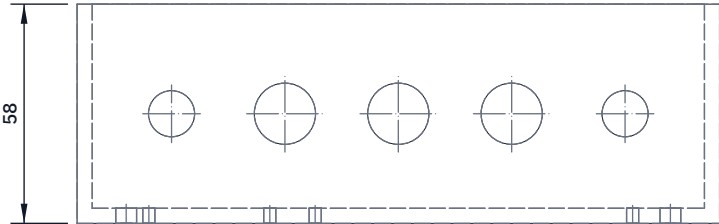


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

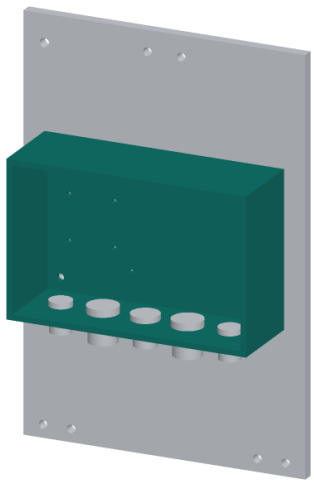

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Drawn lying on its back with the lid off: the top view looks into the box at the base; the front view shows the bottom face.

Base, from the base's centre: four 5.5 mm holes at 72 each side, 42 above and below (the hub screws).

Base: eight 3.2 mm holes for the board spacers and standoffs, countersunk outside so the M3 heads sit flush (positions in the hub holes picture).

Bottom face, on its centre line, sideways from the centre:

60 left: 12.5 mm (steel probe gland, M12)

30 left and 30 right: 16.5 mm (gauge glands, M16)

centre: 16.5 mm (M12 panel connector, M16 thread)

60 right: 12.5 mm (air probe gland, M12). Left and right as seen from the lid.

Deburr inside and out; clean the lid gasket groove of chips.

BRIDGEPULSE

github.com/BoujeeEnjinia1701/bridgepulse

BridgePulse hub enclosure: drilling sketch

DRAWING NO. BRP-DWG-105		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-09-30	DRAWN Amish Chadha
MATERIAL / NOTES Bought die-cast aluminium box, IP67, 170 x 64 x 110 mm				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	