

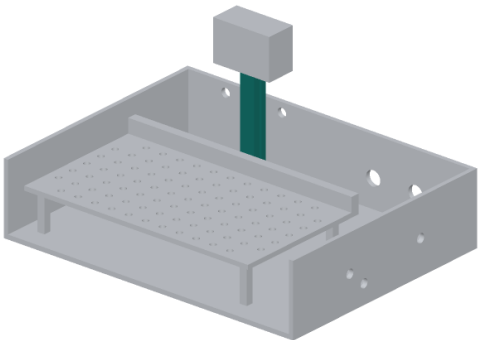


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



WHERE IT GOES
This part in colour, its neighbours in grey

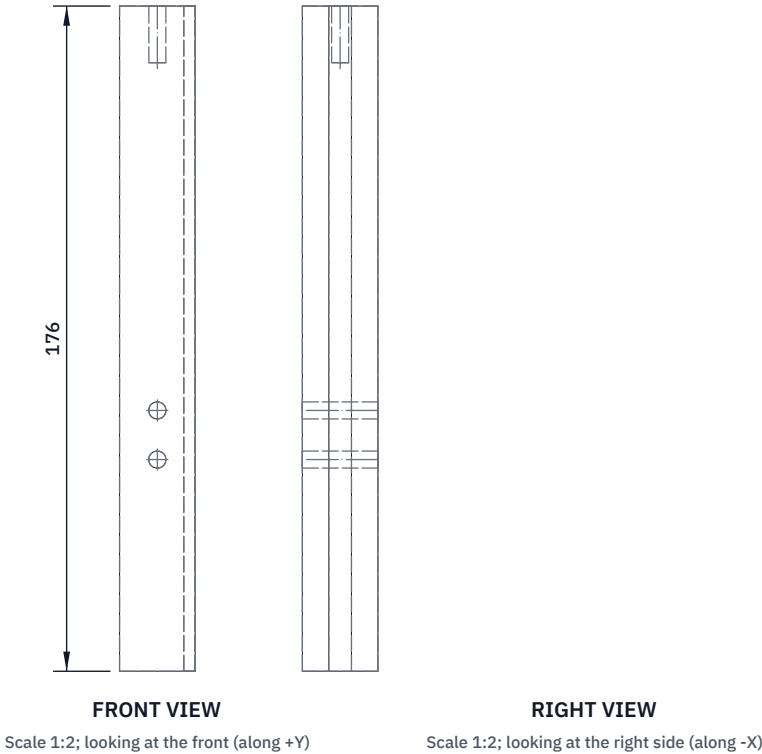

HOW TO MAKE IT AND HOW IT FITS

Print a square post 20 x 20 x 176 in PETG, standing up.

Two 4.5 mm holes through it, front to back, 56 and 69 up from the foot, matching the tapped holes in the tray rail.

A 4.5 mm hole down the top end, 15 deep, and a 6 mm channel down one face for the sensor leads.

Fit: the foot stands on the chamber floor, one face flat against the back of the tray rail, held by two M4 nylon screws. The reference cluster's carrier (80 x 40) screws onto the top with one M4 nylon screw.

The references sit 120 above the tray, clear of the fan.

Check: the mast stands upright against the rail.

CALRIG		github.com/BoujeeEnjinia1701/calrig			
CalRig reference mast: making sketch					
DRAWING NO. CLR-DWG-107			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha	
MATERIAL / NOTES PETG, 3D printed, 40 % infill					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	