


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

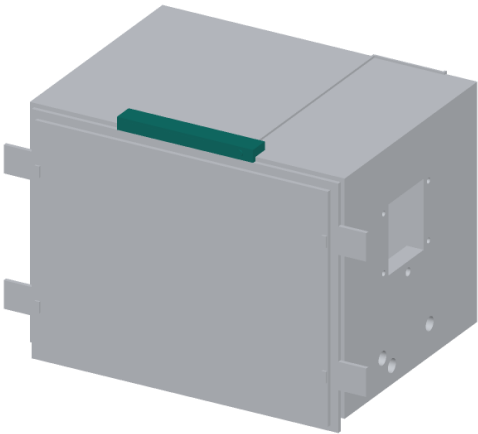

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Print a strip 200 long: a top 30 deep x 12 tall and, under its front edge, a lip 6 deep x 6 tall (front face 18 tall).


A 5.2 mm hole through it front to back, 20 from the right end and 9 up from the bottom of the lip, for the light.

Push the 5 mm panel light in from the front: its 8 mm bezel sits on the front face. Stick the 120 x 10 name plate on the front face, 10 from the left end, level with the light.

Fit: glue the top to the front of the jacket's top panel with foam-safe adhesive, centred on the door, the lip resting on the front frame's top edge and its front flush with the frame.

Lead: out of the back, straight back along the top panel, right along its back edge to 23 from the right end, down the back panel to the controller's top; clips every 100 mm.

Check: the light shows when the controller switches it on.

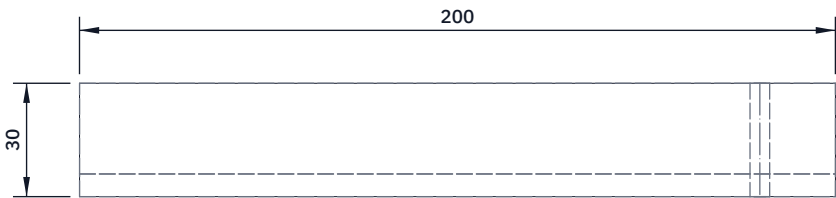

TOP VIEW

Scale 1:2; looking down (along -Z)



FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

CALRIG

github.com/BoujeeEnjinia1701/calrig

CalRig front badge: making sketch

DRAWING NO. CLR-DWG-112			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES PETG, 3D printed, 40 % infill					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand