


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC




TOP VIEW

Scale 1:10; looking down (along -Z)




FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

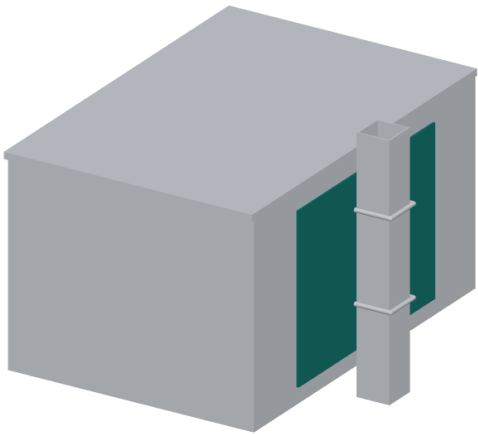

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 400 wide x 300 tall; round the corners about 5; file every edge.

Four 9 mm holes for the U-bolt legs: 34 each side of the centre line, 80 and 240 up from the bottom edge. Deburr both faces.

Fits: flat on the canal face of the post, bottom edge 480 above ground; the box back wall sits flat on its other face; the U-bolt legs pass through both.

CANALRUNG

github.com/BoujeeEnjinia1701/canalrung

Box mounting plate: making sketch

DRAWING NO. CNR-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium sheet 5052 or 6061, 4 mm, 400 x 300					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	