




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

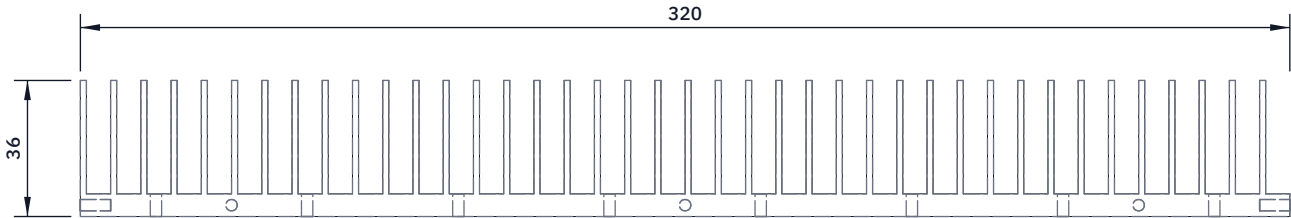


TOP VIEW
Scale 1:2; looking down (along -Z)

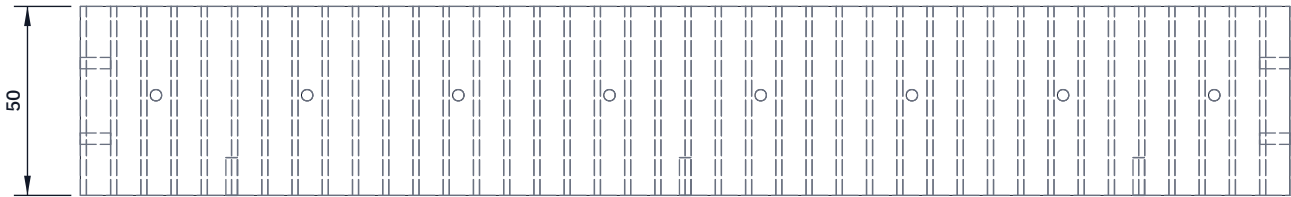

FRONT VIEW
Scale 1:2; looking at the front (along +Y)



RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

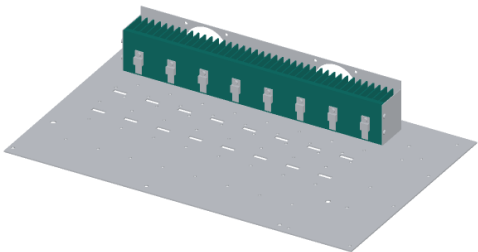

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Bought: a 6 mm spine 320 x 50 mm with 40 fins 30 mm deep at 8 mm pitch.

MOSFET holes: eight M3 tapped holes through the spine (drill 2.5), 26.5 mm up from the bottom edge, 20 mm from the left end and then every 40 mm, each midway between two fins. Deburr the front face flat.

Plate screws: three M3 tapped holes 10 mm deep in the bottom edge, centred in the spine's 6 mm thickness, 40, 160 and 280 mm from the left end.

Shroud screws: two M3 tapped holes 8 mm deep in each end of the spine, centred in its thickness, 15 and 35 mm up from the bottom edge.

Use cutting fluid; back the tap out often; the walls are thin.

Fit: stands on the plate, fins to the back; MOSFETs on the smooth face.

Check: an M3 screw runs freely into every hole.

CELLCHECK			github.com/BoujeeEnjinia1701/cellcheck		
CellCheck heatsink (bought, drilled and tapped): making sketch					
DRAWING NO. CCK-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium finned heatsink 320 x 36 x 50 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	