


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

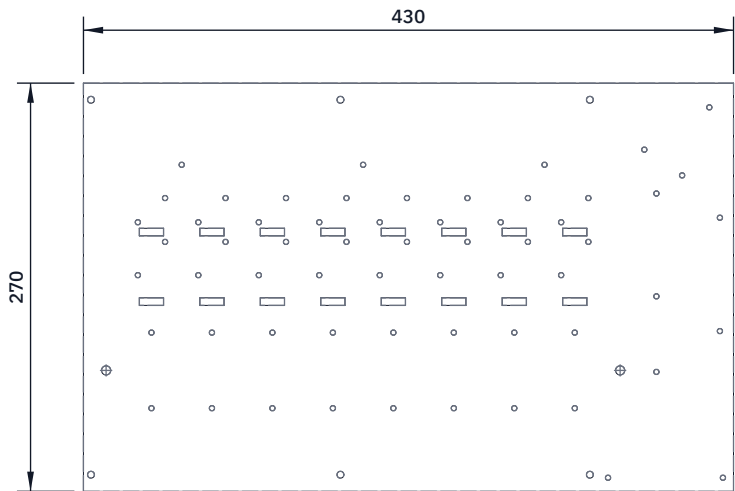


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

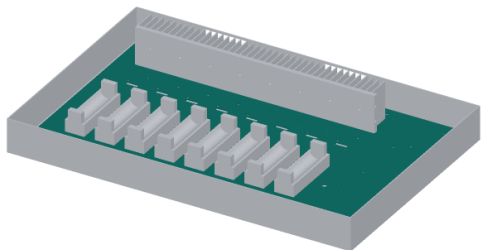

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Blank 430 x 270 mm, 1.5 mm aluminium; round the corners to 3 mm.

Measure every hole from the left edge and the front edge; the hole layout picture in the build plan gives every position.

Six 4.5 mm holes for the standoffs, 11 mm from the front and back.

Per channel (eight channels, 40 mm apart, first at 45 mm from the left):

two 3.4 mm holder screw holes; a 16 x 5 mm wire slot behind the

holder and another between the charger and the channel board;

four 3.4 mm holes for the board standoffs.

Two 6 mm holes for the guard rivet nuts; set M4 rivet nuts in them.

Three 3.4 mm heatsink screw holes; 3.4 mm holes for the right-hand bay.

Slots: drill 5 mm at each end, cut between, file; fit edge grommet strip.

Check: lay the holders and heatsink on it and look through each hole.

CELLCHECK

github.com/BoujeeEnjinia1701/cellcheck

CellCheck base plate: making sketch

DRAWING NO. CCK-DWG-103			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium sheet 1.5 mm, 5052 or 6061 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	