

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW

Scale 1:2; looking down (along -Z)




FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

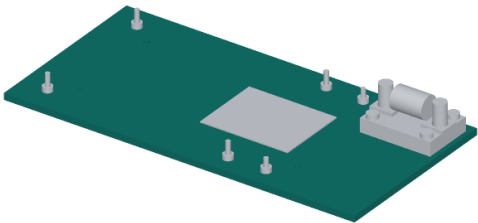

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Blank 220 x 110 mm, 4 mm aluminium, square; round the corners 3 mm.

Sizes from the signal end (left edge) and the centre line.

Board fixings: six 3.4 mm holes, countersunk 90 degrees from the BOTTOM face to 6.6 mm so M3 countersunk heads sit flush:

17 from the left edge 40 each side; 133 in, 44 each side;

156.5 in, 43.5 each side.

Fuse holder: four M4 tapped holes (drill 3.3) at 178 and 212 in, 21 and 45 to the B+ side of the centre line.

Mounting: four M4 tapped holes (drill 3.3) at 30 and 167 in, 30 each side. Screws come up from below and stop in the plate.

Deburr every hole; the top face must stay flat within 0.1 mm under the gap pad (it carries the MOSFET heat).

Check: lay the board on it; all six holes line up with the board's.

CELLGUARD

github.com/BoujeeEnjinia1701/cellguard

CellGuard base plate: making sketch

DRAWING NO.

CGD-DWG-101

REV

P1

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:2

UNITS

mm

PROJECTION



DATE

2026-09-30

DRAWN

Amish Chadha

MATERIAL / NOTES

Aluminium sheet 4 mm, 6061 class