


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC




TOP VIEW
Scale 2:1; looking down (along -Z)

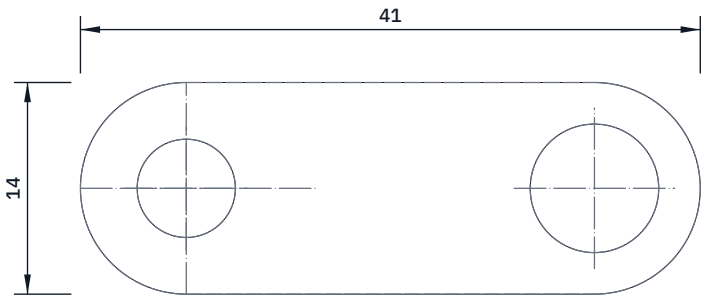

FRONT VIEW
Scale 2:1; looking at the front (along +Y)



RIGHT VIEW
Scale 2:1; looking at the right side (along -X)

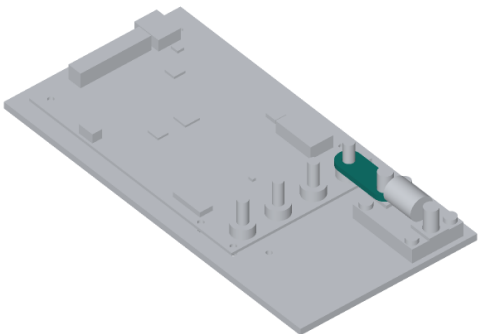

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 41 mm of 14 x 3 mm copper bar; file both ends to a 7 mm radius, centred on the hole centres.

Holes on the centre line, 27 mm apart: 6.5 mm at one end (B+ stud, M6), 8.5 mm at the other (fuse holder terminal, M8).

Deburr; clean both faces bright with an abrasive pad.

Slide 20 mm of heat-shrink over the middle and shrink it; leave the ends bare where they clamp.

Fit: lies flat on the B+ stud's shoulder and on the fuse blade at the holder's inner terminal, both 10.6 mm above the plate top.

An M6 and an M8 nut with spring washers hold it.

It carries the full pack current: both faces must be clean and flat where they touch.

Check: drops over both studs without bending.

CELLGUARD

github.com/BoujeeEnjinia1701/cellguard

CellGuard fuse link: making sketch

DRAWING NO. CGD-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Copper flat bar 14 x 3 mm, C101 or C110					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	