



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the build plan	2026-10-01	AC
P2	Second status light hole and shipping switch hole	2026-10-02	AC

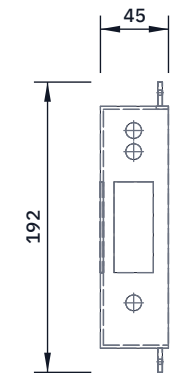


TOP VIEW

Scale 1:5; looking down (along -Z)




FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

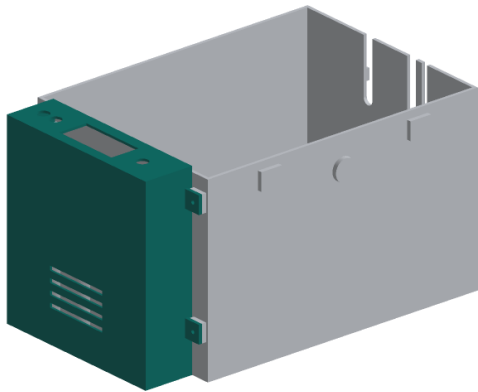

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Box 45 x 160 x 169.5 mm, 2 mm walls, open on the shell side.

End wall: four vent slots 60 x 4 from 30 up.

Top: display window 26 x 60, 9 mm from the end wall; 10.4 mm holes for the two status lights, 22 from the end wall, 50 toward the back and 50 toward the front; 10.4 mm hole for the shipping switch, 22 from the end wall, 64 toward the back.

Back wall: notch 8 x 12 at the shell end, 6 up, for the cable duct; four 3.4 mm holes for the logger standoffs.

Four ears like the cooling head's, mirrored.

Fit: four M3 screws through the ears into the shell pads.

Check: the display window lines up with the display's active area.

COLDPOD

github.com/BoujeeEnjinia1701/coldpod

ColdPod battery bay housing: making sketch

DRAWING NO. CPD-DWG-112			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES PETG or ASA, 3D printed, 2 mm walls					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand