


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW

Scale 1:5; looking down (along -Z)

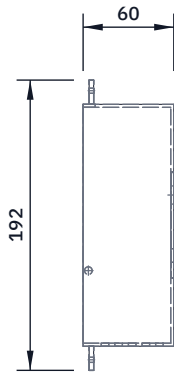


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

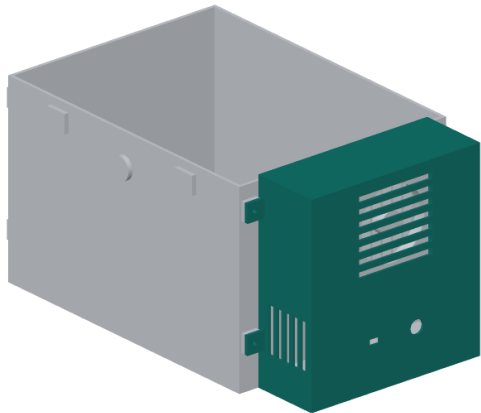

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Box 60 x 160 x 169.5 mm, 2 mm walls, open on the shell side.

End wall: seven grille slots 70 x 5 at 10 mm pitch from 94 up; 12 V socket hole 12 mm and USB-C slot 9 x 5, both 40 up, 20 each side.

Front: five intake slots 5 x 40, from 30 up. Floor: 5 mm drain hole 3.5 from the shell end, 30 toward the front; four 3.4 mm holes for the power board standoffs, 11 from each end, 62 each side.

Back wall: notch 8 x 12 at the shell end, 6 up, for the cable duct.

Four ears 3 mm thick on the side walls, 3.4 mm holes at 89 each side, 40 and 145 up.

Fit: open edge against the shell end; four M3 screws through the ears into the shell pads.

Check: the ears sit flat on all four pads at once.

COLDPOD

github.com/BoujeeEnjinia1701/coldpod

ColdPod cooling head housing: making sketch

DRAWING NO. CPD-DWG-110		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha
MATERIAL / NOTES PETG or ASA, 3D printed, 2 mm walls				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	