


| REV | DESCRIPTION                                | DATE       | BY |
|-----|--------------------------------------------|------------|----|
| P1  | Making sketch for the prototype build plan | 2026-10-01 | AC |

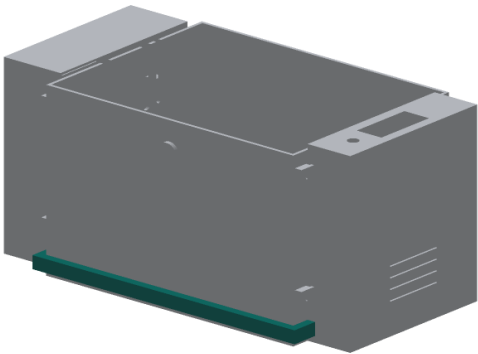

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS


A U-channel 8 deep x 12 tall with 1.5 mm walls, open toward the shell: 261 mm along the back face, turning 26 mm along each end face.

Print in three pieces (back run and two corners) and glue them.

Fit: lay the battery and sensor leads along the back face 6 to 18 mm up, then glue the cover over them with silicone along both edges.

Each end turns into the notch in its housing's back wall.

Check: no wire is pinched under an edge.

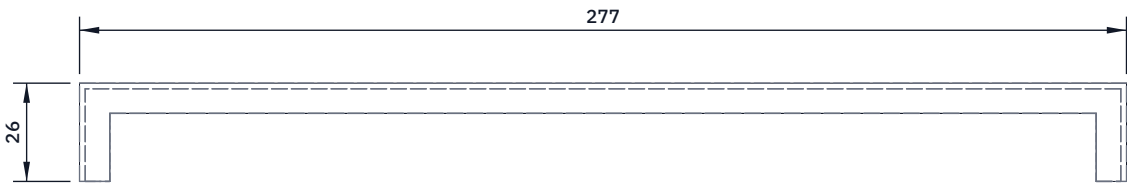

TOP VIEW

Scale 1:2; looking down (along -Z)



FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

|                                                                    |             |                                                                                                     |                                             |                 |                       |
|--------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------------------------|---------------------------------------------|-----------------|-----------------------|
| COLDPOD                                                            |             |                                                                                                     | github.com/BoujeeEnjinia1701/coldpod        |                 |                       |
| ColdPod cable duct cover: making sketch                            |             |                                                                                                     |                                             |                 |                       |
| DRAWING NO.<br>CPD-DWG-113                                         |             |                                                                                                     | REV<br>P1                                   | SHEET<br>1 of 1 | SIZE<br>ANSI B        |
| SCALE<br>1:2                                                       | UNITS<br>mm | PROJECTION<br> | DATE<br>2026-10-01                          |                 | DRAWN<br>Amish Chadha |
| MATERIAL / NOTES<br>PETG, 3D printed                               |             |                                                                                                     |                                             |                 |                       |
| Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com |             |                                                                                                     | Generated from cad/src; do not edit by hand |                 |                       |