


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

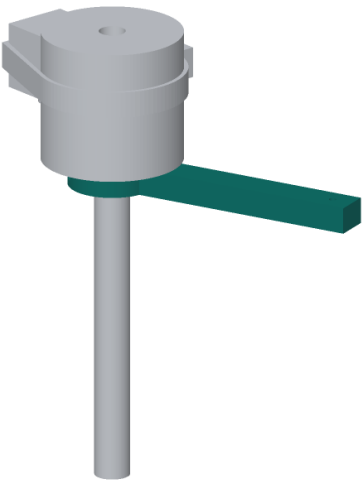

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

One piece cut from 12 mm plate: a 40 mm round boss and an arm 16 mm wide reaching 122 mm from the boss centre.

Bore the boss 16 mm (a sliding fit on the rod, ream if you can).


Wire eye: a 3.2 mm hole on the arm centre line, 112.4 mm from the bore centre; break both edges so the wire cannot chafe.

Saw a 1.5 mm slit from the bore out through the boss on the side opposite the arm.

Clamp screw: at 14 mm from the bore centre, square across the slit, drill 5.5 mm through the near jaw with a 9 mm spot face, and drill 4.2 mm and tap M5 in the far jaw.

Fit: slides on the lower rod from the top; its top face butts the underside of the anvil, which carries it at every blow. Turn the arm to point at the reel's wire exit, then tighten the M5 screw.

Check: slides on the rod with the screw slack; locks by hand.

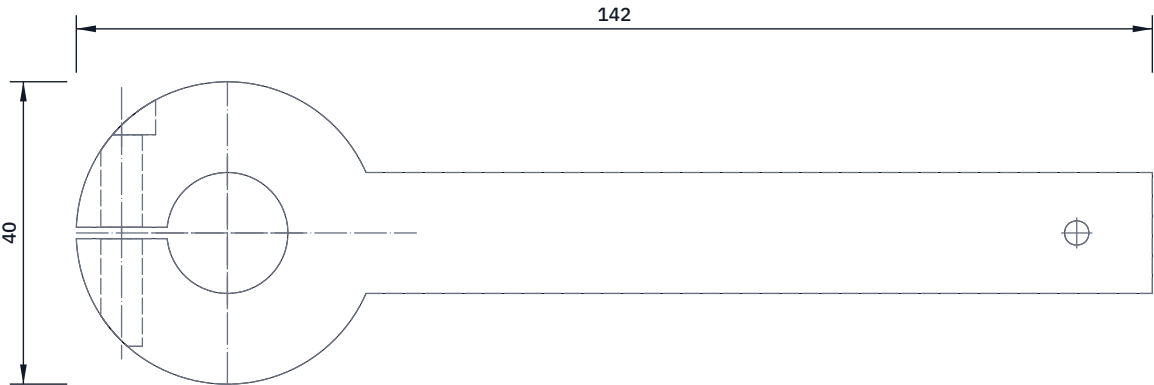


TOP VIEW

Scale 1:1; looking down (along -Z)



FRONT VIEW

Scale 1:1; looking at the front (along +Y)



RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

CONEPRO

github.com/BoujeeEnjinia1701/conepro

ConePro clamp collar and wire arm: making sketch

DRAWING NO. CNP-DWG-103			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium plate 12 mm, 6061 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	