




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

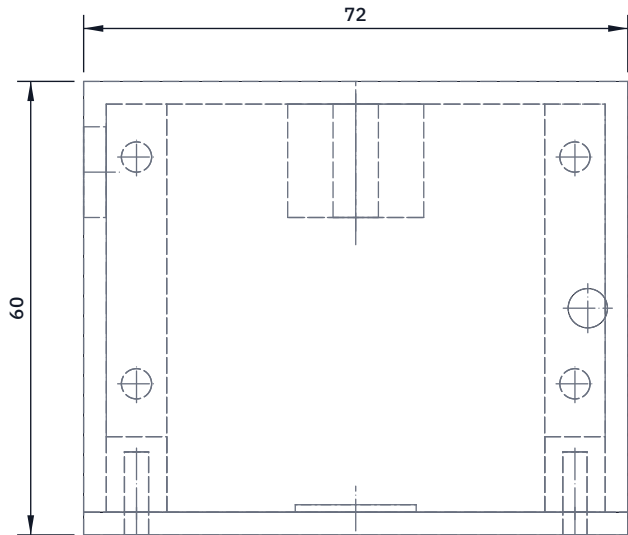


TOP VIEW
Scale 1:1; looking down (along -Z)

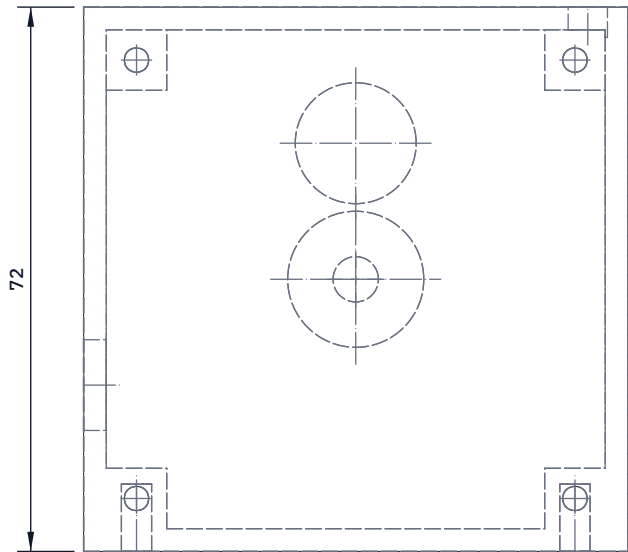

FRONT VIEW
Scale 1:1; looking at the front (along +Y)

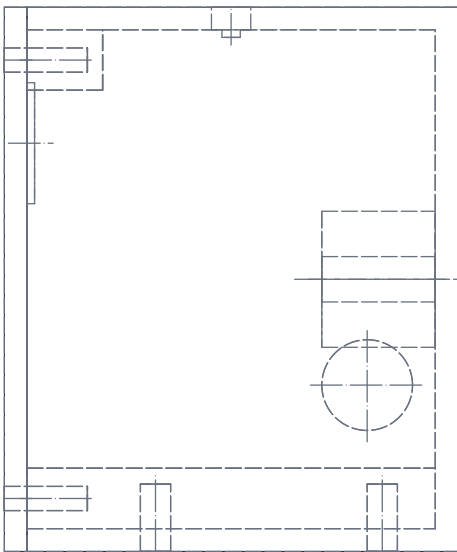

RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

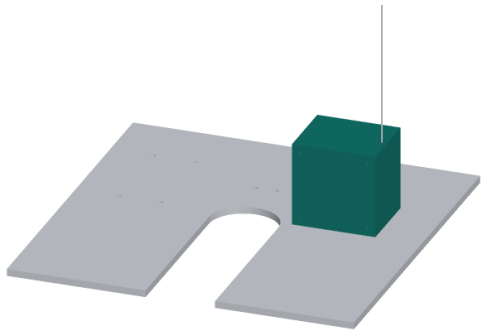

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Body: 72 wide x 57 deep x 72 tall outside, 3 mm walls, open on the front (-Y) face. Print standing on its base.

Inside, four 8 x 8 mm posts at the corners: the lower two run front to back, the upper two are 10 mm long at the front.

Bearing boss on the back wall, 18 mm diameter x 15 mm, centred 36 mm from the left face and 36 mm up: press in two 6 x 13 x 5 mm bearings.

Top: a 5.2 mm hole for the wire eyelet, 5.3 mm in from the right face and on the front-to-back centre line.

Left face: a 12 mm hole for the cable gland, 12 mm from the back and 22 mm up.

Inserts: M4 into the lower posts from below (two per post, 20 and 50 mm from the front); M3 into the four post ends at the front.

Lid: 72 x 72 x 3 mm, four 3.4 mm holes over the post ends, and a pad for the sensor board. Seal with a 1.5 mm cord in the joint.

CONEPRO

github.com/BoujeeEnjinia1701/conepro

ConePro draw-wire reel housing and lid: making sketch

DRAWING NO. CNP-DWG-111		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-09-30	DRAWN Amish Chadha
MATERIAL / NOTES Printed ASA or PETG, 100 % infill walls; brass heat-set inserts				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	