BUILD PLAN SKETCH, PLAN NOT YET BUILT

CrossSafe · github.com/BoujeeEnjinia1701/crosssafe

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

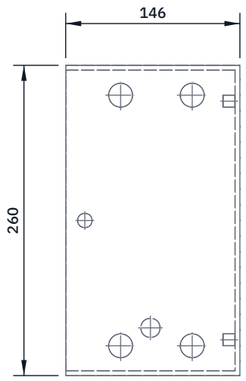

TOP VIEW

Scale 1:5; looking down (along -Z)

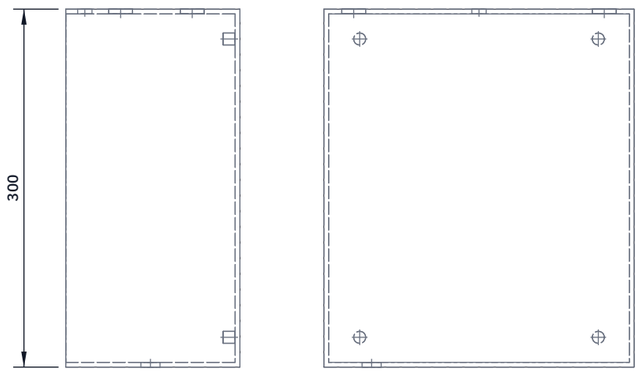

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

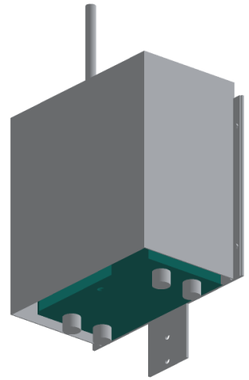

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Drawn upside down: the top view shows the bottom face as you see it with the box standing on its roof, back face toward you.

Back face: the face that goes on the mounting plate. Measure from it, and sideways from the centre line.

Bottom face, four 20 mm holes for M20 glands: 40 and 100 mm from the back face, 105 mm each side of the centre line.

Vent: one 12 mm hole 130 mm from the back face on the centre line.

Roof: one 16 mm hole for the antenna, 75 mm from the back face and 90 mm toward the kerb side.

Tape the faces, pilot drill 3 mm with wood behind, open out with a step drill at low speed. No solvents: polycarbonate crazes.

Fit the lug kit to the four back corners as its maker describes.

Check: each hole size against the part's datasheet; no cracks.

CROSSSAFE

github.com/BoujeeEnjinia1701/crosssafe

CrossSafe enclosure body: drilling sketch

DRAWING NO.	REV	SHEET	SIZE
CRS-DWG-102	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES

Bought IP65 polycarbonate box 150 x 260 x 300 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand