
BUILD PLAN SKETCH, PLAN NOT YET BUILT


CrossSafe · github.com/BoujeeEnjinia1701/crosssafe

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

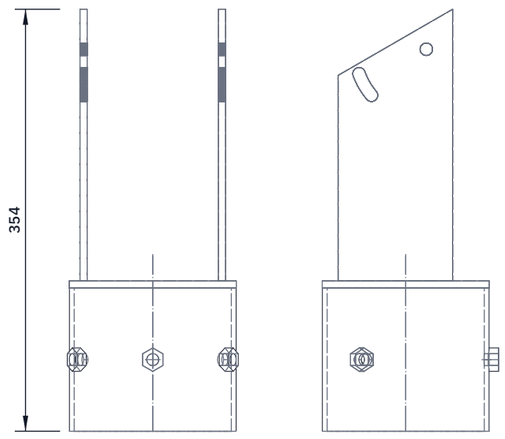


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

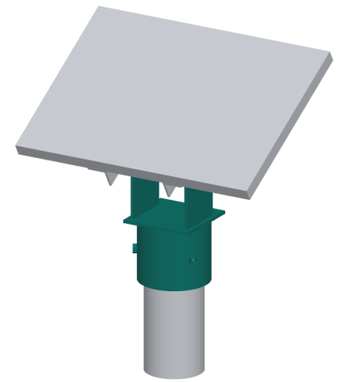

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Socket: 120 mm of 139.7 x 4 mm tube. Three 10.5 mm holes 60 mm below its top, 120 degrees apart, one toward the kerb; weld an M10 nut over each.

Cap: 140 x 140 x 6 mm plate, welded on top of the socket all round.

Cheeks: two from 6 mm plate, 96 mm wide, cut to the outline in the right view (top edge sloped at 30 degrees), standing on the cap with their inside faces 110 mm apart; weld both sides.

Each cheek: a 10.5 mm pivot hole, and a tilt slot 10.5 mm wide on a 60 mm radius round the pivot, 20 degrees long (chain drill, file).

Clean the welds; galvanize or prime and paint.

Fit: the socket slides over the post top until the cap sits on it; three M10 set screws centre and lock it. The rails bolt to the outside of the cheeks.

Check: the cheeks are parallel and square to the cap.

CROSSSAFE

github.com/BoujeeEnjinia1701/crosssafe

CrossSafe panel bracket: making sketch

DRAWING NO.	REV	SHEET	SIZE
CRS-DWG-108	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES

Steel tube 139.7 x 4 mm, plate 6 mm, S235; galvanized or painted

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand