



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

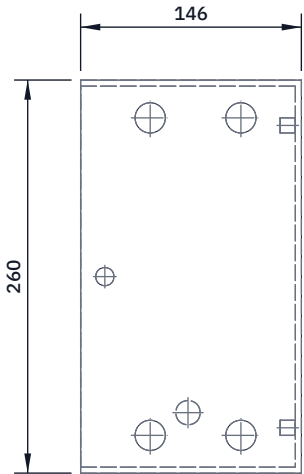


TOP VIEW

Scale 1:5; looking down (along -Z)

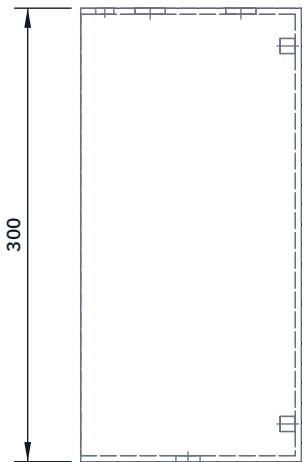


FRONT VIEW

Scale 1:5; looking at the front (along +Y)

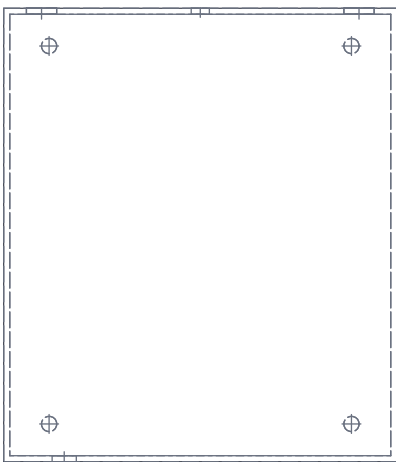

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

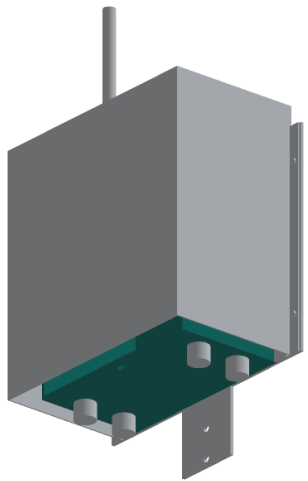

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Drawn upside down: the top view shows the bottom face as you see it with the box standing on its roof, back face toward you.

Back face: the face that goes on the mounting plate. Measure from it, and sideways from the centre line.

Bottom face, four 20 mm holes for M20 glands: 40 and 100 mm from the back face, 105 mm each side of the centre line.

Vent: one 12 mm hole 130 mm from the back face on the centre line.

Roof: one 16 mm hole for the antenna, 75 mm from the back face and 90 mm toward the kerb side.

Tape the faces, pilot drill 3 mm with wood behind, open out with a step drill at low speed. No solvents: polycarbonate crazes.

Fit the lug kit to the four back corners as its maker describes.

Check: each hole size against the part's datasheet; no cracks.

CROSSSAFE

github.com/BoujeeEnjinia1701/crosssafe

CrossSafe enclosure body: drilling sketch

DRAWING NO. CRS-DWG-102		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-30	DRAWN Amish Chadha
MATERIAL / NOTES Bought IP65 polycarbonate box 150 x 260 x 300 mm				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	