


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

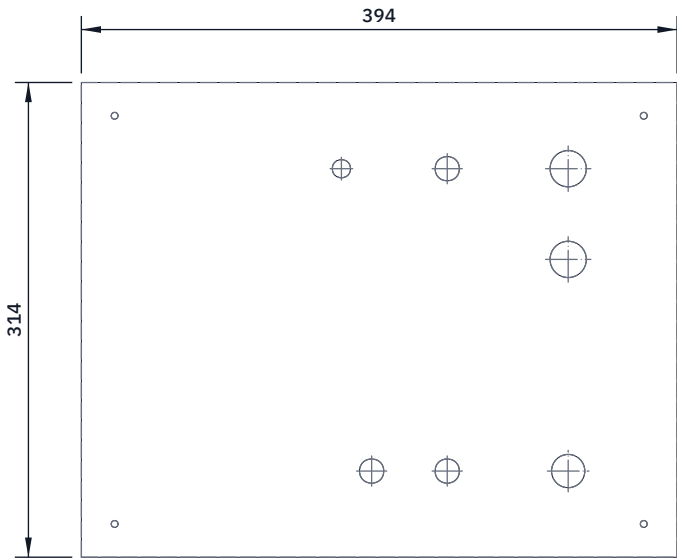


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

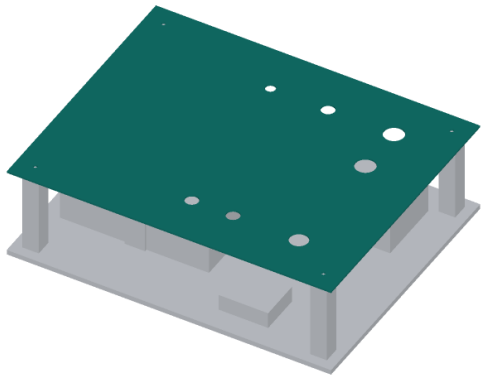

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 394 x 314 mm from 2 mm sheet; round the corners 5 mm.
Holes, from the panel's end nearest the reel, and from the centre line
(stop side marked A, connector side marked B):
emergency stop 22 mm at 322 along, 100 A; fuse holders 16 mm
at 242 and 192 along, 100 A; tether connector 24 mm at 322, 40 B;
Ethernet 24 mm at 322, 100 B; charge port 16 mm at 242, 100 B;
power switch 12 mm at 172, 100 B.
Four 4.5 mm holes 22 mm in from each corner for the posts.
Label every part on the panel; the stop gets a yellow ring label.
Fit: on the four posts with M4 screws; the lid closes over the
stop with 19 mm to spare.
Check: the lid closes and latches with every part fitted.

CULVERTCRAWL

github.com/BoujeeEnjinia1701/culvertcrawl

CulvertCrawl surface box panel: making sketch

DRAWING NO. CVC-DWG-119			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES 5052 aluminium sheet 2 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand