



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC




TOP VIEW

Scale 1:2; looking down (along -Z)

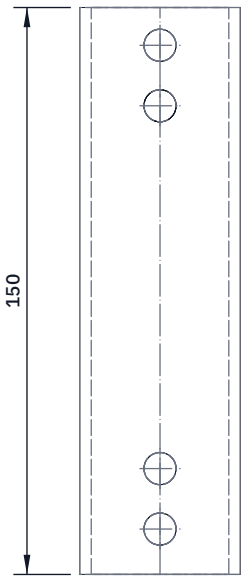


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

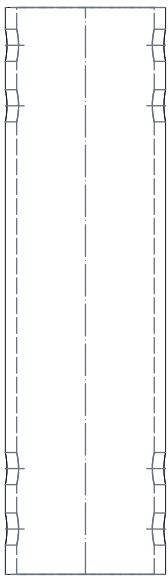

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

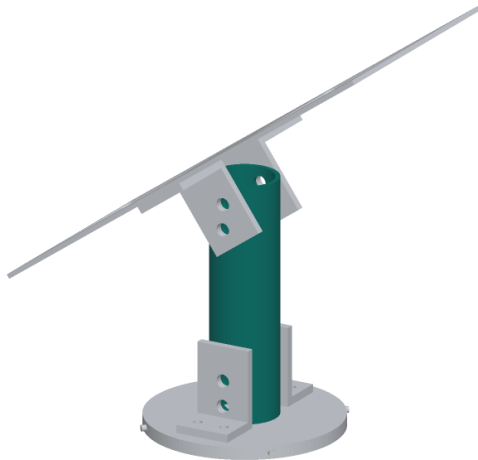

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 150 mm of 42.4 x 3.0 tube; square both ends and deburr.

Fit a plug in each end first (next sheet), then drill the post and plug together, straight across, 8.5 mm:

bottom end: 12 and 28 mm up from the bottom;

top end: 10 and 26 mm down from the top.

All four holes lie in one plane: drill in a V-block on a drill press.

Fit: the bottom end stands on the cap disc between the lower clips;

the top end sits between the upper clips under the rail plate,

4 mm clear of it. Two M8 bolts through each end.

Check: a rod passes straight through each hole pair.

CURBCOUNT

github.com/BoujeeEnjinia1701/curbcount

CurbCount post: making sketch

DRAWING NO. CBC-DWG-111			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium round tube 42.4 x 3.0 mm, 6063					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	