BUILD PLAN SKETCH, PLAN NOT YET BUILT

DewDrive · github.com/BoujeeEnjinia1701/dewdrive

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

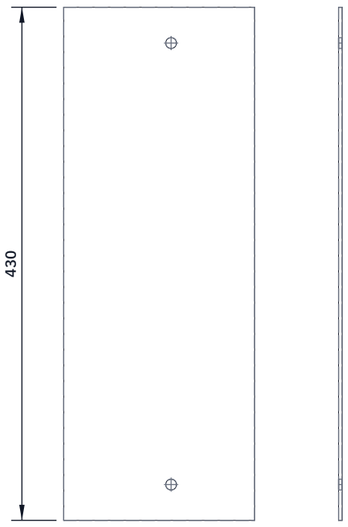

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Plate 160 x 430 x 3 mm; corners rounded.
Two 9 mm holes 90 from its west edge, 30 from the top and bottom, for the M8 bolts into the north-west leg's outward leg.
Mark and drill the electronics box's four fixing holes through the box itself (box centred 20 west of the bolts, 60 above the bottom of the plate); M5 screws and nyloc nuts.
Sensor shield arm: 20 x 3 aluminium strip bent to a Z, riveted to the plate's top corner; the bought shield screws to its top.
Fit: on the north face of the leg, so the box faces north, shaded by the collector, its lid away from the frame.
Check: the box lid opens fully.

DEWDRIVE

github.com/BoujeeEnjinia1701/dewdrive

DewDrive electronics backing plate: making sketch

DRAWING NO.	REV	SHEET	SIZE
DWD-DWG-122	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-01	Amish Chadha

MATERIAL / NOTES

Aluminium sheet 3 mm

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand