




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

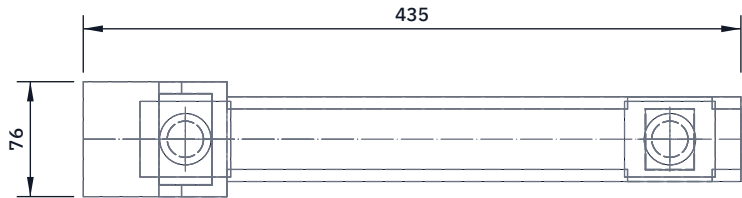


TOP VIEW
Scale 1:5; looking down (along -Z)

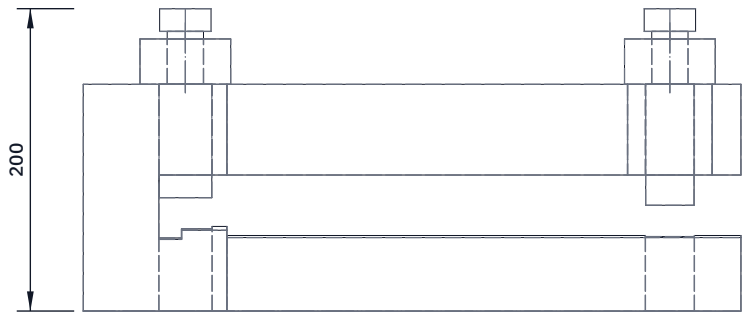

FRONT VIEW
Scale 1:5; looking at the front (along +Y)



RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

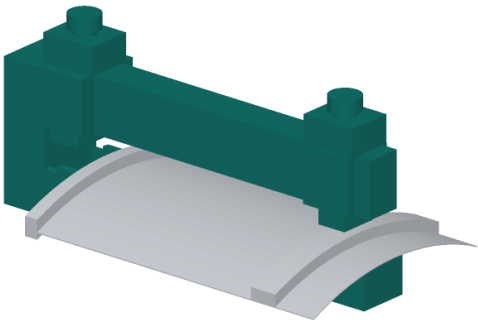

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

C-frame from S355 plate: back 50 x 76 x 150 mm; lower jaw 56 x 50 mm and upper jaw 40 x 60 mm, 385 mm long; gap 40 mm.

Die faces ground to the drum's inside radius (286 mm; 280 mm at the chime station).

Station 1, at the back: open-ended chime notch 60 x 35 mm.

Station 2, 338 mm out: hoop slot 40 x 32 mm.

Punches D2, faces raked 10 degrees (roof shape); dies D2, punch to die clearance 0.1 to 0.2 mm a side; harden both.

Each punch is pushed by a Tr24 x 5 screw in a bronze nut block, through a needle thrust bearing; 500 mm ratchet lever.

Fit: chime: back face on the drum end. Hoop: drum end against the station 1 die block, jaw in through the chime notch.

Check: a punch enters its die by hand with even clearance.

DRUMPANEL

github.com/BoujeeEnjinia1701/drumpanel

DrumPanel lever notching punch: making sketch

DRAWING NO. DMP-DWG-121			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES S355 plate; D2 punches and dies; Tr24 x 5 screws in bronze nuts					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand