



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW

Scale 2:1; looking down (along -Z)

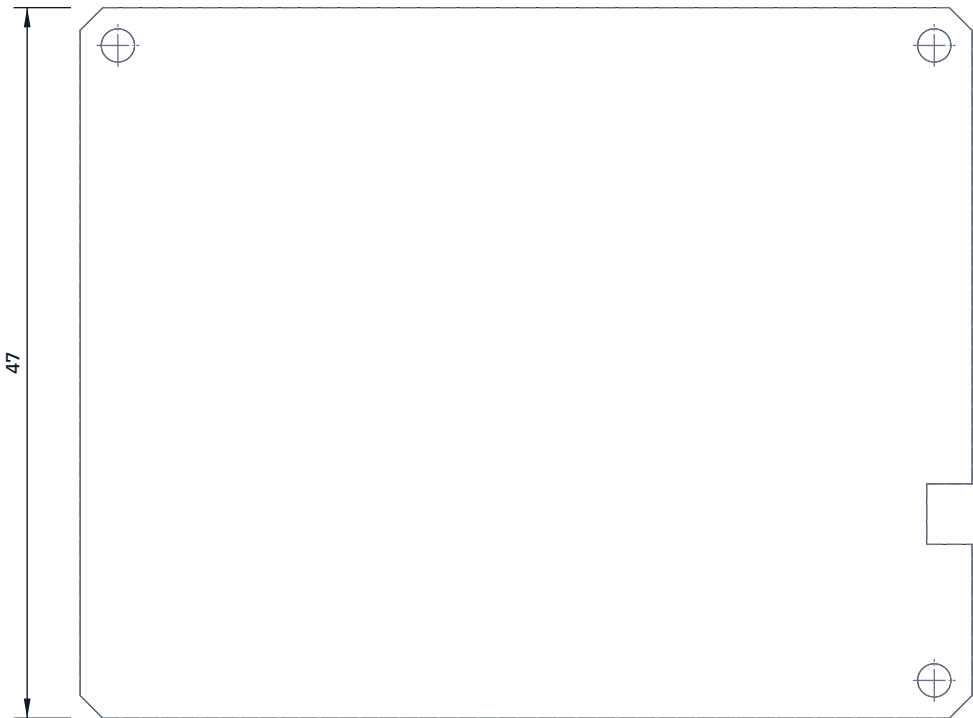


FRONT VIEW

Scale 2:1; looking at the front (along +Y)



RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

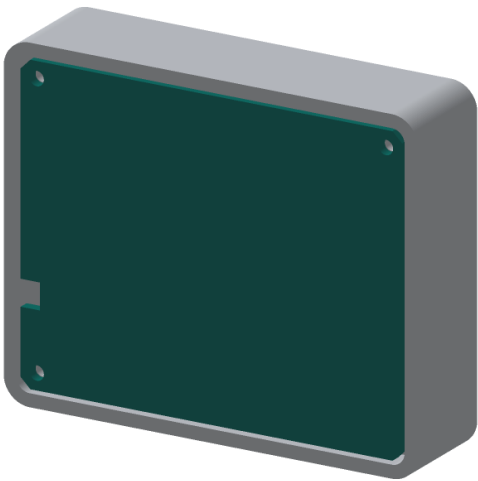

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut perfboard to 59 x 47 mm; file the edges straight and cut each corner off 1.5 mm at 45 degrees to clear the shell corners.

Three 2.2 mm holes at the boss positions (seen from the front: 27 left and 27 right 21 up from the centre, 27 right 21 down).

A notch 3 wide and 4 tall in the right edge, centred 10 below the centre, for the cell lead.

Front face (toward the sensor), right-hand strip: controller module on headers 12 to 30 right, 3.5 below to 17.5 above centre; charger module 12.6 to 23.6 right, from the bottom edge up 19 mm, its USB-C 1.2 below the bottom edge.

The sensor's back rests on the left part of the front face.

Check: the board sits flat on the three bosses.

DUSTBADGE

github.com/BoujeeEnjinia1701/dustbadge

DustBadge carrier board: making sketch

DRAWING NO. DBG-DWG-107			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Perfboard, 2.54 mm pitch, 1.6 mm FR4					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	